




Very HRC Fuses 6x32 400V - FA/FB Very Fast Acting

Approvals UL recognized E 76491

FROM 0,1 TO 20A

Dimensions

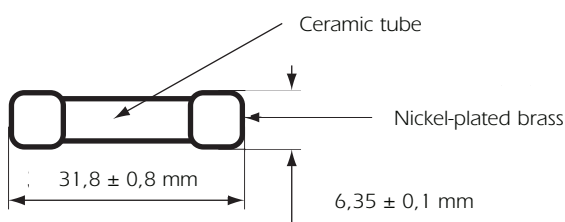

Fuses with filler
Max weight : 2,5 g

Basic Characteristics

Size	Rated Voltage	Rated Current	Breaking Capacity	[I ² t] Pre-arcing	[I ² t] Total clearing at Un	Max voltage drop at In	Designation	Reference Number	Catalog Number
mm	VAC	A		A ² s		V			
6,3 x 32	400	0,100	200 kA 400 VAC cos φ ≥ 0,2	0,00057	0,0016	2,75	400 V FA 0,100 A 6x32	H078920	MI6FA40V0,1
		0,125		0,00077	0,0021	2,60	400 V FA 0,125 A 6x32	F084369	MI6FA40V0,125
		0,160		0,002	0,006	2	400 V FA 0,160 A 6x32	M084352	MI6FA40V0,16
		0,200		0,0046	0,013	1,7	400 V FA 0,200 A 6x32	G084370	MI6FA40V0,2
		0,250		0,009	0,025	1,55	400 V FA 0,250 A 6x32	N084353	MI6FA40V0,25
		0,315		0,016	0,045	1,45	400 V FA 0,315 A 6x32	D084367	MI6FA40V0,315
		0,400		0,03	0,085	1,4	400 V FA 0,400 A 6x32	H084371	MI6FA40V0,4
		0,500		0,05	0,15	1,4	400 V FA 0,500 A 6x32	P084354	MI6FA40V0,5
		0,630		0,12	0,35	1,15	400 V FA 0,630 A 6x32	E084368	MI6FA40V0,63
		0,800		0,25	0,72	1	400 V FA 0,800 A 6x32	L084351	MI6FA40V0,8
		1,000		0,11	0,25	0,71	400 V FA 1,000 A 6x32	Q084355	MI6FA40V0,1
		1,250		0,26	0,6	0,55	400 V FA 1,250 A 6x32	R084356	MI6FA40V1,25
		1,600		0,39	0,9	0,65	400 V FA 1,600 A 6x32	S084357	MI6FA40V1,6
		2,000		0,81	1,9	0,55	400 V FA 2,000 A 6x32	T084358	MI6FA40V2
		2,500		1,44	3,2	0,52	400 V FA 2,500 A 6x32	V084359	MI6FA40V2,5
		3,150		2,46	5,5	0,53	400 V FA 3,150 A 6x32	W084360	MI6FA40V3,15
		4,000		4,6	10	0,48	400 V FA 4,000 A 6x32	X084361	MI6FA40V4
		5,000	150 kA 400 VAC cos φ ≥ 0,2	11	25	0,37	400 V FA 5,000 A 6x32	Y084362	MI6FA40V5
		6,300		1,1	12	0,22	400 V FA 6,300 A 6x32	Z084363	MI6FA40V6,3
		8		2	21	0,22	400 V FA 8,000 A 6x32	A084364	MI6FA40V8
		10		3,1	35	0,20	400 V FA 10,000 A 6x32	B084365	MI6FA40V10
		12,5		4,5	47	0,22	400 V FA 12,500 A 6x32	C084366	MI6FA40V12,5
		16*		5,3	55	0,29	400 V FB 16,000 A 6x32	K084373	MI6FB40V16
		20*				654	400 V FA 20,000 A 6x32	H203350	MI6FA40V20

*Rating out of standards.

Ratings lower than 0,1A : please enquire.


Very HRC Fuses

6x32


400V - FA/FB Very Fast Acting

Time-current characteristics


400V FA 6x32

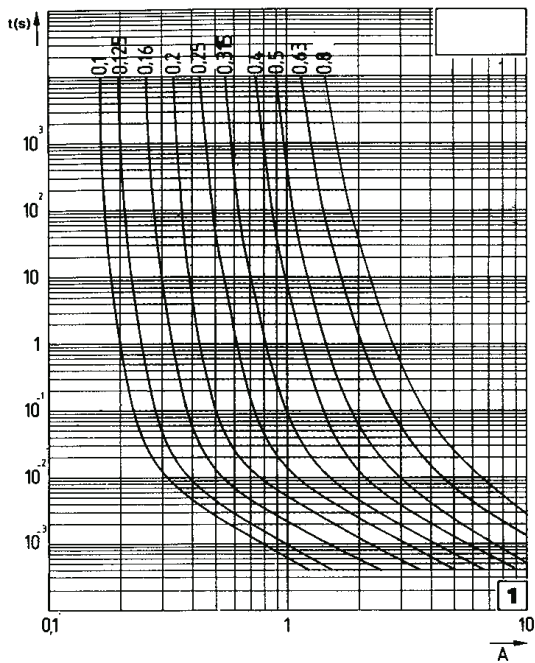

400V FA 6x32

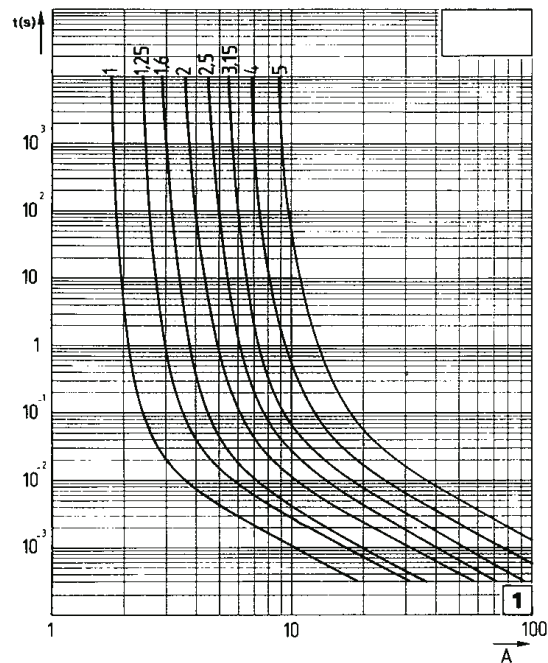

400V FA 6x32

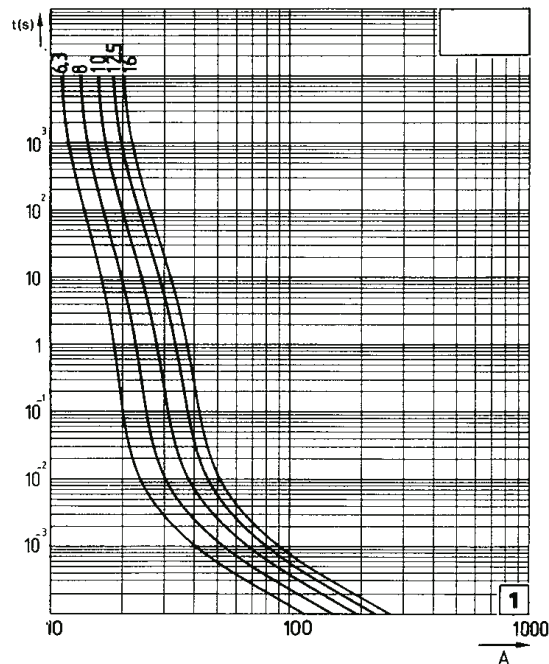

I margin $\pm 12\%$. Actual prearcing time(s). R.M.S. Value of prearcing current (A).

Packaging: Blister per 50 pièces.

For a 500 pieces box packaging consult us.