




LED converter 700 mA, DALI dimmable (digital)

Article no. 17788010

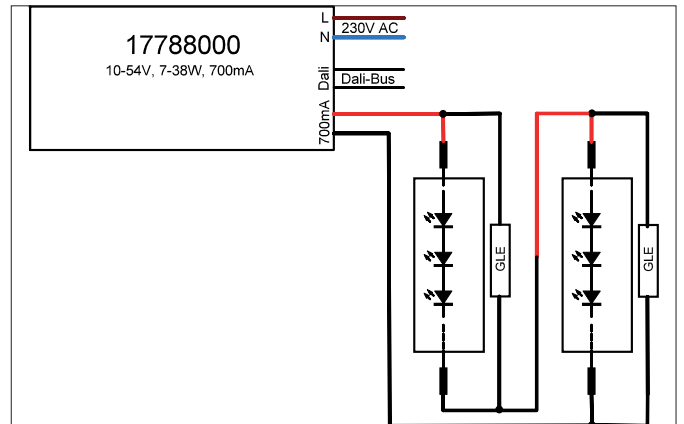

Tender

LED converter 700 mA, DALI dimmable (digital), white, Rectangular. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz , Power: 38 W, Dimmable: Yes, Type of dimming: DALI-2/PUSH.

| Article data | |
|-------------------|---|
| Article no. | 17788010 |
| GTIN | 4251433924180 |
| Short description | LED converter 700 mA, DALI dimmable (digital) |
| Material | Plastic |
| Colour | white |
| Shape | Rectangular |
| Length | 146.5 mm |
| Width | 44 mm |
| Hight | 30 mm |
| Weight | 0.153 kg |
| stamp | ENEC 05, EL |
| Conformance | CE, UKCA |


LED converter 700 mA, DALI dimmable (digital)

Article no. 17788010

| Operating technology of driver | |
|---|---------------------|
| AC nominal voltage min | 198 V |
| AC nominal voltage max | 264 V |
| Frequency min | 47 Hz |
| Frequency max | 63 Hz |
| DC nominal voltage min | 176 V |
| DC nominal voltage max | 275 V |
| Protection class | II |
| Degree of protection | IP20 |
| Power | 7 W |
| Power max. | 38 W |
| Output_ripple_current | 3 |
| Starting current | 5 A, 50 µs |
| Suitable for emergency lighting | No |
| measure point (tc) | 85 °C |
| Version | without |
| Power factor | 0.95 |
| Output voltage max | 54.00 V |
| Output voltage min. | 10.00 V |
| Control | DALI-2/PUSH |
| Number of poles | 4 |
| Environment temperature (ta) | -25 °C up to +45 °C |
| Measure point (tc) | 85 °C |
| Output current | 700 mA |
| Safety devices against thermal overload | yes |

| Packing data | |
|-------------------------|--|
| Gross weight | 0.173 kg |
| Length of packaging | 45 mm |
| Packaging width | 35 mm |
| Packaging height | 190 mm |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |