

# Protistor® size 27x60 gR (gRB)

800VAC (IEC)

SEMICONDUCTOR PROTECTION FUSES

IEC HIGH-SPEED CYLINDRICAL FUSE-LINKS AC PROTECTION



The 800VAC Protistor® BS88-4 fuse-link provides maximum flexibility in equipment design and ultimate protection for small power conversion equipment. These fast acting gR fuses have been engineered to provide full range protection to eliminate all overloads and semiconductor fault. They are assembled with die-cut elements embedded in solidified sand, which helps control arcing characteristics for a lower I<sup>2</sup>t and high interrupting rating level. Each fuse-link is embedded with a trip-indicator.

TECHNICAL DATA OVERVIEW

Rated voltage AC (IEC)	800 V
Ampere Range (A)	8 ... 110 A
Speed/Characteristic	gR
I.R. AC (IEC)	90 kA
Size per Standard	27x60mm

FEATURES & BENEFITS

- International size 27x60 mm for worldwide acceptance
- Extremely fast acting
- Eliminate all overloads
- Low I<sup>2</sup>t for improved semiconductor protection
- Excellent cycling capability
- Selective coordination with other fuses

APPLICATIONS

- Protection of small inverters
- Protection of UPS systems
- Protection of motor drives
- Protection of similar 800VAC or less equipment

STANDARDS

- IEC 60269-4 Compliance



# Protistor® size 27x60 gR (gRB)

800VAC (IEC)

## PRODUCT RANGE



FR27GB80V110T

### Size 27x60 gRB 800VAC with trip-indicator


Catalog number	Item number	Rated voltage AC (IEC)	Rated current I <sub>n</sub>	Clearing i <sup>2</sup> t at Rated Voltage	Rated breaking capacity AC	Power dissipation at I <sub>n</sub>	Package	Weight
FR27GB80V8T	R221436	800 V	8 A	70 A <sup>2</sup> s	90 kA	2 W	3/10	80 g
FR27GB80V10T	S221437	800 V	10 A	100 A <sup>2</sup> s	90 kA	2.3 W	3/10	80 g
FR27GB80V12T	T221438	800 V	12 A	180 A <sup>2</sup> s	90 kA	2.5 W	3/10	80 g
FR27GB80V16T	V221439	800 V	16 A	250 A <sup>2</sup> s	90 kA	3.5 W	3/10	80 g
FR27GB80V20T	W221440	800 V	20 A	350 A <sup>2</sup> s	90 kA	4 W	3/10	80 g
FR27GB80V25T	X221441	800 V	25 A	600 A <sup>2</sup> s	90 kA	5 W	3/10	80 g
FR27GB80V32T	Y221442	800 V	32 A	1100 A <sup>2</sup> s	90 kA	6 W	3/10	80 g
FR27GB80V40T	Z221443	800 V	40 A	1400 A <sup>2</sup> s	90 kA	8 W	3/10	80 g
FR27GB80V50T	A221444	800 V	50 A	2700 A <sup>2</sup> s	90 kA	8.5 W	3/10	80 g
FR27GB80V63T	B221445	800 V	63 A	5500 A <sup>2</sup> s	90 kA	10 W	3/10	80 g
FR27GB80V80T	C221446	800 V	80 A	11000 A <sup>2</sup> s	90 kA	11.5 W	3/10	80 g
FR27GB80V100T	D221447	800 V	100 A	19000 A <sup>2</sup> s	90 kA	13 W	3/10	80 g
FR27GB80V110T	E221448	800 V	110 A	26500 A <sup>2</sup> s	90 kA	14 W	3/10	80 g

# Protistor® size 27x60 gR (gRB)

800VAC (IEC)

## TIME CURRENT CHARACTERISTIC CURVES

### CP 27x60 gRB 800VAC

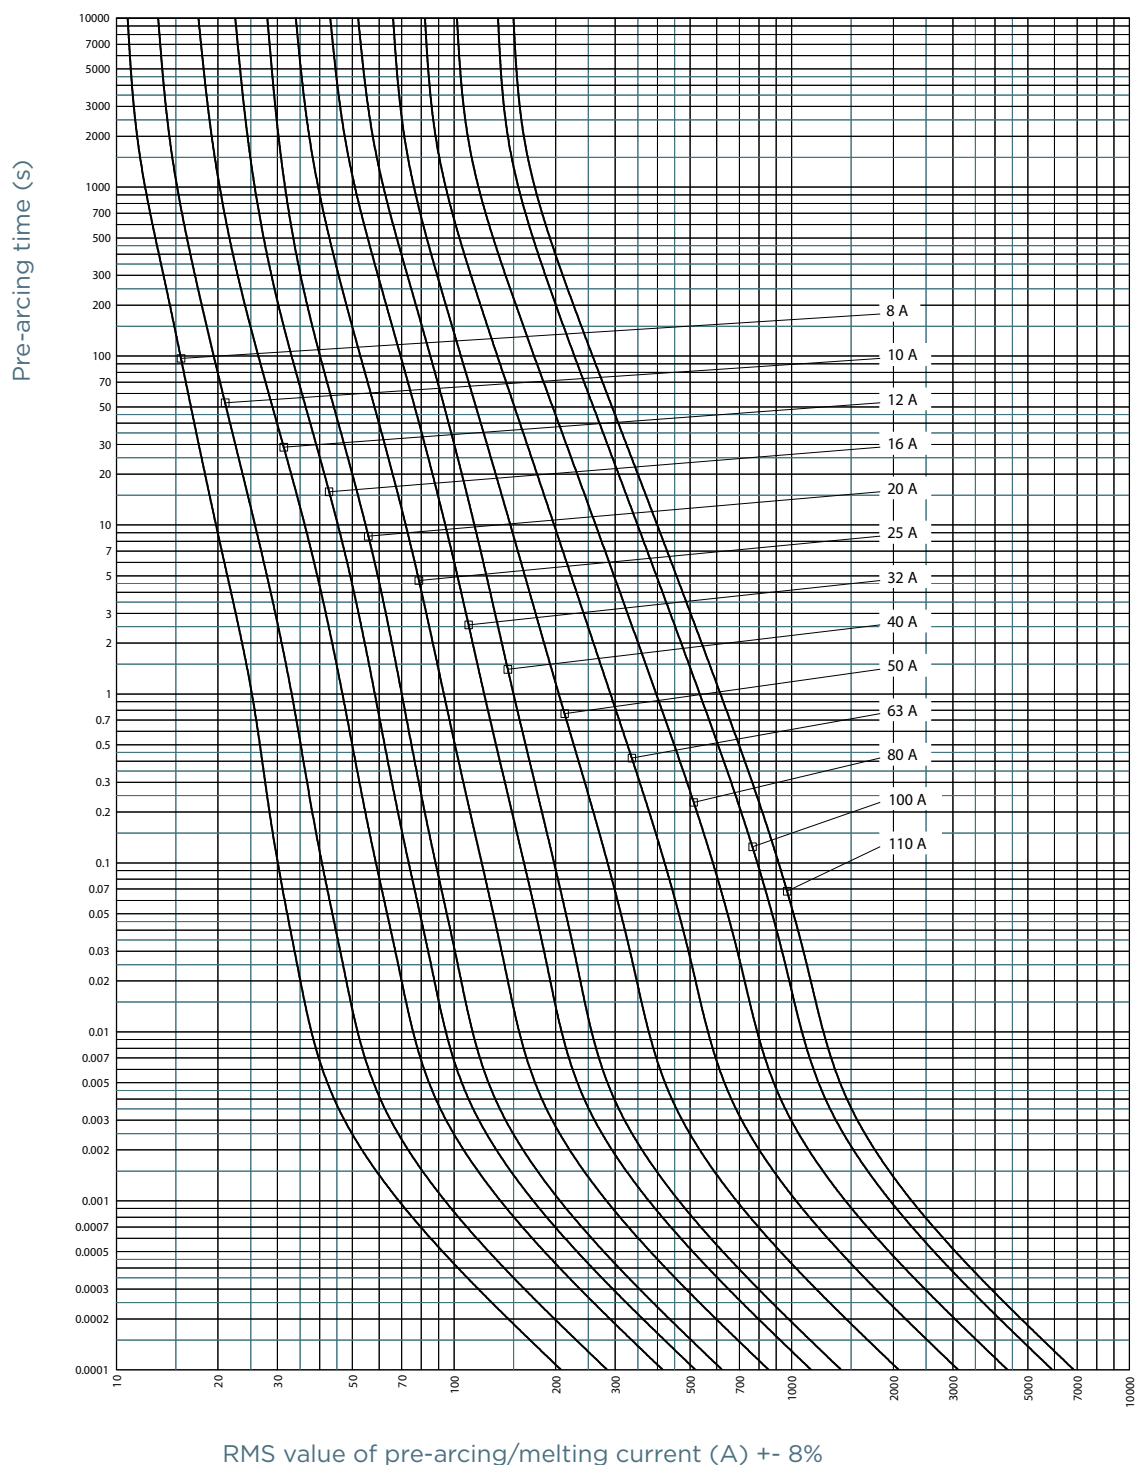


# Protistor® size 27x60 gR (gRB)

800VAC (IEC)

## CUT-OFF CURRENT CHARACTERISTIC

### CP 27x60 gRB 800VAC

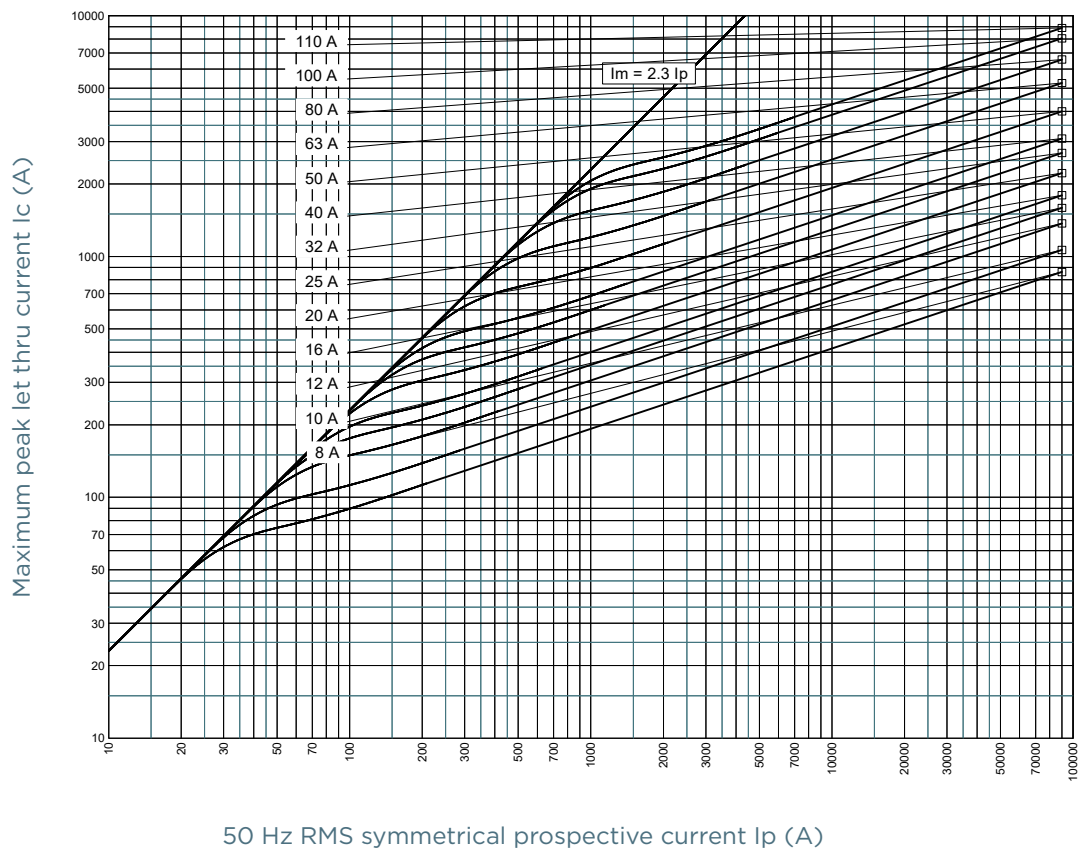


# Protistor® size 27x60 gR (gRB)

800VAC (IEC)


## I<sup>2</sup>T MULTIPLIER COEFFICIENT

### CP 27x60 gRB 800VAC

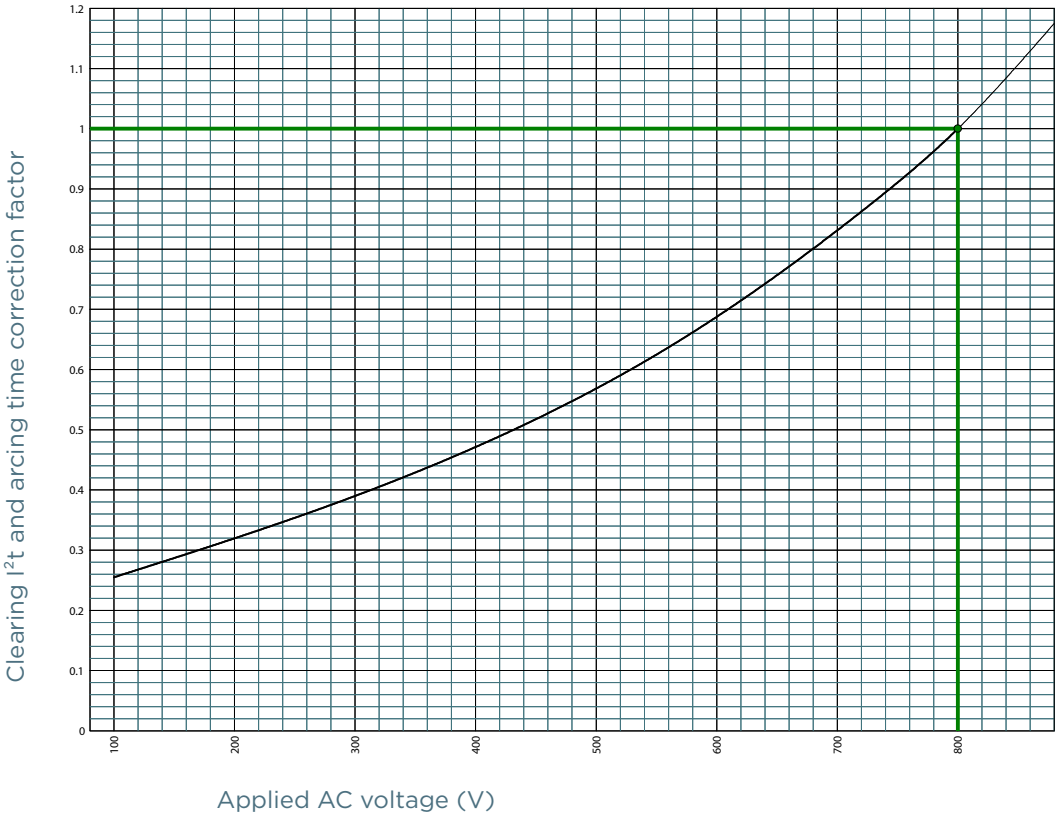

CHARACTERISTICS TOTAL I²T CURVE

CP 27x60 gRB 800VAC

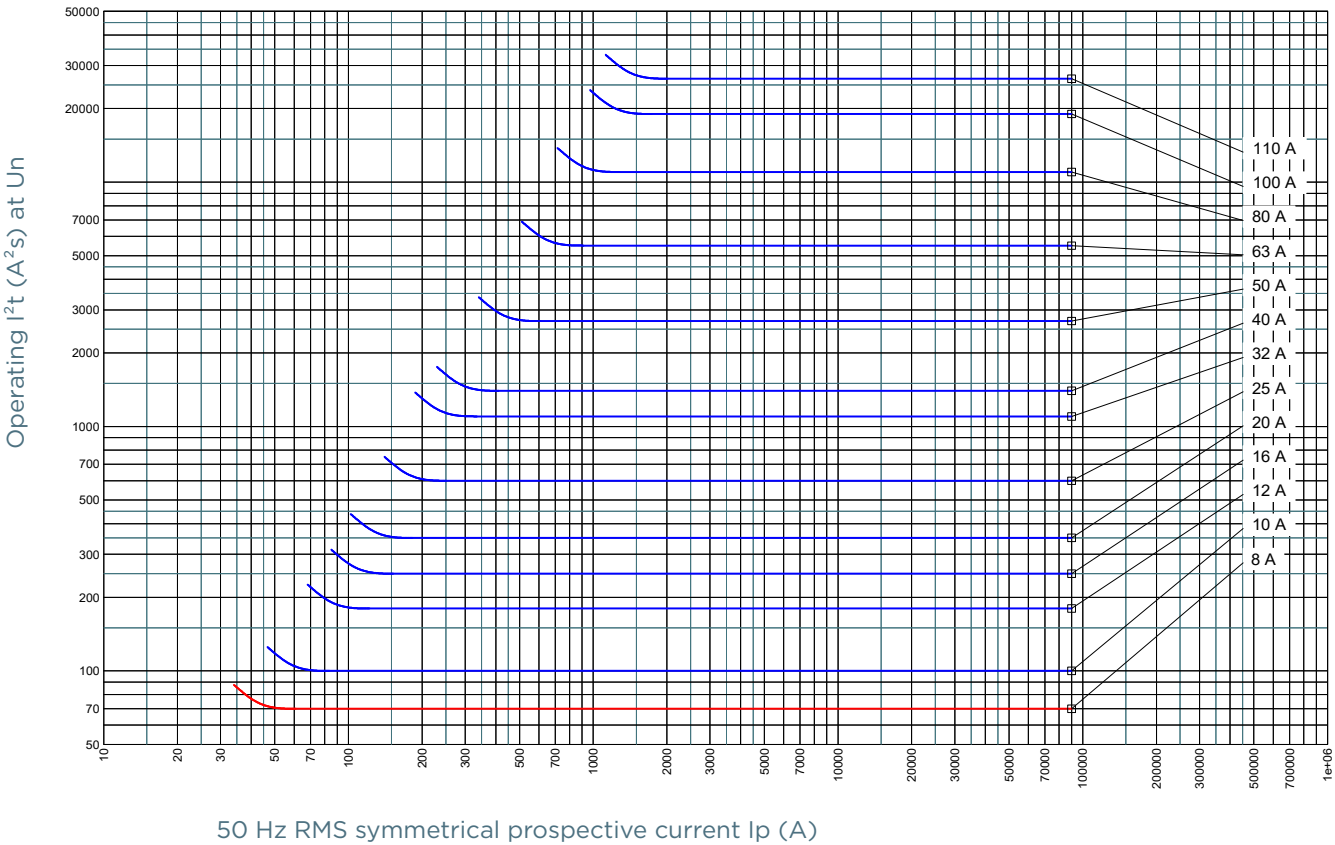


# Protistor® size 27x60 gR (gRB)


800VAC (IEC)

## L/R TIME CONSTANT VS DC VOLTAGE CAPABILITY

### CP 27x60 gRB 800VAC

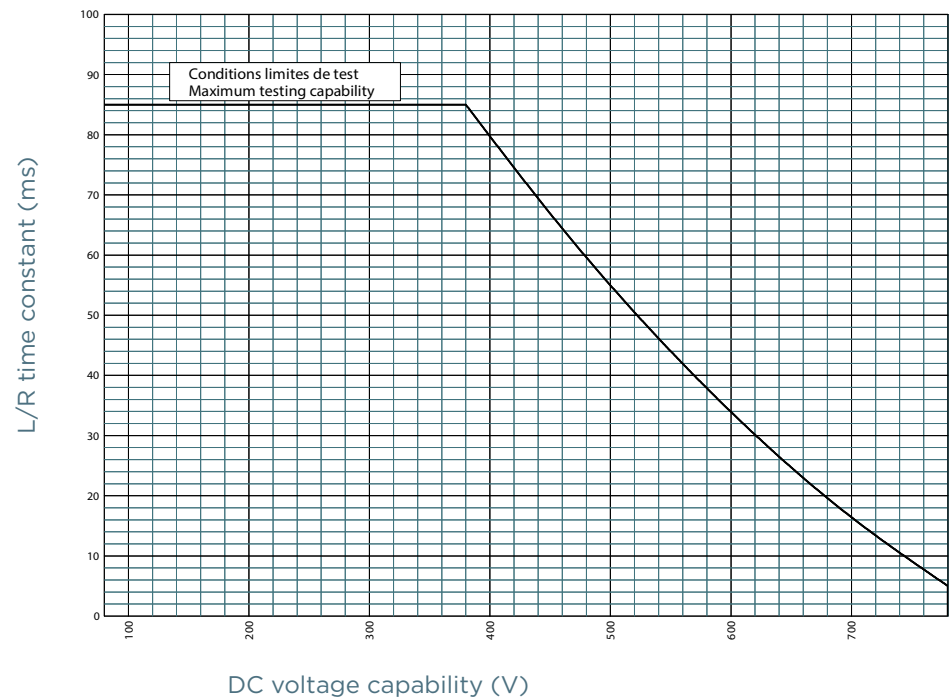

## POWER DISSIPATION

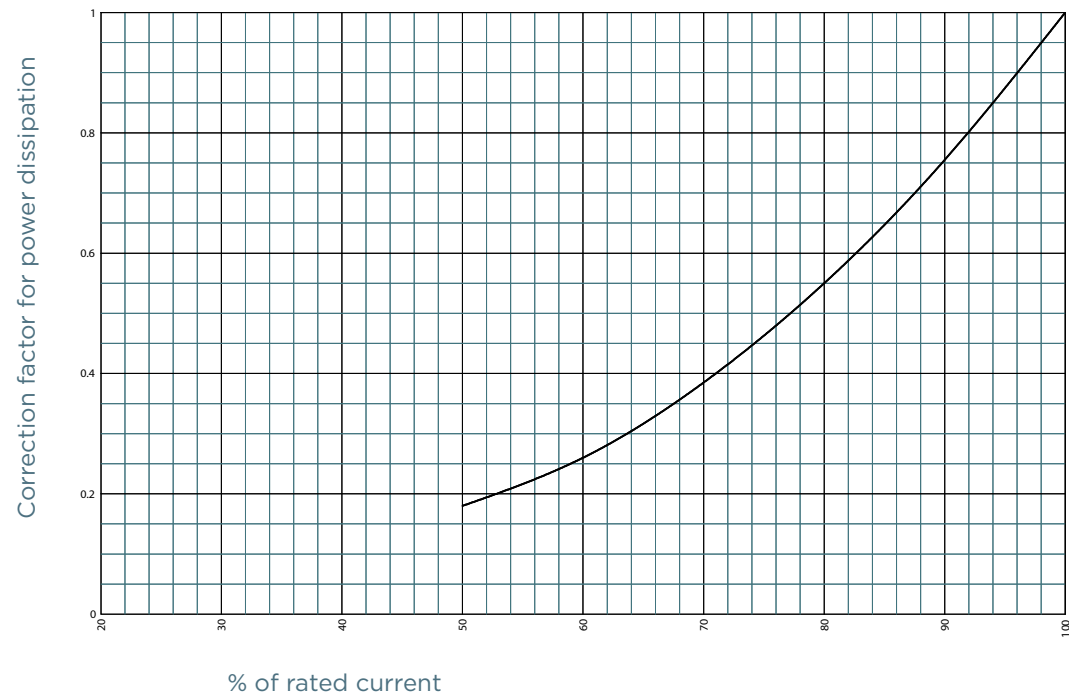


# Protistor® size 27x60 gR (gRB)

800VAC (IEC)

## PEAK ARC VOLTAGE

### CP 27x60 gRB 800VAC

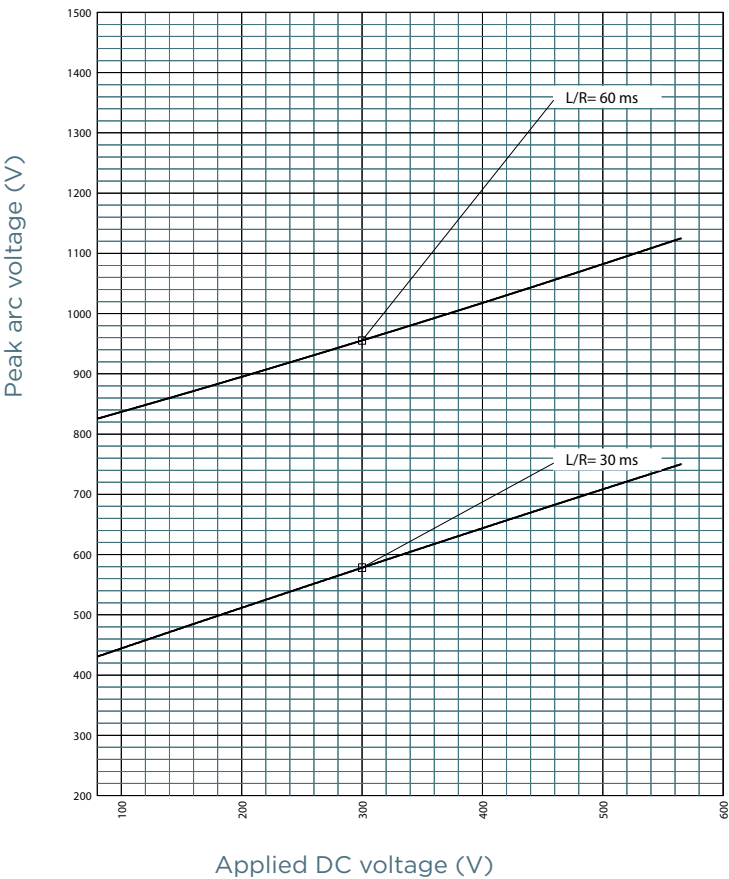





# Protistor® size 27x60 gR (gRB)

800VAC (IEC)

## DIMENSIONS

### CP 27x60 gRB 800VAC

7 Course du percuteur  
striker stroke

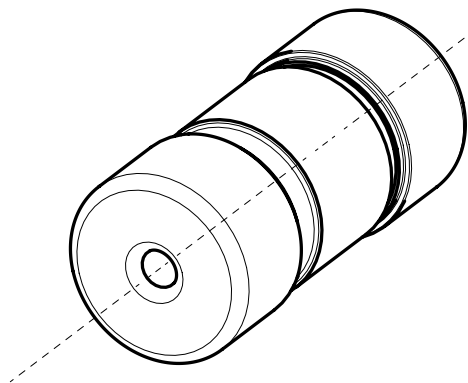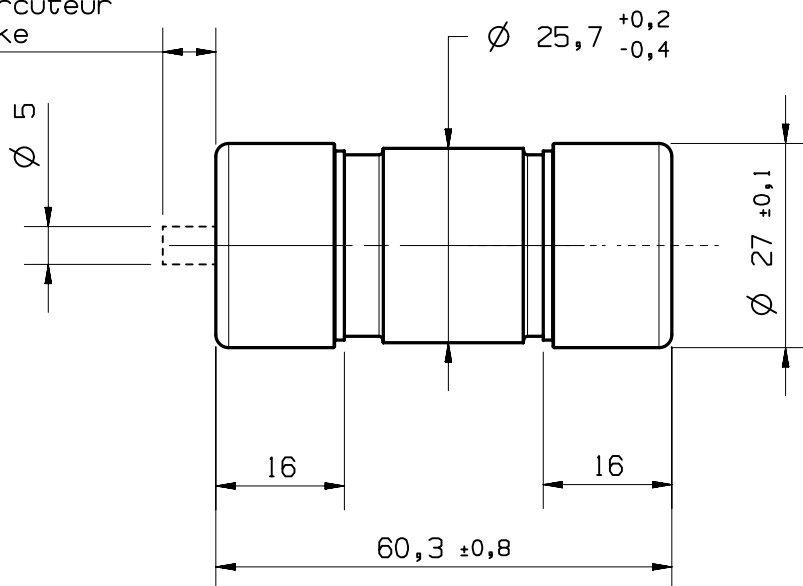

Dimensions in mm