

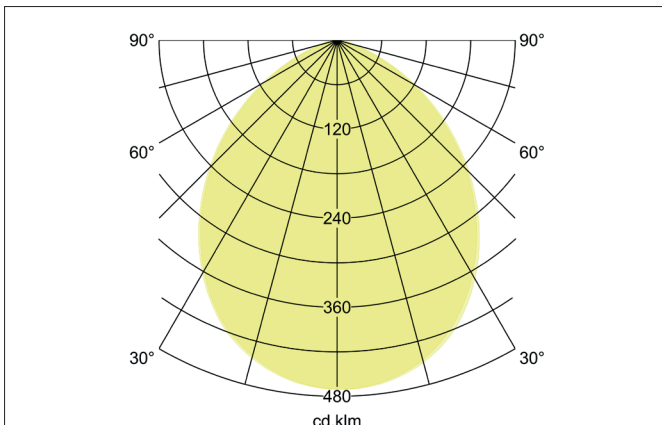


**ZULO MICRO LED recessed downlight, IP54**  
Article no. 32026073

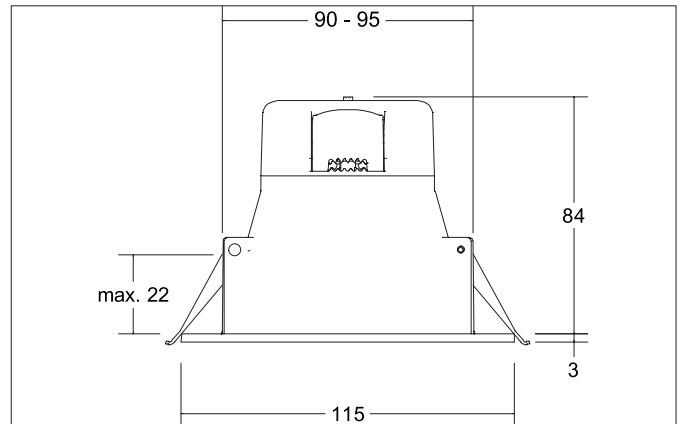

**Tender**

LED recessed downlight, IP54, Round. Ceiling cut-out Ø 95 mm, Installation depth 84 mm, Outer diameter 115 mm, Weight 0,156 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover polycarbonat opalLuminous flux 700 - 840 lm, Power 1 x 10 W, Light colour warm white to daylight white, Correlated color temprature (CCT) 3.000 - 5.700 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 54.000 h, Housing material: Plastic, Colour: white matt, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP54, shock resistance according to IEC62262: IK03 .With electronic driver, on/off switchable.

**Product Benefits**

- Round recessed downlight made of plastic with opal plastic cover.
- Simple and toolless mounting due to the use of a plug-in terminal, which is also suitable for through-wiring.
- CRI > 80.
- Low mounting depth of 84 mm, diameter of 115 mm, Ceiling cut-out 90 mm.
- Protection class IP54 on the room side.
- Usable up to a maximum ceiling thickness of 22 mm.


**ZULO MICRO LED recessed downlight, IP54**

Article no. 32026073

Article data	
Article no.	32026073
GTIN	425 1433926047
Series name	ZULO MICRO
Short description	LED recessed downlight, IP54
Material	Plastic
Colour	white matt
Type of surface	Matt
Shape	Round
Outer diameter	115 mm
Built-in diameter min.	90 mm
Built-in diameter max.	95 mm
Installation depth	84 mm
Height	3 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, on/off switchable
Weight	0.156 kg
D licence plate	No
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K / 4.000 K / 5.700 K
Color Temperature 1	3,000 K
Color Temperature 2	4,000 K
Color Temperature 3	5,700 K
Light output	Direct
Luminous flux	700 - 840 lm
Luminous flux 1	700 lm
Luminous flux 2	890 lm
Luminous flux 3	840 lm
System efficiency	84 lm/W
Colour rendering	CRI > 80
Reflector	Without
Beam angle	90°
Light sharing	Symmetric
Adjustable color temperature	Stages

Operating technology of the luminaire	
System output	10 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	II
Protection class on the ceiling side	IP40
Degree of protection	IP54
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	54,000 h
Energy efficiency class	not required


**ZULO MICRO LED recessed downlight, IP54**

Article no. 32026073

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Max. ceiling thickness	22 mm
Impact resistance	IK03
Further references	No cover with thermal insulation material
Material cover	Polycarbonat opal
Suitable for through-wiring	Yes

Packing data	
Gross weight	0.24 kg
Length of packaging	125 mm
Packaging width	125 mm
Packaging height	95 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>