




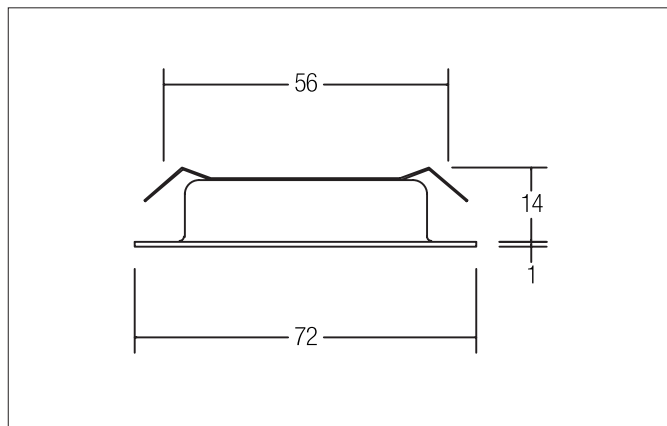

BB17 LED recessed downlight set, on/off switchable

Article no. 38370073

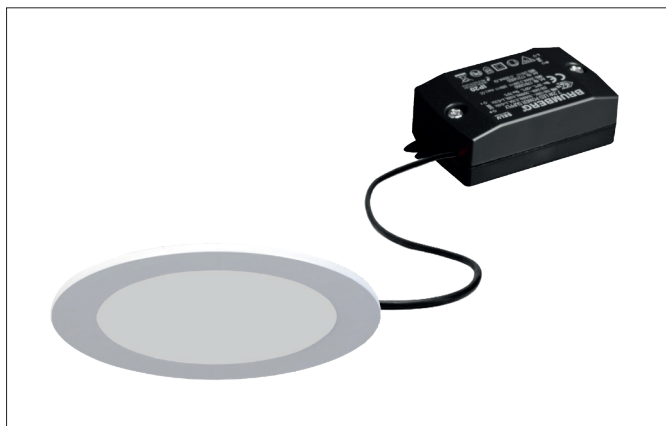

Tender

LED recessed downlight set, on/off switchable, Round. Toolless ceiling installation by leaf spring. Ceiling cut-out Ø 56 mm, Installation depth 14 mm, Outer diameter 72 mm, Weight 0,084 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, opal Luminous flux 260 lm, Power 1 x 3 W, System Efficiency 87 lm/W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L80/B20 at 25 °C: 30.000 h, Housing material: Steel / Plastic, Colour: white matt, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20. With electronic driver, on/off switchable.


BB17 LED recessed downlight set, on/off switchable

Article no. 38370073

| Article data | |
|------------------------|--|
| Article no. | 38370073 |
| GTIN | 4251433917113 |
| Series name | BB17 |
| Short description | LED recessed downlight set, on/off switchable |
| Material | Steel / Plastic |
| Colour | white matt |
| Type of surface | Matt |
| Shape | Round |
| Outer diameter | 72 mm |
| Built-in diameter min. | 56 mm |
| Built-in diameter max. | 56 mm |
| Installation depth | 14 mm |
| Hight | 1 mm |
| Scope of delivery | Incl. 900 mm connecting cable between the converter and the lamp |
| Weight | 0.084 kg |
| D licence plate | No |
| Conformance | CE, UKCA |

| Lighting technology | |
|------------------------------|------------|
| Colour temperature | 3.000 K |
| Light colour | white |
| Light output | Direct |
| Luminous flux | 260 lm |
| System efficiency | 87 lm/W |
| Colour rendering | CRI > 80 |
| Reflector | High-gloss |
| Beam angle | 100° |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--------------------|
| Outer diameter | 72 mm |
| Power | 3 W |
| Voltage type | DC |
| Current | 350 mA |
| Lamp | LED not changeable |
| Protection class | III |
| Degree of protection | IP20 |

| Operating technology of driver | |
|--------------------------------|-------------|
| Article No. of used driver | 17662010 |
| Width | 35 mm |
| Hight | 21 mm |
| AC nominal voltage min | 90 V |
| AC nominal voltage max | 264 V |
| Frequency max | 63 Hz |
| Dimmable | No |
| Control | on/off |
| Starting current | 40 A, 50 μs |
| Power | 1 W |
| Power | 7.2 W |
| Output current | 350 mA |
| Degree of protection | IP20 |
| Protection class | II |
| Flicker-free | Yes |


BB17 LED recessed downlight set, on/off switchable

Article no. 38370073

| Mounting technology | |
|-----------------------|---|
| Mounting method | Recessed mounting |
| Place of installation | Ceiling-mounted |
| Adjustability | Not adjustable |
| Further references | No cover with thermal insulation material |
| Cover | Plastic, opal |

| Packing data | |
|-------------------------|--|
| Gross weight | 0.108 kg |
| Length of packaging | 85 mm |
| Packaging width | 43 mm |
| Packaging height | 84 mm |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |

| Optional accessories | |
|---|--|
| Article no.: 83330000 | |
| Connection box 230 V AC, 3-pole | |
| Dimensions: 85 mm x 35 mm x 30 mm | |
| https://www.brumberg.com/fileadmin/products/Datenblatt_83330000_2021_DE.pdf | |