



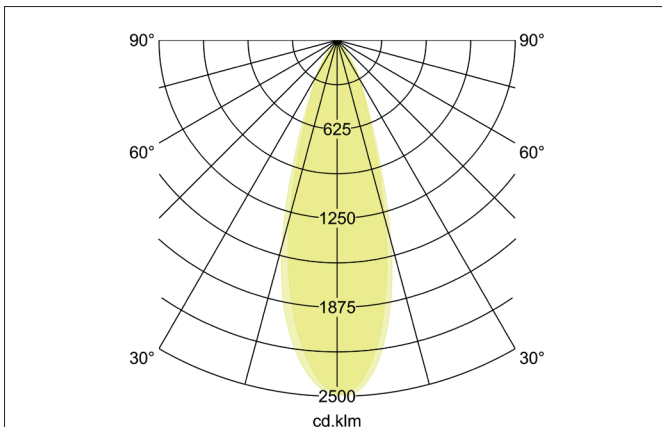

BLOKK LED ceiling surface-mounted luminaire, IP65
 Article no. 60115103

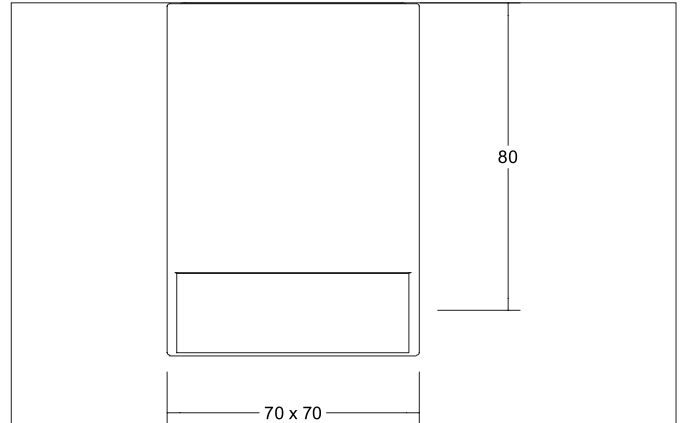

Tender
 LED ceiling surface-mounted luminaire, IP65. Luminaire length 70.0 mm, Luminaire width 70.0 mm, Hight 80.0 mm Weight 0.575 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover glass transparent. Luminous flux 635 lm, Power 1 x 9 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Glass, Colour: graphite structure, Permissible ambient temperature (ta): -20 to +45°C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65. For connection to an external driver, which is not included in the scope of delivery of the luminaire. on/off switchable.

| Article data | |
|-------------------|-----------------------------------------------------------|
| Article no. | 60115103 |
| GTIN | 4251433925552 |
| Series name | BLOKK |
| Short description | LED ceiling surface-mounted luminaire, IP65 |
| Material | Aluminium / Glass |
| Colour | graphite structure |
| Type of surface | Structure |
| Shape | Square |
| Length | 70 mm |
| Width | 70 mm |
| Hight | 80 mm |
| Scope of delivery | Incl. converter for connection to the 230-V mains voltage |
| Weight | 0.575 kg |
| Conformance | CE, UKCA |


BLOKK LED ceiling surface-mounted luminaire, IP65

Article no. 60115103

| Lighting technology | |
|------------------------------|---------------|
| Colour temperature | 3.000 K |
| Light colour | white |
| Light output | Direct |
| Luminous flux | 635 lm |
| System efficiency | 64 lm/W |
| McAdam-Step | McAdam-Step 3 |
| Colour rendering | CRI > 80 |
| Beam angle | 34° |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output | 10 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequency max | 50 Hz |
| Frequency min | 50 Hz |
| Lamp | LED |
| Lamp holder | Without fitting |
| Protection class | I |
| Degree of protection | IP65 |
| Ambient temperature | -20 to +45°C |
| Dimmable | No |
| Control | on/off |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Energy efficiency class | not required |

| Mounting technology | |
|-----------------------------|-------------------|
| Mounting method | Surface mounting |
| Place of installation | Ceiling-mounted |
| Adjustability | Not adjustable |
| Further references | Outdoor |
| Material cover | Glass transparent |
| Suitable for through-wiring | No |

| Packing data | |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight | 0.625 kg |
| Length of packaging | 80 mm |
| Packaging width | 80 mm |
| Packaging height | 105 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |