




LED power supply unit 12 V DC, 1-10 V dimmable (analog)

Article no. 3506

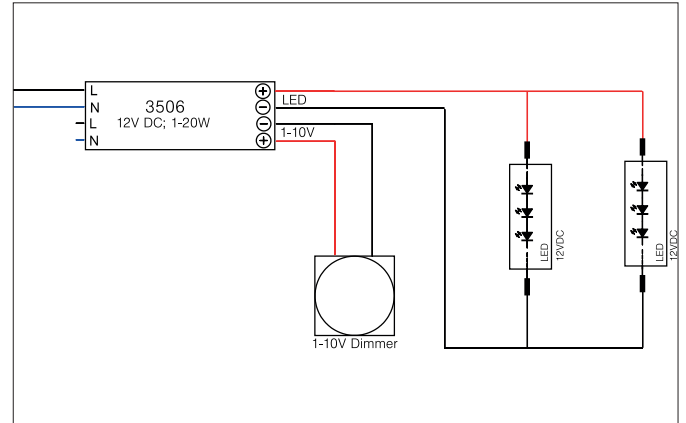

Tender

LED power supply unit 12 V DC, 1-10 V dimmable (analog), white, Rectangular. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: AC: 220-240 V, DC: 176-280 V, Power: 20 W, Dimmable: Yes, Type of dimming: 1-10 V.

Article data	
Article no.	3506
GTIN	4250047703563
Short description	LED power supply unit 12 V DC, 1-10 V dimmable (analog)
Material	Plastic
Colour	white
Shape	Rectangular
Length	146 mm
Width	55 mm
Height	19 mm
Weight	0.14 kg
stamp	ENEC 05, EL
Conformance	CE


LED power supply unit 12 V DC, 1-10 V dimmable (analog)

Article no. 3506

Operating technology of driver	
AC nominal voltage min	90 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
DC nominal voltage min	176 V
DC nominal voltage max	280 V
Protection class	II
Degree of protection	IP20
Power	0 W
Power max.	20 W
Output_ripple_current	3
Starting current	27 A, 250 µs
Suitable for emergency lighting	No
measure point (tc)	80 °C
Power factor	0.55
max. no. lights on B16 A	27
Output voltage max	12.00 V
Output voltage min.	12.00 V
Flicker value Pst LM	1.00
Control	1-10 V
Connection type-primary	Screw-in connection
Connection type-secondary	Screwed terminal
Number of poles	4
Environment temperature (ta)	-25 °C up to +50 °C
Measure point (tc)	max. +80 °C
Output current	2,08 mA

Packing data	
Gross weight	0.159 kg
Length of packaging	60 mm
Packaging width	27 mm
Packaging height	150 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>