BRUMBERG
Light. Since 1873.

LED converter 350 mA, on/off switchable

Article no. 17621020

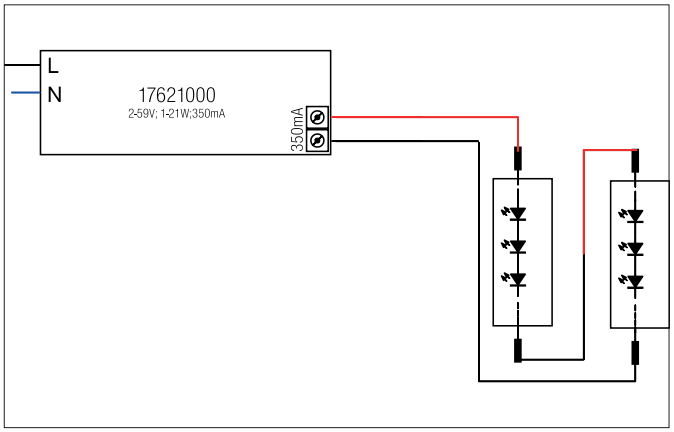

IP20 230V

Tender
LED converter 350 mA, on/off switchable, white, Rectangular. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 21 W, Dimmable: No, Type of dimming: on/off.

Article data	
Article no.	17621020
GTIN	4251433918516
Short description	LED converter 350 mA, on/off switchable
Material	Plastic
Colour	white
Shape	Rectangular
Length	128 mm
Width	50 mm
Hight	13 mm
Scope of delivery	Plug&Play-Ausgangsleitung, Länge 110 mm und Anschlussbox
Weight	0.117 kg
stamp	ENEC 17
Conformance	CE

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors.
Date 11.02.2026 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

BRUMBERG
Light. Since 1873.

LED converter 350 mA, on/off switchable

Article no. 17621020

Operating technology of the luminaire	
Voltage type	AC
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Current	350 mA
Frequency max	63 Hz
Frequency min	47 Hz
Protection class	II
Degree of protection	IP20
Ambient temperature	-20°C up to +45°C
Dimmable	No
Control	on/off
max. no. lights on B16 A	18
max. no. lights on C10 A	24
max. no. lights on C16 A	39

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
Protection class	II
Degree of protection	IP20
Power	1 W
Power max.	21 W
Output_ripple_current	50
Starting current	8 A, 500 ms
Suitable for emergency lighting	No
measure point (tc)	110 °C
Version	Plug&Play + connection box
Power factor	0.55
max. no. lights on B10 A	11
max. no. lights on B16 A	18
max. no. lights on C16 A	39
max. no. lights on C10 A	24
Output voltage max	59.00 V
Output voltage min.	2.00 V
Control	on/off
Number of poles	2
Flicker-free	Yes
Enviroment temprature (ta)	-20 °C up to +45 °C
Measure point (tc)	max. +85 °C
Average nominal lifespan	30000 h
Output current	350 mA

Mounting technology	
Application	Indoor
Suitable for through-wiring	No

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors.
Date 11.02.2026 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

BRUMBERG
Light. Since 1873.

LED converter 350 mA, on/off switchable
Article no. 17621020

Packing data	
Gross weight	0.176 kg
Length of packaging	100 mm
Packaging width	100 mm
Packaging hight	100 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors.
Date 11.02.2026 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/