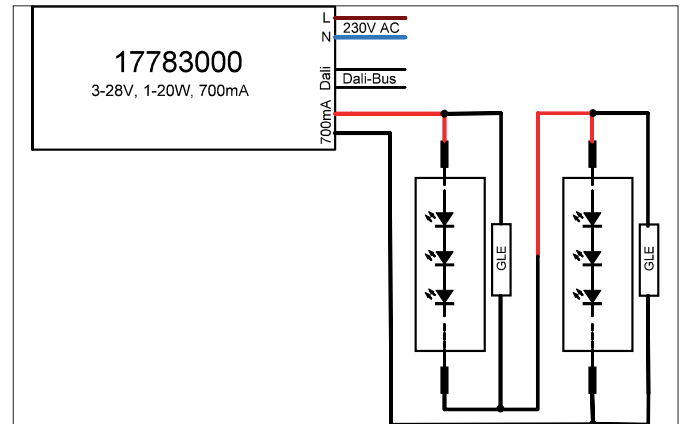



LED converter 700 mA, DALI dimmable, (digital)
 Article no. 17783020

Tender

LED converter 700 mA, DALI dimmable, (digital), white, Rectangular. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz , Power: 20 W, Dimmable: Yes, Type of dimming: DALI-2.

Article data	
Article no.	17783020
GTIN	4251433924166
Short description	LED converter 700 mA, DALI dimmable, (digital)
Material	Plastic
Colour	white
Shape	Rectangular
Length	110.5 mm
Width	52 mm
Height	22 mm
Scope of delivery	Plug&Play-Ausgangsleitung, Länge 110 mm und Anschlussbox
Weight	0.176 kg
stamp	ENEC 05, EL
Conformance	CE, UKCA


LED converter 700 mA, DALI dimmable, (digital)

Article no. 17783020

Operating technology of driver	
AC nominal voltage min	99 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
DC nominal voltage min	176 V
DC nominal voltage max	280 V
Protection class	II
Degree of protection	IP20
Power	2.1 W
Power max.	20 W
Output_ripple_current	3
Starting current	5 A, 50 µs
Suitable for emergency lighting	No
measure point (tc)	75 °C
Version	Plug&Play + connection box
Power factor	0.95
Output voltage max	28.00 V
Output voltage min.	3.00 V
Control	DALI-2
Number of poles	4
Environment temperature (ta)	-25 °C up to +45 °C
Measure point (tc)	max. +75 °C
Output current	700 mA
Safety devices against thermal overload	yes

Packing data	
Gross weight	0.23 kg
Length of packaging	90 mm
Packaging width	55 mm
Packaging height	109 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>