




LED converter 350mA, Casambi dimmable

Article no. 17672020

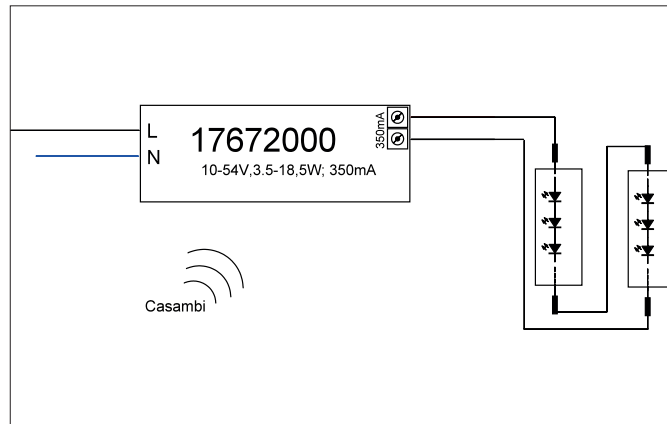

Tender
LED converter 350mA, Casambi dimmable, white, Rectangular. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 18,5 W, Dimmable: Yes, Type of dimming: Casambi-Push.

Article data	
Article no.	17672020
GTIN	4251433926702
Short description	LED converter 350mA, Casambi dimmable
Material	Plastic
Colour	white
Shape	Rectangular
Length	146.5 mm
Width	44 mm
Hight	30 mm
Scope of delivery	Plug&Play-Ausgangsleitung, Länge 110 mm mit Anschlussbox
Weight	0.17 kg
stamp	ENEC 05, EL
Conformance	CE


LED converter 350mA, Casambi dimmable

Article no. 17672020

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
DC nominal voltage min	176 V
DC nominal voltage max	275 V
Protection class	II
Degree of protection	IP20
Power	3.5 W
Power max.	18.5 W
Output_ripple_current	3
Starting current	5 A, 50µs
Suitable for emergency lighting	No
measure point (tc)	85 °C
Version	Plug&Play + connection box
Power factor	0.95
max. no. lights on B16 A	50
Output voltage max	54.00 V
Output voltage min.	10.00 V
Flicker value Pst LM	1.00
Control	Casambi-Push
Number of poles	2
Environment temperature (ta)	-25 °C up to +45 °C
Measure point (tc)	max. +85 °C
Average nominal lifespan	40000 h
Output current	350 mA

Packing data	
Gross weight	0.198 kg
Length of packaging	90 mm
Packaging width	55 mm
Packaging height	109 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>