


Style II 22021 LED CG-S

Safety and Exit Sign Luminaires with the same design




4

22021 LED CG-S with cover PR



Dimensions in mm

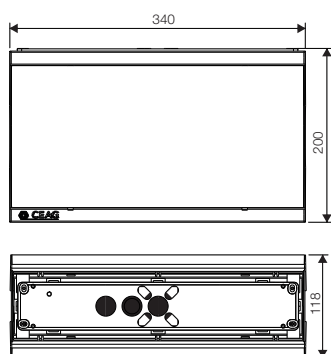

Style II 22021 LED CG-S

- Double-sided exit sign luminaire from high quality, UV-resistant, halogen-free plastic with LED-technology
- Modular constructed luminaire series permits combination with various fixing modules
- Large selection of screenprinted pictogram covers with simple snap mounting
- Exit signs with high luminance of > 500 cd/m² (white area) and good uniformity, in accordance with standards (silk-screened pictograms)
- Minimum service requirement due to high service life of the LEDs (up to 50,000 hours)
- Simple mounting via quick mounting set (can be pre-assembled) with plug-in connectors for through-wiring
- Optionally available IP54 set (for electronic and light source) for increased sealing requirements for indoor rooms or for canopied outdoor areas
- Shortened inspection effort due to CEWA GUARD technology
- Automatic function monitoring of up to 20 luminaires per circuit
- Reduced installation expenditures by STAR technology
- Freely programmable mixed operation of the switching modes per luminaire in one circuit

Viewing distance	32 m
Luminous flux Φ_E/Φ_N at the end of rated operating time	100 %
Housing material	Polycarbonate
Housing colour	Light grey RAL 7035
Weight	1.14 kg
Type of mounting	Wall or ceiling mounting
Connection terminals	2 x 3 x 2.5 mm ²
Connection voltage	220 – 240 V AC, 50/60 Hz 176 – 275 V DC
Power consumption mains operation (apparent power / effective power)	9.5 VA / 5.8 W
Inrush current	1.5 A
Permissible temperature range	-20 °C to +40 °C
Current consumption - battery operation (220 V)	25 mA
Light source	4 x 1.1 W LED

Ordering details

Type	Scope of supply	Order No.
Style II 22021 LED CG-S	Luminaire housing IP41, including LED-supply with CG-S technology and LED-circuit board 4 x 1 W, for exit signage, without cover, without quick mounting set	40071356812
Cover PL acc. to ISO 7010	Cover with silkscreened pictogram	40071354130
Cover PR acc. to ISO 7010	Cover with silkscreened pictogram	40071354131
Cover PU acc. to ISO 7010	Cover with silkscreened pictogram	40071354132
Cover SL	Transparent cover	40071345985
Quick-mounting set	With terminals and optional distance plates	40071356826
IP54 set*	Incl. quick-mounting set and mounting accessories	40071356825

Start of phase-out in 2022

*) IP54 for electronic and lamp. For increased tightness requirements indoors or in canopied outdoor areas.

**) In combination with IP54 set: limited surface temperature acc. to DIN EN 60598-2-24