


# Style II 51021 LED CG-S

Safety and Exit Sign Luminaires with the same design



4

51021 LED CG-S with pictogram foil PR




## Style II 51021 LED CG-S


- Compact exit sign or safety luminaire from high quality, UV-resistant, halogen-free plastic with LED-technology
- Modular constructed luminaire series permits combination with various fixing modules
- Includes opaque cap with simple snap mounting and pictogram foil set
- Exit signs with high luminance of > 500 cd/m<sup>2</sup> (white area) and good uniformity, in accordance with standards
- Minimum service requirement due to high service life of the LEDs (up to 50,000 hours)
- Simple mounting via quick mounting set (can be pre-assembled) with plug-in connectors for through-wiring
- Optionally available IP54 set (for electronic and light source) for increased sealing requirements both indoor and in protected outdoor areas
- Shortened inspection effort due to CEWA GUARD technology
- Automatic function monitoring of up to 20 luminaires per circuit
- Reduced installation expenditures by STAR technology
- Freely programmable mixed operation of the switching modes per luminaire in one circuit

Viewing distance	17 m
Luminous flux $\Phi_E/\Phi_N$ at the end of rated operating time	100 %
Housing material	Polycarbonate
Housing colour	Light grey RAL 7035
Weight	0.75 kg
Type of mounting	Wall or ceiling mounting
Connection terminals	2 x 3 x 2.5 mm <sup>2</sup>
Connection voltage	220 – 240 V AC, 50/60 Hz 176 – 275 V DC
Power consumption mains operation (apparent power / effective power)	9.5 VA / 5.8 W
Permissible temperature range	-20 °C to +40 °C
Inrush current	1.5 A
Current consumption - battery operation (220 V)	25 mA
Light source	4 x 1.1 W LED

## Ordering details

Type	Scope of supply	Order No.
Set: Style II 51021 LED CG-S	Luminaire housing, including LED-supply with CG-S technology and LED-circuit board 4 x 1 W, with opaque cap and pictogram set (arrow left, right, down), without quick mounting set 	40071356814
Quick-mounting set	With terminals and optional distance plates	40071356826
IP54 set*	Incl. quick-mounting set and mounting accessories	40071356825

## Start of phase-out in 2022

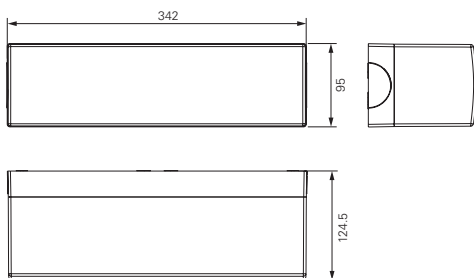

Dimensions in mm

\*) IP54 for electronic and lamp. For increased tightness requirements indoors or in canopied outdoor areas.

\*\*\*) In combination with IP54 set: limited surface temperature acc. to DIN EN 60598-2-24