

## Han hinged frame plus, for 3 modules A-C

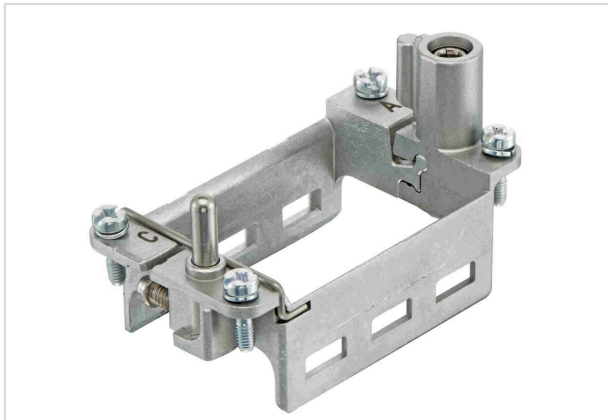


Image is for illustration purposes only. Please refer to product description.

|                    |                                                                               |
|--------------------|-------------------------------------------------------------------------------|
| Part number        | 09 14 010 0361                                                                |
| Specification      | Han hinged frame plus, for 3 modules A-C                                      |
| HARTING eCatalogue | <a href="https://harting.com/09140100361">https://harting.com/09140100361</a> |

### Identification

|                              |                          |
|------------------------------|--------------------------|
| Category                     | Accessories              |
| Series                       | Han-Modular®             |
| Type of accessory            | Hinged frame plus        |
| Description of the accessory | for 3 modules<br>A ... C |

### Version

|      |      |
|------|------|
| Size | 10 B |
|------|------|

### Technical characteristics

|                          |                                                                                                                                |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Conductor cross-section  | 1 ... 10 mm <sup>2</sup> PE (power side)                                                                                       |
|                          | 0.5 ... 2.5 mm <sup>2</sup> PE (signal side)                                                                                   |
|                          | The use of ferrules is recommended, conductor cross-section 10 mm <sup>2</sup> only with ferrule crimping tool 09 99 000 0374. |
| Stripping length         | 8 ... 10 mm                                                                                                                    |
| Tightening torque        | 0.8 Nm PE screw M3                                                                                                             |
|                          | 1.2 Nm PE screw M4                                                                                                             |
| Recommended screw driver | Slotted 0.6 x 3.5<br>PH2                                                                                                       |
| Limiting temperature     | -40 ... +125 °C                                                                                                                |
| Mating cycles            | ≥500                                                                                                                           |

### Material properties

|          |                          |
|----------|--------------------------|
| Material | Zinc die-cast            |
|          | Stainless steel          |
| RoHS     | compliant with exemption |



**Pushing Performance**  
Since 1945

## Material properties

|                                      |                                                        |
|--------------------------------------|--------------------------------------------------------|
| RoHS exemptions                      | 6(c): Copper alloy containing up to 4 % lead by weight |
| ELV status                           | compliant with exemption                               |
| China RoHS                           | 50                                                     |
| REACH Annex XVII substances          | Not contained                                          |
| REACH ANNEX XIV substances           | Not contained                                          |
| REACH SVHC substances                | Yes                                                    |
| REACH SVHC substances                | Lead                                                   |
| ECHA SCIP number                     | 564b7d75-7bf6-4cfb-acb1-2168eb61b675                   |
| California Proposition 65 substances | Yes                                                    |
| California Proposition 65 substances | Lead                                                   |

## Specifications and approvals

|                |                       |
|----------------|-----------------------|
| Specifications | IEC 60664-1           |
|                | IEC 61984             |
|                | IEC 61373 Category 2  |
| UL / CSA       | UL 1977 ECBT2.E235076 |
| Approvals      | DNV GL                |

## Commercial data

|                                |                                                         |
|--------------------------------|---------------------------------------------------------|
| Packaging size                 | 1                                                       |
| Net weight                     | 35 g                                                    |
| Country of origin              | Germany                                                 |
| European customs tariff number | 85389099                                                |
| GTIN                           | 5713140161955                                           |
| eCl@ss                         | 27440206 Module carrier frame for industrial connectors |
| ETIM                           | EC002312                                                |
| UNSPSC 24.0                    | 39121421                                                |