

# Han 3HvE-M-s

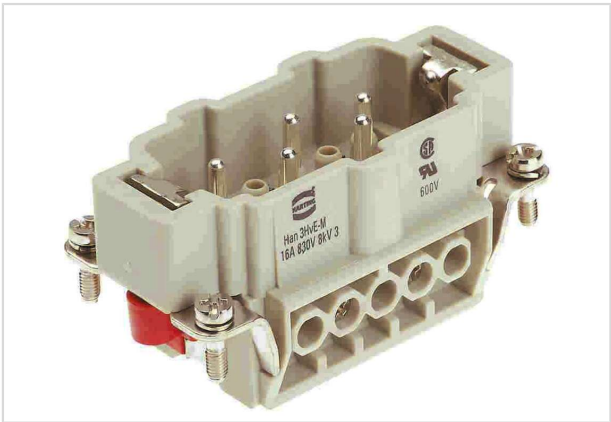


Image is for illustration purposes only. Please refer to product description.

|                    |                                                                               |
|--------------------|-------------------------------------------------------------------------------|
| Part number        | 09 34 003 2601                                                                |
| Specification      | Han 3HvE-M-s                                                                  |
| HARTING eCatalogue | <a href="https://harting.com/09340032601">https://harting.com/09340032601</a> |

## Identification

|          |           |
|----------|-----------|
| Category | Inserts   |
| Series   | Han Hv E® |

## Version

|                            |                   |
|----------------------------|-------------------|
| Termination method         | Screw termination |
| Gender                     | Male              |
| Size                       | 10 B              |
| With wire protection       | Yes               |
| Number of contacts         | 5                 |
| Number of power contacts   | 3                 |
| Number of special contacts | 2x Relay contact  |
| PE contact                 | Yes               |

## Technical characteristics

|                               |                     |
|-------------------------------|---------------------|
| Conductor cross-section       | 0.75 ... 2.5 mm²    |
| Conductor cross-section [AWG] | AWG 18 ... AWG 14   |
| Rated current                 | 16 A                |
| Rated voltage                 | 830 V               |
| Rated impulse voltage         | 8 kV                |
| Pollution degree              | 3                   |
| Rated voltage acc. to UL      | 600 V               |
| Rated voltage acc. to CSA     | 600 V               |
| Insulation resistance         | >10 <sup>10</sup> Ω |



**Pushing Performance**  
Since 1945

## Technical characteristics

|                          |                                                                          |
|--------------------------|--------------------------------------------------------------------------|
| Contact resistance       | ≤1 mΩ                                                                    |
| Stripping length         | 7.5 mm                                                                   |
| Tightening torque        | 0.5 Nm Contact screw M3<br>0.5 Nm Fixing screws M3<br>1.2 Nm PE screw M4 |
| Recommended screw driver | Slotted 0.6 x 3.5<br>Slotted 0.8 x 4.5<br>PH1<br>PH2                     |
| Limiting temperature     | -40 ... +125 °C                                                          |
| Mating cycles            | ≥500                                                                     |

## Material properties

|                                           |                                                                   |
|-------------------------------------------|-------------------------------------------------------------------|
| Material (insert)                         | Polycarbonate (PC)                                                |
| Colour (insert)                           | RAL 7032 (pebble grey)                                            |
| Material (contacts)                       | Copper alloy                                                      |
| Surface (contacts)                        | Silver plated                                                     |
| Material flammability class acc. to UL 94 | V-0                                                               |
| RoHS                                      | compliant with exemption                                          |
| RoHS exemptions                           | 6(c): Copper alloy containing up to 4 % lead by weight            |
| ELV status                                | compliant with exemption                                          |
| China RoHS                                | 50                                                                |
| REACH Annex XVII substances               | Not contained                                                     |
| REACH ANNEX XIV substances                | Not contained                                                     |
| REACH SVHC substances                     | Yes                                                               |
| REACH SVHC substances                     | Potassium 1,1,2,2,3,3,4,4,4-nonafluorobutane-1-sulphonate<br>Lead |
| ECHA SCIP number                          | 5dbb3851-b94e-4e88-97a1-571845975242                              |
| California Proposition 65 substances      | Yes                                                               |
| California Proposition 65 substances      | Lead<br>Nickel                                                    |
| Fire protection on railway vehicles       | EN 45545-2 (2020-08) + A1 (2023-10)                               |
| Requirement set with Hazard Levels        | R22 (HL 1-3)<br>R23 (HL 1-3)                                      |



**Pushing Performance**  
Since 1945

## Specifications and approvals

|                |                       |
|----------------|-----------------------|
| Specifications | IEC 60664-1           |
|                | IEC 61984             |
| UL / CSA       | UL 1977 ECBT2.E235076 |

## Commercial data

|                                |                                                   |
|--------------------------------|---------------------------------------------------|
| Packaging size                 | 1                                                 |
| Net weight                     | 51.86 g                                           |
| Country of origin              | Romania                                           |
| European customs tariff number | 85366990                                          |
| GTIN                           | 5713140052963                                     |
| eCl@ss                         | 27440205 Contact insert for industrial connectors |
| ETIM                           | EC000438                                          |
| UNSPSC 24.0                    | 39121522                                          |