



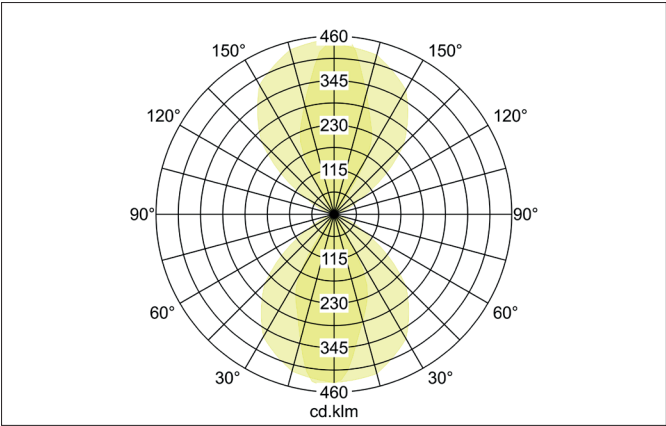

ILICIS LED surface-mounted wall light, IP54, switchable
Article no. 10013103

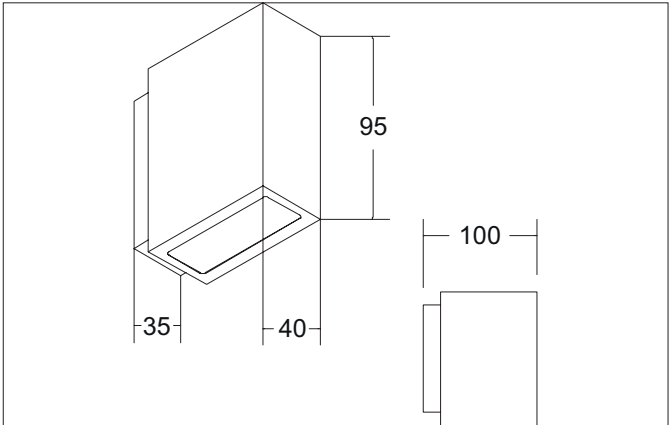

Tender
LED surface-mounted wall light, IP54, switchable, Rectangular. Luminaire length 100.0 mm, Luminaire width 40.0 mm, Height 95.0 mm
Weight 0.66 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover glass transparent Luminous flux 450 lm, Power 2 x 3 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Glass, Colour: graphite structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP54. With electronic driver, on/off switchable.

Article data	
Article no.	10013103
GTIN	4250047794929
Series name	ILICIS
Short description	LED surface-mounted wall light, IP54, switchable
Material	Aluminium / Glass
Colour	graphite structure
Type of surface	Matt
Shape	Rectangular
Length	100 mm
Width	40 mm
Hight	95 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage
Weight	0.66 kg
D licence plate	No
Conformance	CE, UKCA


ILICIS LED surface-mounted wall light, IP54, switchable

Article no. 10013103

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct/Indirect
Luminous flux	450 lm
System efficiency	75 lm/W
Colour rendering	CRI > 80
Reflector	High-gloss
Beam angle	60°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	6 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP54
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Energy efficiency class	not required

Mounting technology	
Mounting method	Surface mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Cover	Glass transparent
Suitable for through-wiring	No

Packing data	
Gross weight	0.71 kg
Length of packaging	110 mm
Packaging width	110 mm
Packaging height	80 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.