




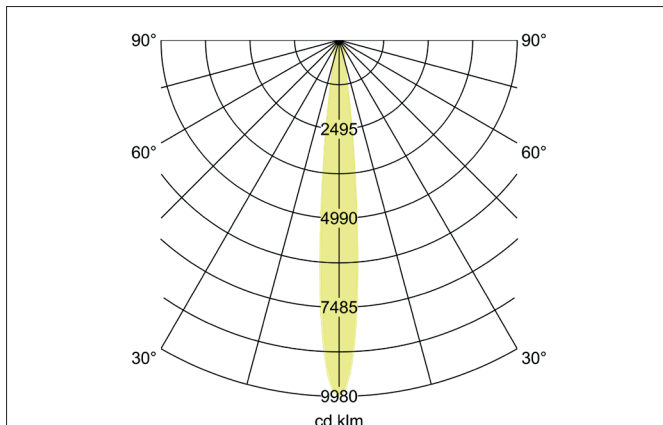

BRUMBERG
Light. Since 1873.

CUBA LED wall surface mounted spot, rotatable and pivoted

Article no. 10122173

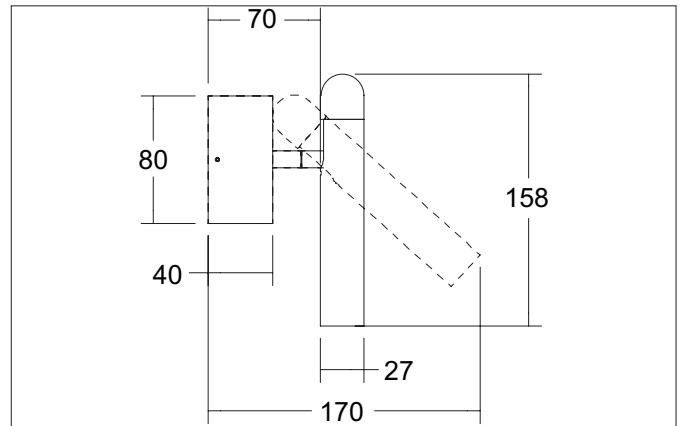

Tender

LED wall surface mounted spot, rotatable and pivoted, Round., Weight 0.362 kg, Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. Luminous flux 220 lm, Power 1 x 4,2 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 90, Housing material: Aluminium, Colour: white structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, on/off switchable.

Article data	
Article no.	10122173
GTIN	4251433932413
Series name	CUBA
Short description	LED wall surface mounted spot, rotatable and pivoted
Material	Aluminium
Colour	white structure
Type of surface	Structure
Shape	Round
Scope of delivery	Incl. converter for connection to the 230-V mains voltage, on/off switchable
Weight	0.362 kg
D licence plate	No
Conformance	CE, UKCA


CUBA LED wall surface mounted spot, rotatable and pivoted

Article no. 10122173

Lighting technology	
Colour temperature	3.000 K
Light output	Direct
Luminous flux	220 lm
System efficiency	52 lm/W
Colour rendering	CRI > 90
Reflector	High-gloss
Reflector colour	silver
Beam angle	38°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	4.2 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP20
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Energy efficiency class	not required

Mounting technology	
Mounting method	Surface mounting
Place of installation	Wall-mounted
Adjustability	Rotatable and adjustable head
Swivel angle	40°
Rotation angle	355°
Head adjustable angle	40°
Cover	Without cover
Suitable for through-wiring	Yes

Packing data	
Gross weight	0.506 kg
Length of packaging	225 mm
Packaging width	135 mm
Packaging height	100 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.