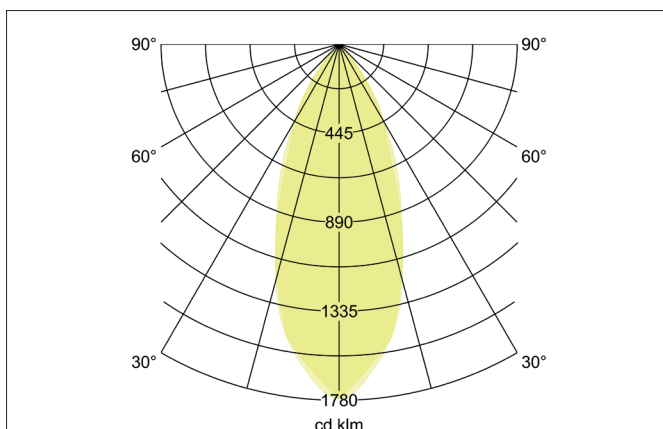
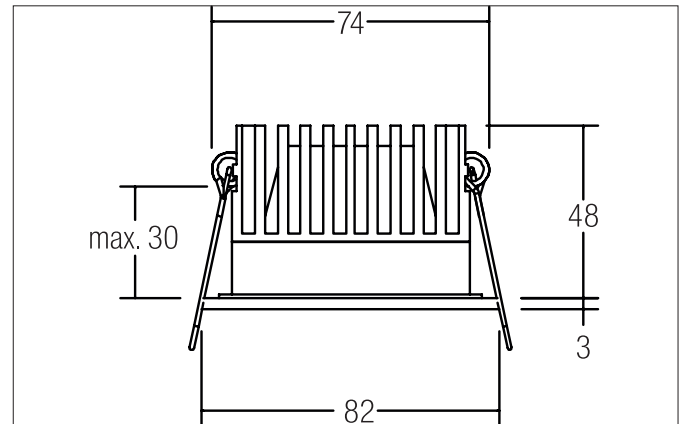



CALLIDA LED recessed downlight, dim2warm

Article no. 12116073


Tender

LED recessed downlight, dim2warm, white structure, Round. In a compact design, for installation in tool-less rapid assembly systems. Lamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Polycarbonate, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Power: 12 W, Amount of light sources / fittings: 1 piece, Luminous flux: from 30 lm up to 830 lm, Colour temperature: from 3.000 K to 1.800 K, Light colour: white, Beam angle: 18°, Adjustability: Not adjustable, without control gear, Dimmable: Depending on type of control gear, Type of dimming: Depending on driver.

Product Benefits

- Recessed downlight in round design made of massive aluminum.
- Ceiling cutout 74 mm, outer diameter 82 mm, mounting depth 48 mm, luminous flux 930 lm, IP20.
- Recessed light emission for improved glare reduction.
- Dimmable when using a suitable converter.
- If the luminaire is dimmed, the colour temperature is reduced (dim2warm, 3000 K - 1800 K).
- Also available as a factory complete set with dimmable converter (trailing-edge phase dimmer).


CALLIDA LED recessed downlight, dim2warm

Article no. 12116073

Article data	
Article no.	12116073
GTIN	4250047797227
Series name	CALLIDA
Short description	LED recessed downlight, dim2warm
Material	Aluminium / Polycarbonate
Colour	white structure
Type of surface	Structure
Shape	Round
Outer diameter	82 mm
Built-in diameter min.	73 mm
Built-in diameter max.	74 mm
Installation depth	48 mm
Hight	3 mm
Weight	0.216 kg
D licence plate	No
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K - 1.800 K
Light colour	white
Color Temperature 1	3,000 K
Color Temperature 2	1,800 K
Light output	Direct
Luminous flux	30 - 830 lm
Luminous flux 1	830 lm
Luminous flux 2	30 lm
Colour rendering	CRI > 90
Reflector	Faceted
Reflector colour	silver
Beam angle	18°
Light sharing	Symmetric
Adjustable color temperature	Infinite control

Operating technology of the luminaire	
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	III
Degree of protection	IP20
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	not required

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Max. ceiling thickness	30 mm
Further references	No cover with thermal insulation material
Cover	Plastic, transparent
Suitable for through-wiring	Yes, with optional accessories



CALLIDA LED recessed downlight, dim2warm
Article no. 12116073

Packing data	
Gross weight	0.259 kg
Length of packaging	95 mm
Packaging width	95 mm
Packaging hight	70 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.


CALLIDA LED recessed downlight, dim2warm

Article no. 12116073

Required accessories

Article no.: 17664000

LED converter 350 mA, trailing-edge phase dimmable

Power: 10,2 - 14 W, Plug&Play

Dimensions: 125 mm x 51 mm x 20 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17664000_2021_DE.pdf

Article no.: 17664020

LED converter 350 mA, trailing-edge phase dimmable

Power: 10,2 - 14 W, Plug&Play + Anschlussbox

Dimensions: 125 mm x 51 mm x 20 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17664020_2021_DE.pdf

Article no.: 17643000

LED converter 350 mA, trailing-edge phase dimmable

Power: 8,8 - 18 W, Plug&Play

Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17643000_2021_DE.pdf

Article no.: 17643020

LED converter 350 mA, trailing-edge phase dimmable

Power: 8,8 - 18 W, Plug&Play + Anschlussbox

Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17643020_2021_DE.pdf

Article no.: 17657000

LED converter 350 mA, 1-10 V dimmable (analog)

Power: 5,2 - 18 W, Plug&Play

Dimensions: 110 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17657000_2021_DE.pdf

Article no.: 17683000

LED converter 350 mA, DALI dimmable (digital)

Power: 3,5 - 17 W, Plug&Play

Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17683000_2021_DE.pdf

Article no.: 17683020

LED converter 350 mA, DALI dimmable (digital)

Power: 3,5 - 17 W, Plug&Play + Anschlussbox

Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf

Article no.: 17671000

LED converter 350mA, ZigBee dimmable

Power: 3,5 - 18,5 W, Plug&Play

Dimensions: 146.5 mm x 44 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf

Article no.: 17671020

LED converter 350mA, ZigBee dimmable

Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox

Dimensions: 146.5 mm x 44 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf

Article no.: 17672000

LED converter 350mA, Casambi dimmable

Power: 3,5 - 18,5 W, Plug&Play

Dimensions: 146.5 mm x 44 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf

**CALLIDA LED recessed downlight, dim2warm**

Article no. 12116073

Required accessories

Article no.: 17672020

LED converter 350mA, Casambi dimmable

Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox

Dimensions: 146.5 mm x 44 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17672020_2021_DE.pdf**Optional accessories**

Article no.: 3835

Plug&Play extension cable 350 mA

Dimensions: 500 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_00003835_2021_DE.pdf

Article no.: 3836

Plug&Play extension cable 350 mA

Dimensions: 1,000 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_00003836_2021_DE.pdf

Article no.: 3837

Plug&Play extension cable 350 mA

Dimensions: 2,000 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_00003837_2021_DE.pdf