



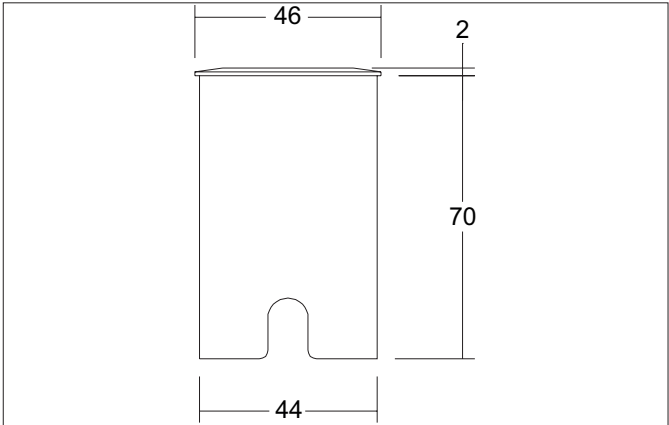

**HYBRIDE MINI LED-floor recessed light, V4A, IP65**  
Article no. 14051223

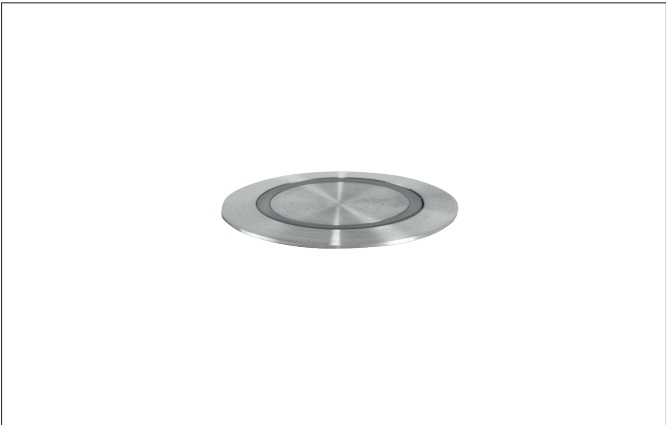

| Tender                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| LED-floor recessed light, V4A, IP65, Round. Ceiling cut-out Ø 44 mm, Installation depth 70 mm, Outer diameter 46 mm, Weight 0,427 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover glass opalLuminous flux 3 lm, Power 1 x 1,4 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Stainless steel V4A / Aluminium / Glass, Colour: stainless steel matt, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): III, Degree of protection (DIN EN 60529): IP65. For connection to an external driver, which is not included in the scope of delivery of the luminaire. Depending on driver dimmable. |  |

| Article data       |                                         |
|--------------------|-----------------------------------------|
| Article no.        | 14051223                                |
| GTIN               | 4251433925620                           |
| Series name        | HYBRIDE MINI                            |
| Short description  | LED-floor recessed light, V4A, IP65     |
| Material           | Stainless steel V4A / Aluminium / Glass |
| Colour             | stainless steel matt                    |
| Shape              | Round                                   |
| Outer diameter     | 46 mm                                   |
| Built-in diameter  | 44 mm                                   |
| Installation depth | 70 mm                                   |
| Scope of delivery  | incl. 3,000 mm connection cable         |
| Weight             | 0.427 kg                                |
| Conformance        | CE, UKCA                                |


**HYBRIDE MINI LED-floor recessed light, V4A, IP65**

Article no. 14051223

| Lighting technology          |           |
|------------------------------|-----------|
| Colour temperature           | 3.000 K   |
| Light colour                 | white     |
| Luminous flux                | 3 lm      |
| System efficiency            | 2 lm/W    |
| Colour rendering             | CRI > 80  |
| Reflector                    | Without   |
| Beam angle                   | 100°      |
| Light sharing                | Symmetric |
| Adjustable color temperature | No        |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 1.4 W                                                                                                                                                    |
| Voltage type                          | DC                                                                                                                                                       |
| DC nominal voltage max                | 24 V                                                                                                                                                     |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | Without fitting                                                                                                                                          |
| Protection class                      | III                                                                                                                                                      |
| Degree of protection                  | IP65                                                                                                                                                     |
| Control                               | Depending on driver                                                                                                                                      |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Energy efficiency class               | not required                                                                                                                                             |

| Mounting technology         |                   |
|-----------------------------|-------------------|
| Mounting method             | Recessed mounting |
| Place of installation       | Floor-mounted     |
| Adjustability               | Not adjustable    |
| Over rollable               | No                |
| Further references          | V4A               |
| Cover                       | Glass opal        |
| Suitable for through-wiring | Yes               |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.478 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 128 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 95 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height        | 70 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |

**HYBRIDE MINI LED-floor recessed light, V4A, IP65**

Article no. 14051223

**Required accessories**

Article no.: 17214000

LED power supply 24 V DC, on/off switchable

Power: 1 - 7,2 W

Dimensions: 68 mm x 35 mm x 21 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17214000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17214000_2021_DE.pdf)

Article no.: 17206000

LED power supply 24 V DC, 1-10 V dimmable (analog)

Power: 1 - 20 W

Dimensions: 146 mm x 55 mm x 19 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17206000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17206000_2021_DE.pdf)

Article no.: 17207000

LED power supply 24 V DC, on/off switchable

Power: 1 - 30 W

Dimensions: 160 mm x 50 mm x 22 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17207000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17207000_2021_DE.pdf)