
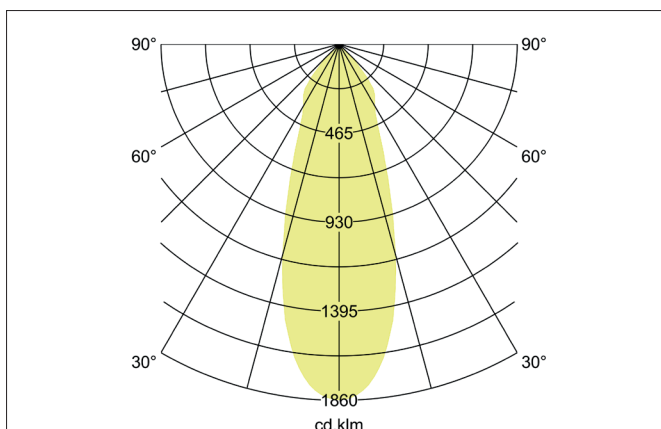
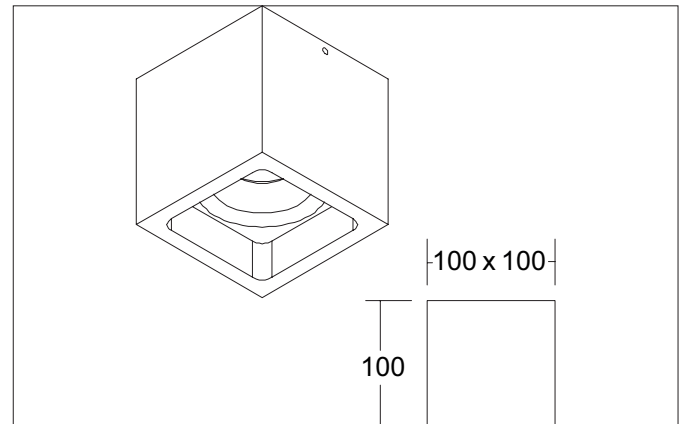



NIRUH LED surface-mounted ceiling downlight, switchable

Article no. 12075183


Tender

LED surface-mounted ceiling downlight, switchable, Square. Luminaire length 100.0 mm, Luminaire width 100.0 mm, Height 100.0 mm Weight 1.384 kg, Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. Cover glass transparent Luminous flux 1.125 lm, Power 1 x 15 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Glass, Colour: black structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, on/off switchable.

Article data	
Article no.	12075183
GTIN	4250047781462
Series name	NIRUH
Short description	LED surface-mounted ceiling downlight, switchable
Material	Aluminium / Glass
Colour	black structure
Type of surface	Structure
Shape	Square
Length	100 mm
Width	100 mm
Height	100 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, switchable
Weight	1.384 kg
D licence plate	No
Conformance	CE, UKCA


NIRUH LED surface-mounted ceiling downlight, switchable

Article no. 12075183

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct
Luminous flux	1,125 lm
System efficiency	75 lm/W
Colour rendering	CRI > 80
Reflector	High-gloss
Reflector colour	silver
Beam angle	38°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	15 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP20
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Energy efficiency class	not required

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Cover	Glass transparent

Packing data	
Gross weight	1.57 kg
Length of packaging	150 mm
Packaging width	120 mm
Packaging height	160 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.