
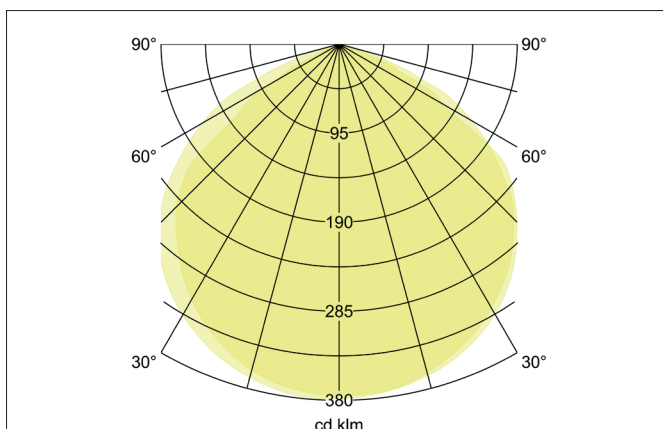
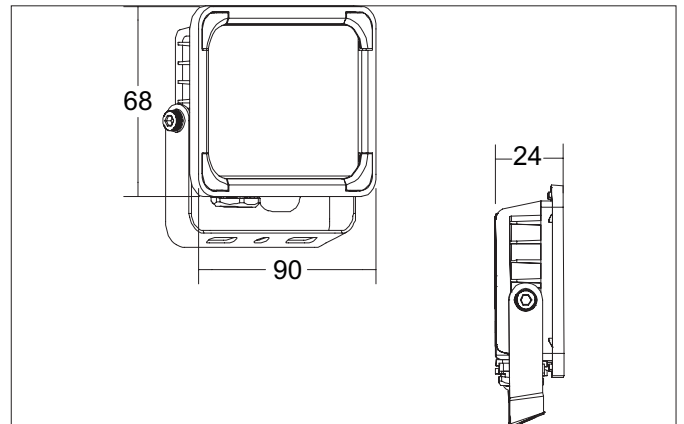


**NEO MICRO LED Floodlight, IP65**

Article no. 60811183

**Tender**

LED Floodlight, IP65, Rectangular. Luminaire length 68.0 mm, Luminaire width 90.0 mm, Height 24.0 mm Weight 0.217 kg, with rotations-symmetrical, deep, wide distributed light intensity. Cover glass transparent Luminous flux 1.120 lm, UGR < 25, Power 1 x 10 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L80/B10 at 25 °C: 50.000 h, Housing material: Aluminium / Glass, Colour: black structure, Permissible ambient temperature (ta): -20 °C up to +50 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65, shock resistance according to IEC62262: IK08 .With electronic driver, on/off switchable.


NEO MICRO LED Floodlight, IP65

Article no. 60811183

Article data	
Article no.	60811183
GTIN	4251433971740
Series name	NEO MICRO
Short description	LED Floodlight, IP65
Material	Aluminium / Glass
Colour	black structure
RAL colour	9017
Type of surface	Structure
Shape	Rectangular
Length	68 mm
Width	90 mm
Hight	24 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage and connection cable 1,000 mm
Weight	0.217 kg
Length of the connection line	1,000 mm
D licence plate	No
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct
Luminous flux	1,120 lm
System efficiency	112 lm/W
Colour rendering	CRI > 80
Luminaire optics	Lens
Reflector	Other
Beam angle	120°
Glare evaluation	UGR < 25
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP65
Ambient temperature	-20°C up to +50°C
Dimmable	No
Control	on/off
Length of the connection line	1,000 mm
Design of the connecting cable	3 x 1 mm ² , rubber cable
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L80/B10 at 25 °C	50.000 h
Energy efficiency class	not required

Mounting technology	
Mounting method	Surface mounting
Place of installation	Wall-mounted
Impact resistance	IK08
Cover	Glass transparent
Suitable for through-wiring	No



NEO MICRO LED Floodlight, IP65
Article no. 60811183

Packing data	
Gross weight	0.252 kg
Length of packaging	145 mm
Packaging width	95 mm
Packaging hight	30 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.