




**M1 Recessed housing, square, flush, recessed with module holder, pivoted**

Article no. 45011560

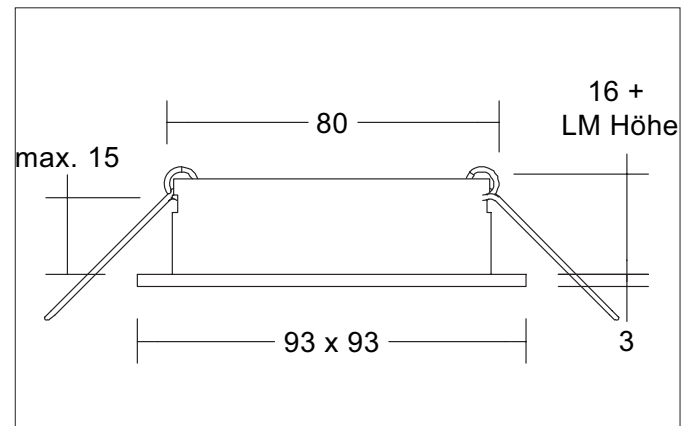

**Tender**

Recessed housing, square, flush, recessed with module holder, pivoted, black structure / white structure, Square. In a compact design, for installation in tool-less rapid assembly systems. Lamp holder: Without fitting, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium, Degree of protection: (DIN EN 60529) IP20, Protection class: (DIN EN 61140) III, Power: 13 W, Amount of light sources / fittings: 1 piece, Adjustability: Pivoted, without control gear, Dimmable: Depending on type of control gear, Type of dimming: Depending on driver.

**Product Benefits**

- Part of the modular M1 system for recessed and surface-mounted ceilings.
- Empty housing for accommodating Brumberg LED modules up to a max. output of max. 12.5 W.
- Also available as a similar, rigid housing on the room side in IP44 version.
- Available in single color textured white, textured black or in combination textured white / textured black or textured black / textured white.
- 155 further housing versions plus approx. 30 different LED modules for these housing versions for all common control types.
- Multi-lamp versions also in the portfolio.


**M1 Recessed housing, square, flush, recessed with module holder, pivoted**

Article no. 45011560

| Article data           |                                                                       |
|------------------------|-----------------------------------------------------------------------|
| Article no.            | 45011560                                                              |
| GTIN                   | 4251433931287                                                         |
| Series name            | M1                                                                    |
| Short description      | Recessed housing, square, flush, recessed with module holder, pivoted |
| Material               | Aluminium                                                             |
| Colour                 | black structure / white structure                                     |
| Type of surface        | Structure                                                             |
| Shape                  | Square                                                                |
| Length                 | 93 mm                                                                 |
| Width                  | 93 mm                                                                 |
| Built-in diameter min. | 79 mm                                                                 |
| Built-in diameter max. | 80 mm                                                                 |
| Installation depth     | 86 mm                                                                 |
| Hight                  | 3 mm                                                                  |
| Scope of delivery      | incl. recessed module holder, swivel-mounted                          |
| Weight                 | 0.133 kg                                                              |
| D licence plate        | No                                                                    |
| Conformance            | CE, UKCA                                                              |

| Operating technology of the luminaire |                                   |
|---------------------------------------|-----------------------------------|
| Voltage type                          | DC                                |
| Lamp                                  | For LED                           |
| Lamp holder                           | Without fitting                   |
| Protection class                      | III                               |
| Degree of protection                  | IP20                              |
| Dimmable                              | Depending on type of control gear |
| Control                               | Depending on driver               |
| Energy efficiency class               | not required                      |

| Mounting technology         |                                                     |
|-----------------------------|-----------------------------------------------------|
| Mounting method             | Recessed mounting                                   |
| Place of installation       | Ceiling-mounted                                     |
| Adjustability               | Pivoted                                             |
| Swivel angle                | 20°                                                 |
| Max. ceiling thickness      | 15 mm                                               |
| Further references          | No cover with thermal insulation material Smarthome |
| Cover                       | Without cover                                       |
| Circlip                     | Without circlip                                     |
| Suitable for through-wiring | Yes, with optional accessories                      |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.162 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 115 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 100 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging hight         | 50 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |


**M1 Recessed housing, square, flush, recessed with module holder, pivoted**

Article no. 45011560

| Compatible LED-modu- |        |            |                                                             |                  |               |         |       |
|----------------------|--------|------------|-------------------------------------------------------------|------------------|---------------|---------|-------|
| Article no.          | Power  | Beam angle | Colour temperature                                          | Colour rendering | Luminous flux | Input   | Hight |
| 12925003             | 3 W    | 38°        | 2.700 K                                                     | CRI > 80         | 290 lm        | 350 mA  | 40 mm |
| 12926003             | 3 W    | 38°        | 3.000 K                                                     | CRI > 80         | 310 lm        | 350 mA  | 40 mm |
| 12925004             | 3 W    | 38°        | 4.000 K                                                     | CRI > 80         | 340 lm        | 350 mA  | 40 mm |
| 12923383             | 6 W    | 38°        | 2.700 K                                                     | CRI > 80         | 740 lm        | 350 mA  | 32 mm |
| 12923603             | 6 W    | 60°        | 2.700 K                                                     | CRI > 80         | 720 lm        | 350 mA  | 32 mm |
| 12927383             | 6 W    | 38°        | 2.700 K                                                     | CRI > 90         | 600 lm        | 350 mA  | 32 mm |
| 12924383             | 6 W    | 38°        | 3.000 K                                                     | CRI > 80         | 730 lm        | 350 mA  | 32 mm |
| 12924603             | 6 W    | 60°        | 3.000 K                                                     | CRI > 80         | 770 lm        | 350 mA  | 32 mm |
| 12928383             | 6 W    | 38°        | 3.000 K                                                     | CRI > 90         | 680 lm        | 350 mA  | 32 mm |
| 12924384             | 6 W    | 38°        | 3.500 K                                                     | CRI > 80         | 730 lm        | 350 mA  | 32 mm |
| 12924604             | 6 W    | 60°        | 3.500 K                                                     | CRI > 80         | 770 lm        | 350 mA  | 32 mm |
| 12928384             | 6 W    | 38°        | 3.500 K                                                     | CRI > 90         | 680 lm        | 350 mA  | 32 mm |
| 12923384             | 6 W    | 38°        | 4.000 K                                                     | CRI > 80         | 770 lm        | 350 mA  | 32 mm |
| 12923604             | 6 W    | 60°        | 4.000 K                                                     | CRI > 80         | 790 lm        | 350 mA  | 32 mm |
| 12927384             | 6 W    | 38°        | 4.000 K                                                     | CRI > 90         | 720 lm        | 350 mA  | 32 mm |
| 12920183             | 6 W    | 18°        | 3.000 K                                                     | CRI > 80         | 740 lm        | 350 mA  | 31 mm |
| 12920243             | 6 W    | 24°        | 3.000 K                                                     | CRI > 80         | 760 lm        | 350 mA  | 31 mm |
| 12920003             | 6 W    | 38°        | 3.000 K                                                     | CRI > 80         | 780 lm        | 350 mA  | 31 mm |
| 12920603             | 6 W    | 60°        | 3.000 K                                                     | CRI > 80         | 760 lm        | 350 mA  | 31 mm |
| 12920184             | 6 W    | 18°        | 4.000 K                                                     | CRI > 80         | 780 lm        | 350 mA  | 31 mm |
| 12920244             | 6 W    | 24°        | 4.000 K                                                     | CRI > 80         | 790 lm        | 350 mA  | 31 mm |
| 12920004             | 6 W    | 38°        | 4.000 K                                                     | CRI > 80         | 810 lm        | 350 mA  | 31 mm |
| 12920604             | 6 W    | 60°        | 4.000 K                                                     | CRI > 80         | 780 lm        | 350 mA  | 31 mm |
| 12963383             | 6 W    | 38°        | 3.000 K - 1.800 K                                           | CRI > 90         | 460 lm        | 350 mA  | 32 mm |
| 12963603             | 6 W    | 60°        | 3.000 K - 1.800 K                                           | CRI > 90         | 460 lm        | 350 mA  | 32 mm |
| 12953003             | 12 W   | 38°        | 2.700 K                                                     | CRI > 80         | 1,130 lm      | 350 mA  | 70 mm |
| 12954003             | 12 W   | 38°        | 3.000 K                                                     | CRI > 80         | 1,360 lm      | 350 mA  | 70 mm |
| 12954004             | 12 W   | 38°        | 3.500 K                                                     | CRI > 80         | 1,290 lm      | 350 mA  | 70 mm |
| 12953004             | 12 W   | 38°        | 4.000 K                                                     | CRI > 80         | 1,300 lm      | 350 mA  | 70 mm |
| 12965003             | 12 W   | 38°        | 3.000 K - 1.800 K                                           | CRI > 90         | 930 lm        | 350 mA  | 70 mm |
| 12983003             | 12.5 W | 38°        | 3.000 K                                                     | CRI > 97         | 920 lm        | 350 mA  | 95 mm |
| 12823003             | 8 W    | 60°        | 2.850 K                                                     | CRI > 90         | 900 lm        | 24.00 V | 52 mm |
| 12845604             | 8 W    | 60°        | 2.700 K - 6.500 K                                           | CRI > 90         | 659 lm        | 24.00 V | 52 mm |
| 18438002             | 8 W    | 60°        | RGB + WW                                                    | CRI > 90         | 400 lm        | 24.00 V | 52 mm |
| 12929503             | 6.3 W  | 50°        | 2.700 K / 3.000 K / 4.000 K                                 | CRI > 80         | 1,023 lm      | 350 mA  | 34 mm |
| 12930503             | 5.9 W  | 50°        | 2.700 K / 3.000 K / 4.000 K                                 | CRI > 90         | 810 lm        | 350 mA  | 34 mm |
| 12933553             | 6 W    | 55°        | 2.700 K / 3.000 K / 4.000 K + dim-2warm (3.000 K - 2.200 K) | CRI > 90         | 730 lm        | 350 mA  | 32 mm |


**M1 Recessed housing, square, flush, recessed with module holder, pivoted**

Article no. 45011560

**Required accessories**

Article no.: 17665000

LED converter 350 mA, switchable

Power: 1 - 3,2 W, Plug&amp;Play

Dimensions: 52 mm x 30 mm x 23 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17665000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17665000_2021_DE.pdf)

Article no.: 17662000

LED converter 350 mA, on/off switchable

Power: 1 - 7,2 W, Plug&amp;Play

Dimensions: 68 mm x 35 mm x 21 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17662000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf)

Article no.: 17662020

LED converter 350 mA, on/off switchable

Power: 1 - 7,2 W, Plug&amp;Play + Anschlussbox

Dimensions: 68 mm x 35 mm x 21 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17662020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf)

Article no.: 17613000

LED converter 350 mA, on/off switchable

Power: 1 - 15 W, Plug&amp;Play

Dimensions: 115 mm x 34 mm x 19 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17613000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf)

Article no.: 17613020

LED converter 350 mA, on/off switchable

Power: 1 - 15 W, Plug&amp;Play + Anschlussbox

Dimensions: 115 mm x 34 mm x 19 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17613020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf)

Article no.: 17621000

LED converter 350 mA, on/off switchable

Power: 1 - 21 W, Plug&amp;Play

Dimensions: 128 mm x 50 mm x 13 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17621000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf)

Article no.: 17621020

LED converter 350 mA, on/off switchable

Power: 1 - 21 W, Plug&amp;Play + Anschlussbox

Dimensions: 128 mm x 50 mm x 13 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17621020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf)

Article no.: 17663000

LED converter 350 mA, trailing-edge phase dimmable

Power: 2,8 - 7 W, Plug&amp;Play

Dimensions: 110 mm x 50 mm x 19 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17663000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf)

Article no.: 17663020

LED converter 350 mA, trailing-edge phase dimmable

Power: 2,8 - 7 W, Plug&amp;Play + Anschlussbox

Dimensions: 110 mm x 50 mm x 19 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17663020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf)

Article no.: 17664000

LED converter 350 mA, trailing-edge phase dimmable

Power: 10,2 - 14 W, Plug&amp;Play

Dimensions: 125 mm x 51 mm x 20 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17664000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17664000_2021_DE.pdf)


**M1 Recessed housing, square, flush, recessed with module holder, pivoted**

Article no. 45011560

**Required accessories**

Article no.: 17664020

LED converter 350 mA, trailing-edge phase dimmable

Power: 10,2 - 14 W, Plug&amp;Play + Anschlussbox

Dimensions: 125 mm x 51 mm x 20 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17664020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17664020_2021_DE.pdf)

Article no.: 17652000

LED-round converter 350 mA, trailing-edge phase dimmer

Power: 4,9 - 7 W, Plug&amp;Play

Dimensions: 51 mm x 24 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17652000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf)

Article no.: 17652020

LED-round converter 350 mA, trailing-edge phase dimmer

Power: 4,9 - 7 W, Plug&amp;Play + Anschlussbox

Dimensions: 51 mm x 24 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17652020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17652020_2021_DE.pdf)

Article no.: 17640000

LED converter 350 mA, trailing-edge phase dimmable

Power: 4,2 - 10 W, Plug&amp;Play

Dimensions: 102 mm x 38 mm x 21 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17640000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17640000_2021_DE.pdf)

Article no.: 17640020

LED converter 350 mA, trailing-edge phase dimmable

Power: 4,2 - 10 W, Plug&amp;Play + Anschlussbox

Dimensions: 102 mm x 38 mm x 21 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17640020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf)

Article no.: 17643000

LED converter 350 mA, trailing-edge phase dimmable

Power: 8,8 - 18 W, Plug&amp;Play

Dimensions: 110.5 mm x 52 mm x 22 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17643000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17643000_2021_DE.pdf)

Article no.: 17643020

LED converter 350 mA, trailing-edge phase dimmable

Power: 8,8 - 18 W, Plug&amp;Play + Anschlussbox

Dimensions: 110.5 mm x 52 mm x 22 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17643020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17643020_2021_DE.pdf)

Article no.: 17648000

LED converter 350 mA, trailing-edge phase dimmable

Power: 0,7 - 17 W, Plug&amp;Play

Dimensions: 166 mm x 46 mm x 34 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17648000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17648000_2021_DE.pdf)

Article no.: 17648020

LED converter 350 mA, trailing-edge phase dimmable

Power: 0,7 - 17 W, Plug&amp;Play + Anschlussbox

Dimensions: 166 mm x 46 mm x 34 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17648020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf)

Article no.: 17657000

LED converter 350 mA, 1-10 V dimmable (analog)

Power: 5,2 - 18 W, Plug&amp;Play

Dimensions: 110 mm x 52 mm x 22 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17657000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17657000_2021_DE.pdf)


**M1 Recessed housing, square, flush, recessed with module holder, pivoted**

Article no. 45011560

| Required accessories                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Article no.: 17684000<br>LED converter 350 mA, DALI dimmable (digital)<br>Power: 2,8 - 7 W, Plug&Play<br>Dimensions: 130 mm x 42 mm x 22 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17684000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17684000_2021_DE.pdf</a>                       |
| Article no.: 17684020<br>LED converter 350 mA, DALI dimmable (digital)<br>Power: 2,8 - 7 W, Plug&Play + Anschlussbox<br>Dimensions: 130 mm x 42 mm x 22 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17684020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17684020_2021_DE.pdf</a>        |
| Article no.: 17658000<br>LED round converter 350 mA, DALI dimmable (digital)<br>Power: 2,1 - 9 W, Plug&Play<br>Dimensions: 56 mm x 25 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf</a>                          |
| Article no.: 17658020<br>LED round converter 350 mA, DALI dimmable (digital)<br>Power: 2,1 - 9 W, Plug&Play + Anschlussbox<br>Dimensions: 56 mm x 25 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf</a>           |
| Article no.: 17683000<br>LED converter 350 mA, DALI dimmable (digital)<br>Power: 3,5 - 17 W, Plug&Play<br>Dimensions: 110.5 mm x 52 mm x 22 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17683000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17683000_2021_DE.pdf</a>                    |
| Article no.: 17683020<br>LED converter 350 mA, DALI dimmable (digital)<br>Power: 3,5 - 17 W, Plug&Play + Anschlussbox<br>Dimensions: 110.5 mm x 52 mm x 22 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf</a>     |
| Article no.: 17682000<br>LED converter 350 mA, DALI dimmable (digital)<br>Power: 1,8 - 18,5 W, Plug&Play<br>Dimensions: 146.5 mm x 43.5 mm x 22 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17682000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17682000_2021_DE.pdf</a>                |
| Article no.: 17682020<br>LED converter 350 mA, DALI dimmable (digital)<br>Power: 1,8 - 18,5 W, Plug&Play + Anschlussbox<br>Dimensions: 146.5 mm x 43.5 mm x 22 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17682020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17682020_2021_DE.pdf</a> |
| Article no.: 17671000<br>LED converter 350mA, ZigBee dimmable<br>Power: 3,5 - 18,5 W, Plug&Play<br>Dimensions: 146.5 mm x 44 mm x 30 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf</a>                           |
| Article no.: 17671020<br>LED converter 350mA, ZigBee dimmable<br>Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox<br>Dimensions: 146.5 mm x 44 mm x 30 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf</a>            |


**M1 Recessed housing, square, flush, recessed with module holder, pivoted**

Article no. 45011560

**Required accessories**

Article no.: 17672000

LED converter 350mA, Casambi dimmable

Power: 3,5 - 18,5 W, Plug&amp;Play

Dimensions: 146.5 mm x 44 mm x 30 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17672000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf)

Article no.: 17672020

LED converter 350mA, Casambi dimmable

Power: 3,5 - 18,5 W, Plug&amp;Play + Anschlussbox

Dimensions: 146.5 mm x 44 mm x 30 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17672020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17672020_2021_DE.pdf)
**Optional accessories**

Article no.: 3835

Plug&amp;Play extension cable 350 mA

Dimensions: 500 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_00003835\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_00003835_2021_DE.pdf)

Article no.: 3836

Plug&amp;Play extension cable 350 mA

Dimensions: 1,000 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_00003836\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_00003836_2021_DE.pdf)

Article no.: 3837

Plug&amp;Play extension cable 350 mA

Dimensions: 2,000 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_00003837\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_00003837_2021_DE.pdf)

Article no.: 5327

Leaf spring set (2 pieces)

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_00532700\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_00532700_2021_DE.pdf)