
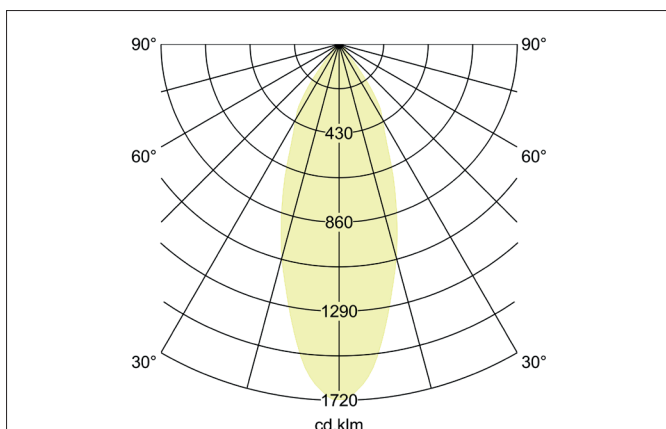
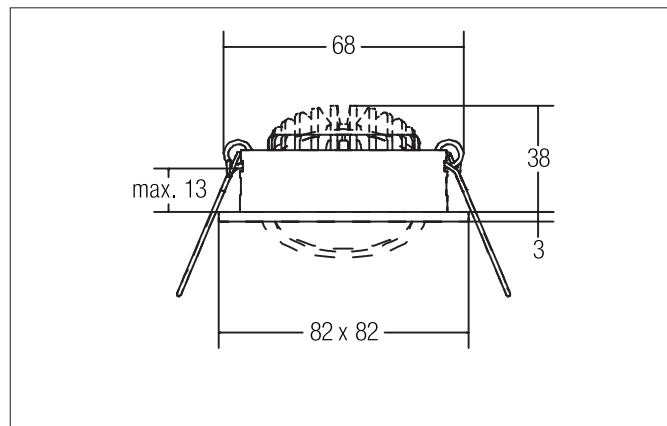



LOOP®-S LED recessed spot set, trailing-edge phase dimmable

Article no. 39385173


Tender

LED recessed spot set, trailing-edge phase dimmable, Square. Toolless ceiling installation by installation springs. Ceiling cut-out Ø 68 mm, Installation depth 38 mm, Length 82 mm, Width 82 mm, Weight 0,203 kg, Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, transparent Luminous flux 450 lm, Power 1 x 5 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 90, Rated life time L80/B20 at 25 °C: 50.000 h, Housing material: Nylon / Magnesium Hydroxide / Fiberglass, Colour: white structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20. With electronic driver, Trailing-edge phase dimmable.

Product Benefits

LOOP®- Light Of Ocean Plastic.

The first certified LED recessed luminaire housing made of 100% recycled Ocean Plastic.

Plastic waste in the ocean is a global catastrophe, so we must do something about it. We are making an important contribution with the first luminaire whose plastic content is made from 100 percent recycled ocean plastic. With LOOP®, we are setting new standards for sustainable lighting solutions on the global market, which reflect high quality, functionality and aesthetics. Even the converter housing (L 72 x W 45 x H 23 mm) is also made of recycled ocean plastic.


LOOP®-S LED recessed spot set, trailing-edge phase dimmable

Article no. 39385173

Article data	
Article no.	39385173
GTIN	4251433981985
Series name	LOOP®-S
Short description	LED recessed spot set, trailing-edge phase dimmable
Material	Nylon / Magnesium Hydroxide / Fiberglass
Colour	white structure
Type of surface	Structure
Shape	Square
Length	82 mm
Width	82 mm
Built-in diameter min.	67 mm
Built-in diameter max.	68 mm
Installation depth	38 mm
Hight	3 mm
Weight	0.203 kg
D licence plate	No
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light output	Direct
Luminous flux	450 lm
System efficiency	90 lm/W
Colour rendering	CRI > 90
Reflector	Faceted
Reflector colour	silver
Beam angle	38°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the light source	
Article No. of used light source	04100213
Power	5 W
Voltage type	DC
Current	125 mA
Lamp	LED
Protection class	III

Operating technology of driver	
Article No. of used driver	04300265
Length	82 mm
Width	45.4 mm
Hight	23.5 mm
AC nominal voltage min	220 V
AC nominal voltage max	240 V
Frequency max	63 Hz
Dimmable	Yes
Control	Trailing-edge phase
	3 W
Power max.	5 W
Output current up to	125 mA
Degree of protection	IP20
Protection class	II


LOOP®-S LED recessed spot set, trailing-edge phase dimmable

Article no. 39385173

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Pivoted
Swivel angle	20°
Max. ceiling thickness	15 mm
Further references	No cover with thermal insulation material
Cover	Plastic, transparent
Circlip	Without circlip
Suitable for through-wiring	Yes

Packing data	
Gross weight	0.254 kg
Length of packaging	102 mm
Packaging width	88 mm
Packaging height	84 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

Optional accessories	
Article no.: 81063080	
Honeycomb grid for glare control, diameter 48 mm	
Dimensions: 48 mm x 3 mm	
	https://www.brumberg.com/fileadmin/products/Datenblatt_81063080_2021_DE.pdf
Article no.: 5327	
Leaf spring set (2 pieces)	
	https://www.brumberg.com/fileadmin/products/Datenblatt_00532700_2021_DE.pdf