




## TIRRELdeep Recessed spot, GU10

Article no. 36063080

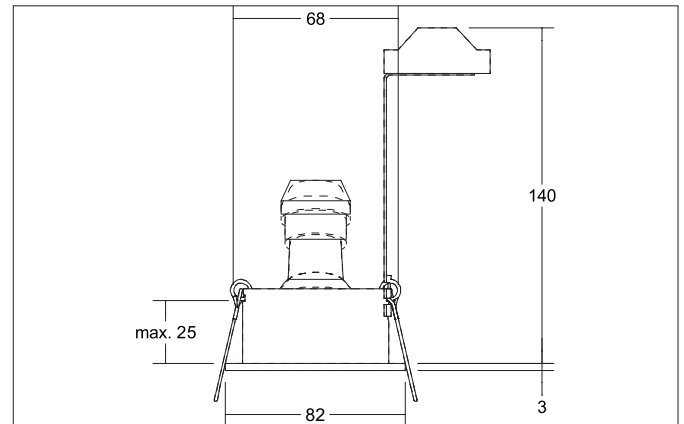

### Tender

Recessed spot, GU10, black matt, Round. In a compact design, for installation in tool-less rapid assembly systems. Lamp holder: GU10, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 10 W, Amount of light sources / fittings: 1 piece, Adjustability: Pivoted, without control gear, Type of dimming: Other.

### Product Benefits

- Recessed recessed spotlight in round design made of solid aluminum for LED retrofit lamps with GU10 base.
- Incl. bracket for standard-compliant strain relief.
- Ceiling cut-out 68 mm, diameter 82 mm, installation depth 140 mm, IP20.
- Pivoting range 25°.
- Without visible snap ring.
- Classic, formally restrained design.
- Also available in the same look as a GX5.3 version, as a switchable and dimmable set (phase cut-off).


**TIRRELdeep Recessed spot, GU10**

Article no. 36063080

| Article data       |                     |
|--------------------|---------------------|
| Article no.        | 36063080            |
| GTIN               | 4251433953661       |
| Series name        | TIRRELdeep          |
| Short description  | Recessed spot, GU10 |
| Material           | Aluminium           |
| Colour             | black matt          |
| Type of surface    | Matt                |
| Shape              | Round               |
| Outer diameter     | 82 mm               |
| Built-in diameter  | 68 mm               |
| Installation depth | 140 mm              |
| Hight              | 3 mm                |
| Weight             | 0.127 kg            |
| D licence plate    | No                  |
| Conformance        | CE, UKCA            |

| Operating technology of the luminaire |                        |
|---------------------------------------|------------------------|
| Voltage type                          | AC                     |
| AC nominal voltage max                | 230 V                  |
| Frequency max                         | 50 Hz                  |
| Lamp                                  | For LED-retrofill lamp |
| Lamp holder                           | GU10                   |
| Protection class                      | II                     |
| Degree of protection                  | IP20                   |
| Control                               | Other                  |
| Bulb change possible                  | Yes                    |
| Energy efficiency class               | not required           |

| Mounting technology    |                                           |
|------------------------|-------------------------------------------|
| Mounting method        | Recessed mounting                         |
| Place of installation  | Ceiling-mounted                           |
| Adjustability          | Pivoted                                   |
| Swivel angle           | 25°                                       |
| Max. ceiling thickness | 25 mm                                     |
| Further references     | No cover with thermal insulation material |
| Cover                  | Without cover                             |
| Circlip                | Without circlip                           |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.187 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 140 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 110 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging hight         | 120 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |



**TIRRELdeep Recessed spot, GU10**  
Article no. 36063080

**Optional accessories**

Article no.: 81201080

Reducing ring D 110 mm, for luminaire cut-out size 68 mm

Dimensions: 110 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_81201080\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_81201080_2021_DE.pdf)

Article no.: 81202080

Reducing ring D 130 mm, for luminaire cut-out size 68 mm

Dimensions: 130 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_81202080\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_81202080_2021_DE.pdf)

Article no.: 81203080

Reducing ring D 145 mm, for luminaire cut-out size 68 mm

Dimensions: 145 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_81203080\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_81203080_2021_DE.pdf)