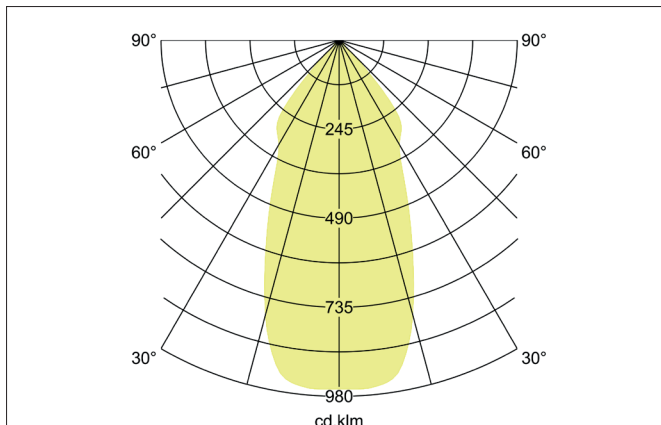
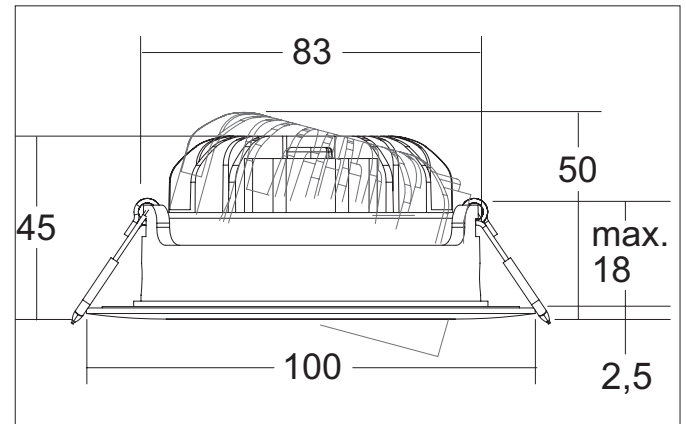



**BIG65 LED recessed spot, IP65**

Article no. 12494183


**Tender**

LED recessed spot, IP65, Round. Toolless ceiling installation by installation springs. Ceiling cut-out Ø 83 mm, Installation depth 50 mm, Outer diameter 100 mm, Weight 0,149 kg, Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. Cover PMMALuminous flux 730 lm, Power 1 x 7,5 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L80/B20 at 25 °C: 50.000 h, Housing material: Aluminium / Silicone rubber / PMMA, Colour: black structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): III, Degree of protection (DIN EN 60529): IP65. For connection to an external driver, which is not included in the scope of delivery of the luminaire. Depending on driver dimmable.

**Product Benefits**

- Protection class IP65 for application location damp room interior
- Enlarged luminaire (diameter 100 mm) with ceiling cut-out 83 mm
- Very valuable design
- Light emission 52 mm, 730 lm
- Power supply with 350 mA - high selection variance for converters
- Low installation depth with 50 mm
- Available in rigid and swiveling as optically coordinated series
- Available in three current colors


**BIG65 LED recessed spot, IP65**

Article no. 12494183

| Article data           |                                    |
|------------------------|------------------------------------|
| Article no.            | 12494183                           |
| GTIN                   | 4251433958055                      |
| Series name            | BIG65                              |
| Short description      | LED recessed spot, IP65            |
| Material               | Aluminium / Silicone rubber / PMMA |
| Colour                 | black structure                    |
| Type of surface        | Structure                          |
| Shape                  | Round                              |
| Outer diameter         | 100 mm                             |
| Built-in diameter min. | 80 mm                              |
| Built-in diameter max. | 83 mm                              |
| Installation depth     | 50 mm                              |
| Hight                  | 2.5 mm                             |
| Weight                 | 0.149 kg                           |
| D licence plate        | No                                 |
| Conformance            | CE, UKCA                           |

| Lighting technology          |           |
|------------------------------|-----------|
| Colour temperature           | 3.000 K   |
| Light colour                 | white     |
| Light output                 | Direct    |
| Luminous flux                | 730 lm    |
| System efficiency            | 97 lm/W   |
| Colour rendering             | CRI > 80  |
| Reflector                    | Faceted   |
| Reflector colour             | silver    |
| Beam angle                   | 45°       |
| Light sharing                | Symmetric |
| Adjustable color temperature | No        |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage type                          | DC                                                                                                                                                       |
| Current                               | 350 mA                                                                                                                                                   |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | Plug&Play                                                                                                                                                |
| Protection class                      | III                                                                                                                                                      |
| Protection class on the ceiling side  | IP20                                                                                                                                                     |
| Degree of protection                  | IP65                                                                                                                                                     |
| Dimmable                              | Depending on type of control gear                                                                                                                        |
| Control                               | Depending on driver                                                                                                                                      |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L80/B20 at 25 °C      | 50,000 h                                                                                                                                                 |
| Energy efficiency class               | not required                                                                                                                                             |

| Mounting technology         |                                           |
|-----------------------------|-------------------------------------------|
| Mounting method             | Recessed mounting                         |
| Place of installation       | Ceiling-mounted                           |
| Adjustability               | Pivoted                                   |
| Swivel angle                | 15°                                       |
| Max. ceiling thickness      | 18 mm                                     |
| Further references          | No cover with thermal insulation material |
| Cover                       | PMMA                                      |
| Suitable for through-wiring | Yes, with optional accessories            |



**BIG65 LED recessed spot, IP65**  
Article no. 12494183

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.186 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 120 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 110 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging hight         | 60 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |


**BIG65 LED recessed spot, IP65**

Article no. 12494183

**Required accessories**

Article no.: 17613000

LED converter 350 mA, on/off switchable

Power: 1 - 15 W, Plug&amp;Play

Dimensions: 115 mm x 34 mm x 19 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17613000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf)

Article no.: 17613020

LED converter 350 mA, on/off switchable

Power: 1 - 15 W, Plug&amp;Play + Anschlussbox

Dimensions: 115 mm x 34 mm x 19 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17613020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf)

Article no.: 17621000

LED converter 350 mA, on/off switchable

Power: 1 - 21 W, Plug&amp;Play

Dimensions: 128 mm x 50 mm x 13 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17621000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf)

Article no.: 17621020

LED converter 350 mA, on/off switchable

Power: 1 - 21 W, Plug&amp;Play + Anschlussbox

Dimensions: 128 mm x 50 mm x 13 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17621020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf)

Article no.: 17640000

LED converter 350 mA, trailing-edge phase dimmable

Power: 4,2 - 10 W, Plug&amp;Play

Dimensions: 102 mm x 38 mm x 21 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17640000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17640000_2021_DE.pdf)

Article no.: 17640020

LED converter 350 mA, trailing-edge phase dimmable

Power: 4,2 - 10 W, Plug&amp;Play + Anschlussbox

Dimensions: 102 mm x 38 mm x 21 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17640020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf)

Article no.: 17648000

LED converter 350 mA, trailing-edge phase dimmable

Power: 0,7 - 17 W, Plug&amp;Play

Dimensions: 166 mm x 46 mm x 34 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17648000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17648000_2021_DE.pdf)

Article no.: 17648020

LED converter 350 mA, trailing-edge phase dimmable

Power: 0,7 - 17 W, Plug&amp;Play + Anschlussbox

Dimensions: 166 mm x 46 mm x 34 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17648020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf)

Article no.: 17657000

LED converter 350 mA, 1-10 V dimmable (analog)

Power: 5,2 - 18 W, Plug&amp;Play

Dimensions: 110 mm x 52 mm x 22 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17657000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17657000_2021_DE.pdf)

Article no.: 17658000

LED round converter 350 mA, DALI dimmable (digital)

Power: 2,1 - 9 W, Plug&amp;Play

Dimensions: 56 mm x 25 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17658000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf)


**BIG65 LED recessed spot, IP65**

Article no. 12494183

**Required accessories**

Article no.: 17658020

LED round converter 350 mA, DALI dimmable (digital)

Power: 2,1 - 9 W, Plug&amp;Play + Anschlussbox

Dimensions: 56 mm x 25 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17658020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf)

Article no.: 17683000

LED converter 350 mA, DALI dimmable (digital)

Power: 3,5 - 17 W, Plug&amp;Play

Dimensions: 110.5 mm x 52 mm x 22 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17683000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17683000_2021_DE.pdf)

Article no.: 17683020

LED converter 350 mA, DALI dimmable (digital)

Power: 3,5 - 17 W, Plug&amp;Play + Anschlussbox

Dimensions: 110.5 mm x 52 mm x 22 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17683020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf)

Article no.: 17682000

LED converter 350 mA, DALI dimmable (digital)

Power: 1,8 - 18,5 W, Plug&amp;Play

Dimensions: 146.5 mm x 43.5 mm x 22 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17682000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17682000_2021_DE.pdf)

Article no.: 17682020

LED converter 350 mA, DALI dimmable (digital)

Power: 1,8 - 18,5 W, Plug&amp;Play + Anschlussbox

Dimensions: 146.5 mm x 43.5 mm x 22 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17682020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17682020_2021_DE.pdf)

Article no.: 17671000

LED converter 350mA, ZigBee dimmable

Power: 3,5 - 18,5 W, Plug&amp;Play

Dimensions: 146.5 mm x 44 mm x 30 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17671000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf)

Article no.: 17671020

LED converter 350mA, ZigBee dimmable

Power: 3,5 - 18,5 W, Plug&amp;Play + Anschlussbox

Dimensions: 146.5 mm x 44 mm x 30 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17671020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf)

Article no.: 17672000

LED converter 350mA, Casambi dimmable

Power: 3,5 - 18,5 W, Plug&amp;Play

Dimensions: 146.5 mm x 44 mm x 30 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17672000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf)

Article no.: 17672020

LED converter 350mA, Casambi dimmable

Power: 3,5 - 18,5 W, Plug&amp;Play + Anschlussbox

Dimensions: 146.5 mm x 44 mm x 30 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17672020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17672020_2021_DE.pdf)

**BIG65 LED recessed spot, IP65**

Article no. 12494183

**Optional accessories**

Article no.: 3835

Plug&amp;Play extension cable 350 mA

Dimensions: 500 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_00003835\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_00003835_2021_DE.pdf)

Article no.: 3836

Plug&amp;Play extension cable 350 mA

Dimensions: 1,000 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_00003836\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_00003836_2021_DE.pdf)

Article no.: 3837

Plug&amp;Play extension cable 350 mA

Dimensions: 2,000 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_00003837\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_00003837_2021_DE.pdf)

Article no.: 5327

Leaf spring set (2 pieces)

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_00532700\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_00532700_2021_DE.pdf)