




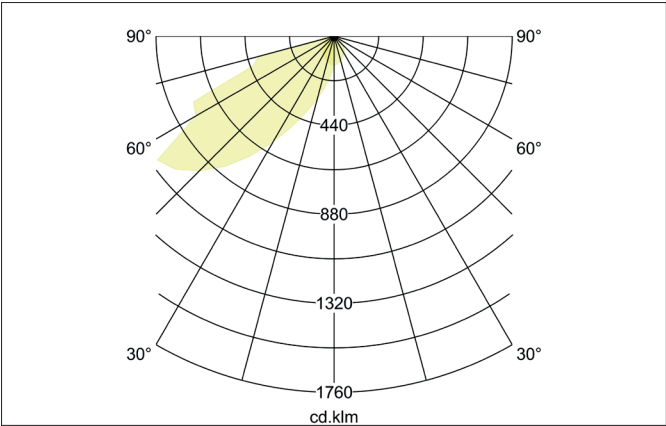

CARDUI LED wall recessed light, IP65
Article no. 60208183

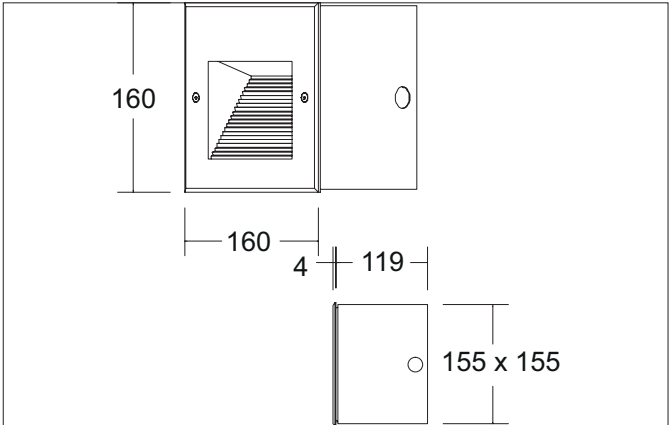

Tender
LED wall recessed light, IP65, Rectangular. Ceiling cut-out L x W 155 x 155 mm, Installation depth 119 mm, Length 160 mm, Width 160 mm, Weight 0,77 kg, with rotationssymmetrical, deep, wide distributed light intensity. Luminous flux 100 lm, Power 1 x 2 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Plastic, Colour: black structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65. With electronic driver, on/off switchable.

Article data	
Article no.	60208183
GTIN	4250047781554
Series name	CARDUI
Short description	LED wall recessed light, IP65
Material	Aluminium / Plastic
Colour	black structure
Shape	Rectangular
Length	160 mm
Width	160 mm
Built-in length	155 mm
Built-in width	155 mm
Installation depth	119 mm
Hight	4 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, switchable and wall-mounted housing
Weight	0.77 kg
Conformance	CE, UKCA


CARDUI LED wall recessed light, IP65

Article no. 60208183

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct
Luminous flux	100 lm
System efficiency	50 lm/W
Colour rendering	CRI > 80
Reflector	Matt
Beam angle	62°
Beam angle	42°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	2 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP65
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Energy efficiency class	not required

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Suitable for through-wiring	No

Packing data	
Gross weight	2.02 kg
Length of packaging	190 mm
Packaging width	180 mm
Packaging height	150 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.