



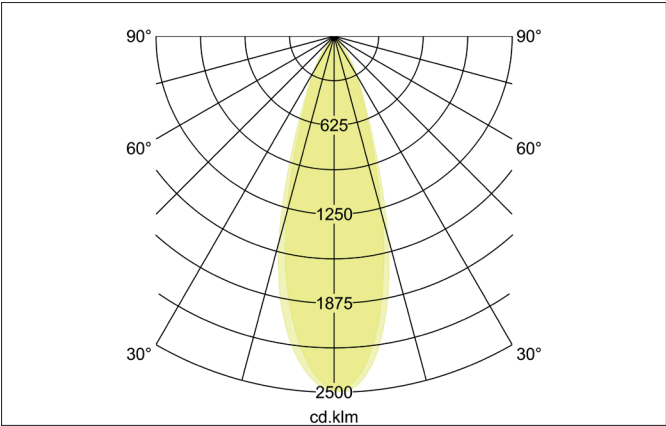

BLOKK LED ceiling surface-mounted luminaire, IP65
Article no. 60115103

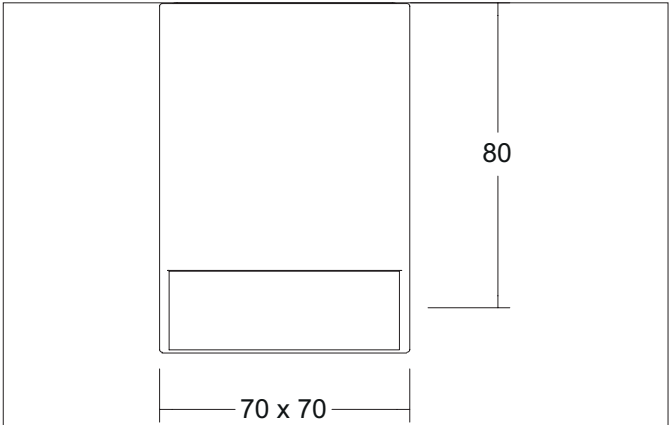

Tender
LED ceiling surface-mounted luminaire, IP65, Square. Luminaire length 70.0 mm, Luminaire width 70.0 mm, Hight 80.0 mm Weight 0.575 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover glass transparent Luminous flux 635 lm, Power 1 x 9 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Glass, Colour: graphite structure, Permissible ambient temperature (ta): -20 °C up to +45 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65. With electronic driver, on/off switchable.

Article data	
Article no.	60115103
GTIN	4251433925552
Series name	BLOKK
Short description	LED ceiling surface-mounted luminaire, IP65
Material	Aluminium / Glass
Colour	graphite structure
RAL colour	7016
Type of surface	Structure
Shape	Square
Length	70 mm
Width	70 mm
Hight	80 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage
Weight	0.575 kg
D licence plate	No
Conformance	CE, UKCA


BLOKK LED ceiling surface-mounted luminaire, IP65

Article no. 60115103

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct
Luminous flux	635 lm
System efficiency	64 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Beam angle	34°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	10 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP65
Ambient temperature	-20°C up to +45°C
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Energy efficiency class	not required

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Further references	Outdoor
Cover	Glass transparent
Suitable for through-wiring	No

Packing data	
Gross weight	0.625 kg
Length of packaging	80 mm
Packaging width	80 mm
Packaging height	105 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.