




INO LED wall surface mounted luminaire, IP54
Article no. 65121103

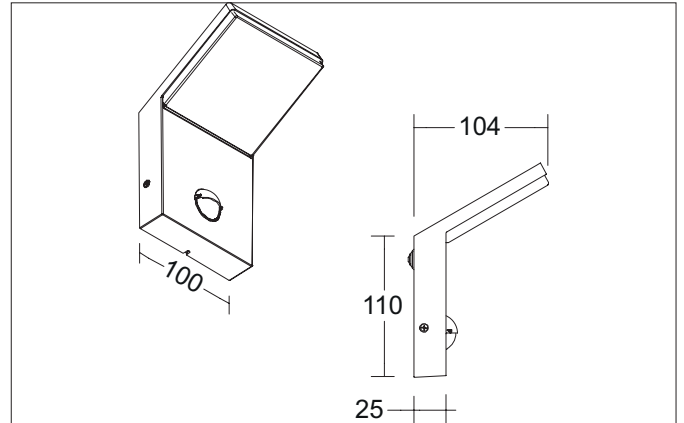

Tender

LED wall surface mounted luminaire, IP54, Rectangular. Luminaire length 104.0 mm, Luminaire width 100.0 mm, Height 105.0 mm Weight 0.415 kg, Luminous flux 680 lm, Power 1 x 7,9 W, Light colour warm white to warm white, Correlated color temperature (CCT) 3.000 - 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Polycarbonate, Colour: graphite structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP54. With electronic driver, on/off switchable.

Product Benefits

Motion detector:
Light duration: from 8 seconds to 8 minutes
Range: from 6 to 10 meters
Detection angle: 120
Twilight setting: 20 - 2,000 lux
Function mode: on / off, light turns off completely after movement


INO LED wall surface mounted luminaire, IP54

Article no. 65121103

Article data	
Article no.	65121103
GTIN	4251433982807
Series name	INO
Short description	LED wall surface mounted luminaire, IP54
Material	Aluminium / Polycarbonate
Colour	graphite structure
Type of surface	Structure
Shape	Rectangular
Length	104 mm
Width	100 mm
Hight	105 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, switchable, with motion detector and twilight switch
Weight	0.415 kg
D licence plate	No
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct
Luminous flux	680 lm
System efficiency	86 lm/W
McAdam-Step	McAdam-Step 6
Colour rendering	CRI > 80
Beam angle	120°
Adjustable color temperature	No

Operating technology of the luminaire	
System output	7.9 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP54
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Energy efficiency class	not required

Mounting technology	
Mounting method	Surface mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Further references	Outdoor
Suitable for through-wiring	No



INO LED wall surface mounted luminaire, IP54
Article no. 65121103

Packing data	
Gross weight	0.493 kg
Length of packaging	200 mm
Packaging width	85 mm
Packaging hight	120 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.