



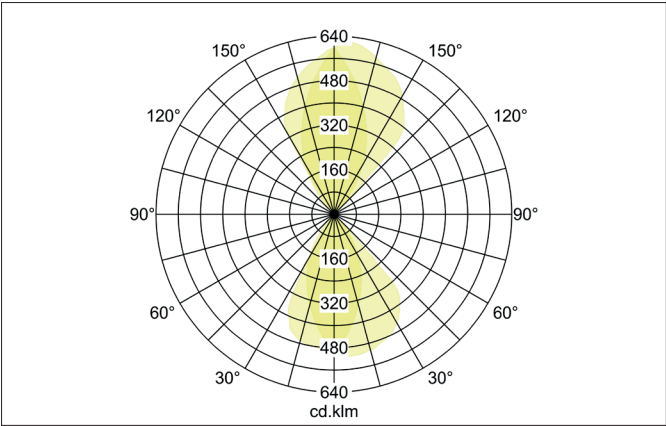

CLIQ LED wall surface mounted luminaire, IP65
Article no. 60127253

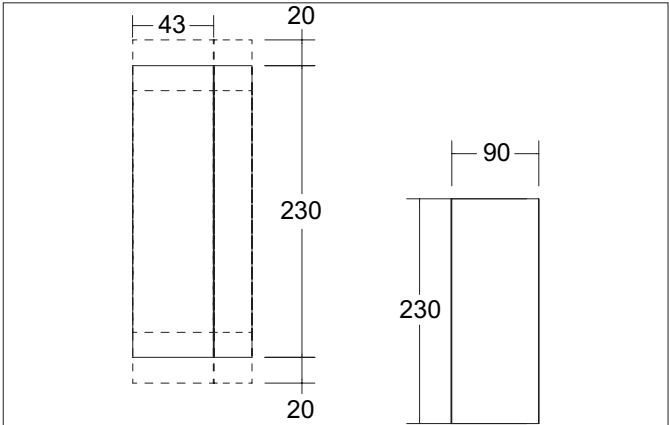

Tender
LED wall surface mounted luminaire, IP65, Rectangular. Luminaire length 90.0 mm, Luminaire width 43.0 mm, Height 230.0 mm Weight 0.915 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover glass transparent Luminous flux 790 lm, Power 2 x 4,6 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 90, Housing material: Aluminium / Glass, Colour: aluminum matt, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65 when installing in closed ceilings. With electronic driver, on/off switchable.

Article data	
Article no.	60127253
GTIN	4251433950134
Series name	CLIQ
Short description	LED wall surface mounted luminaire, IP65
Material	Aluminium / Glass
Colour	aluminum matt
Type of surface	Matt
Shape	Rectangular
Length	90 mm
Width	43 mm
Height	230 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, switchable
Weight	0.915 kg
D licence plate	No
Conformance	CE, UKCA


CLIQ LED wall surface mounted luminaire, IP65

Article no. 60127253

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct/Indirect
Luminous flux	790 lm
System efficiency	86 lm/W
Colour rendering	CRI > 90
Reflector	High-gloss
Beam angle	50°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	9.2 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP65
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Energy efficiency class	not required

Mounting technology	
Mounting method	Surface mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Cover	Glass transparent
Suitable for through-wiring	Yes

Packing data	
Gross weight	1.052 kg
Length of packaging	260 mm
Packaging width	120 mm
Packaging height	115 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.