
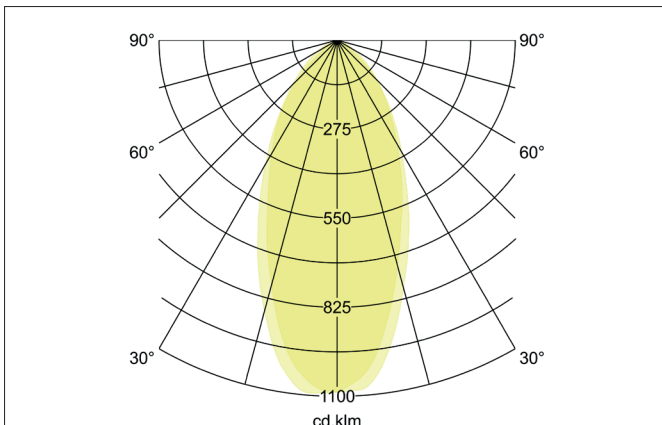
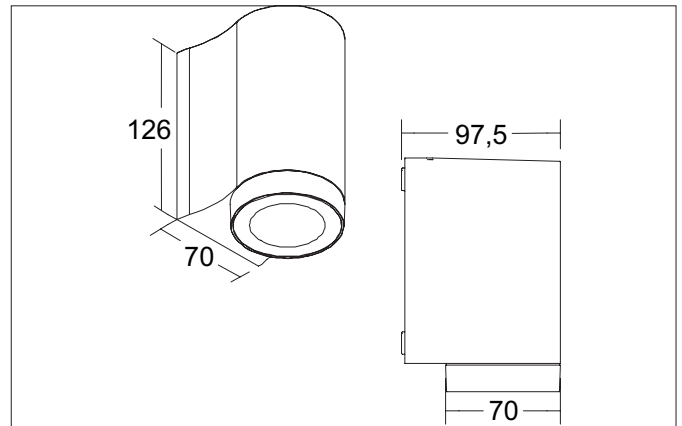



YLIP LED surface-mounted wall light, IP65, 3CCT, switchable

Article no. 10130183


Tender

LED surface-mounted wall light, IP65, 3CCT, switchable, Oval., Hight 126.0 mm Weight 0.77 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover glass transparent Luminous flux 670 - 800 lm, Power 1 x 8 W, Light colour warm white to daylight white, Cor-related color temprature (CCT) 3.000 - 5.700 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Glass, Colour: black structure, Permissible ambient temperature (ta): -20 °C up to +45 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65, shock resistance according to IEC62262: IK06 .With electronic driver, on/off switchable.

Article data	
Article no.	10130183
GTIN	4251433971801
Series name	YLIP
Short description	LED surface-mounted wall light, IP65, 3CCT, switchable
Material	Aluminium / Glass
Colour	black structure
RAL colour	9005
Type of surface	Structure
Shape	Oval
Outer diameter	70 mm
Length	97.5 mm
Hight	126 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, switchable
Weight	0.77 kg
D licence plate	No
Conformance	CE, UKCA


YLIP LED surface-mounted wall light, IP65, 3CCT, switchable

Article no. 10130183

Lighting technology	
Colour temperature	3.000 K / 4.000 K / 5.700 K
Light colour	white
Color Temperature 1	3,000 K
Color Temperature 2	4,000 K
Color Temperature 3	5,700 K
Light output	Direct
Luminous flux	670 - 800 lm
Luminous flux 1	670 lm
Luminous flux 2	800 lm
Luminous flux 3	700 lm
System efficiency	100 lm/W
Colour rendering	CRI > 80
Luminaire optics	Lens
Reflector	Without
Beam angle	45°
Light sharing	Symmetric
Adjustable color temperature	Stages

Operating technology of the luminaire	
System output	8 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP65
Ambient temperature	-20°C up to +45°C
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	not required

Mounting technology	
Mounting method	Surface mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Impact resistance	IK06
Cover	Glass transparent
Suitable for through-wiring	Yes

Packing data	
Gross weight	0.895 kg
Length of packaging	178 mm
Packaging width	105 mm
Packaging height	135 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.