




LED driver 24V DC, switchable
Article no. 17228000

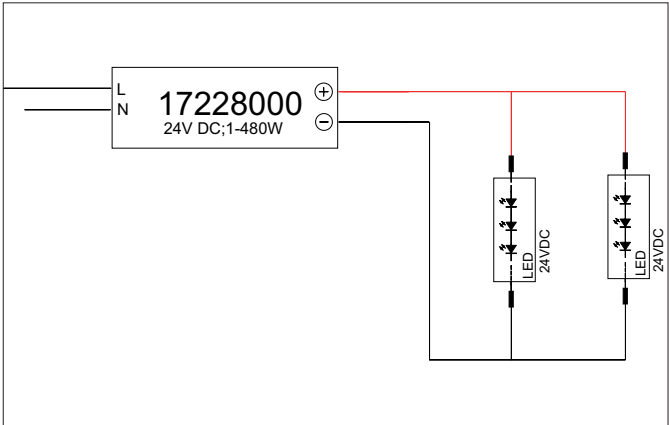

Tender	
LED driver 24V DC, switchable, silver, Rectangular. Material: Aluminium, Degree of protection: according to DIN EN 60529 IP65, Protection class: (EN 61140) I, Voltage: 24V DC, Power: 480 W, Dimmable: No, Type of dimming: on/off.	

Article data	
Article no.	17228000
GTIN	4251433954767
Short description	LED driver 24V DC, switchable
Material	Aluminium
Colour	silver
Shape	Rectangular
Length	262 mm
Width	125 mm
Hight	44 mm
Weight	2.617 kg
Length of the connection line	300 mm
stamp	ENEC 05
Conformance	CE


LED driver 24V DC, switchable

Article no. 17228000

Operating technology of driver	
AC nominal voltage min	90 V
AC nominal voltage max	305 V
Frequency min	47 Hz
Frequency max	63 Hz
DC nominal voltage min	127 V
DC nominal voltage max	431 V
Protection class	I
Degree of protection	IP65
Power	1 W
Power max.	480 W
Output_ripple_current	200
Starting current	35 A, 1.800 µs
Suitable for emergency lighting	No
measure point (tc)	90 °C
Power factor	0.97
max. no. lights on B16 A	2
max. no. lights on C16 A	3
Output voltage max	25.20 V
Output voltage min.	20.40 V
Control	on/off
Connection type-primary	Cable
Connection type-secondary	Open ends
Number of poles	3
Environment temperature (ta)	0 °C up to +40 °C
Measure point (tc)	max. +90 °C
Average nominal lifespan	100000 h
Output current	20 A mA
Length of the connection line	300 mm

Packing data	
Gross weight	2.752 kg
Length of packaging	365 mm
Packaging width	140 mm
Packaging height	70 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.