




LED converter 350 mA, on/off switchable
Article no. 17613000

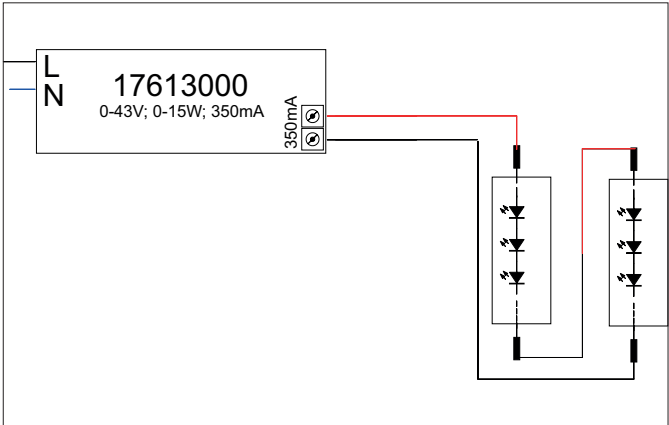

Tender	
LED converter 350 mA, on/off switchable, white, Rectangular. Material: Plastic, Degree of protection: (DIN EN 60529) IP20, Protection class: (DIN EN 61140) II, Voltage: 230V AC 50Hz, Power: 15 W, Dimmable: No, Type of dimming: on/off.	

Article data	
Article no.	17613000
GTIN	4250047778721
Short description	LED converter 350 mA, on/off switchable
Material	Plastic
Colour	white
Shape	Rectangular
Length	115 mm
Width	34 mm
Hight	19 mm
Scope of delivery	Plug&Play output cable, length 110 mm
Weight	0.07 kg
stamp	ENEC 05, EL
Conformance	CE, UKCA


LED converter 350 mA, on/off switchable

Article no. 17613000

Operating technology of driver	
AC nominal voltage min	90 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
DC nominal voltage min	176 V
DC nominal voltage max	275 V
Protection class	II
Degree of protection	IP20
Power min.	1 W
Power max.	15 W
Starting current	27 A, 250 µs
Suitable for emergency lighting	Yes
Ambient temperature	-25 up to 45 °C
measure point (tc)	75 °C
Version	Plug&Play
max. no. lights on B16 A	27
Flicker value Pst LM	1.00
Control	on/off
Number of poles	2
Environment temperature (ta)	-25 °C bis +45 °C
Measure point (tc)	max. +70 °C
Output current up to	350 mA

Packing data	
Gross weight	0.089 kg
Length of packaging	60 mm
Packaging width	27 mm
Packaging height	150 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.