




**LED converter 350 mA, on/off switchable**  
Article no. 17613020

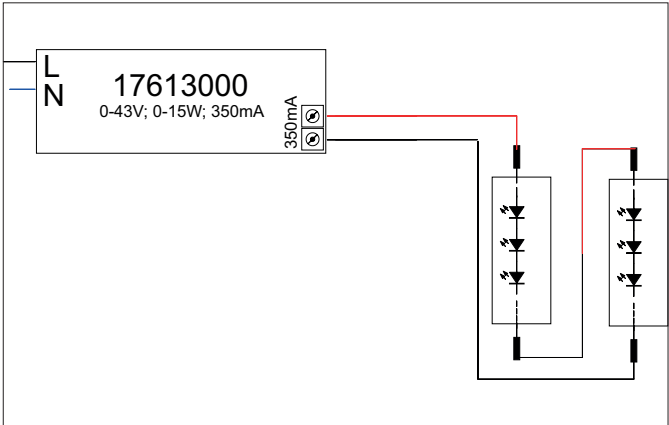

| Tender                                                                                                                                                                                                                                     |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| LED converter 350 mA, on/off switchable, white, Rectangular. Material: Plastic, Degree of protection: (DIN EN 60529) IP20, Protection class: (DIN EN 61140) II, Voltage: 230V AC 50Hz, Power: 15 W, Dimmable: No, Type of dimming: on/off. |  |

| Article data      |                                                          |
|-------------------|----------------------------------------------------------|
| Article no.       | 17613020                                                 |
| GTIN              | 4251433918530                                            |
| Short description | LED converter 350 mA, on/off switchable                  |
| Material          | Plastic                                                  |
| Colour            | white                                                    |
| Shape             | Rectangular                                              |
| Length            | 115 mm                                                   |
| Width             | 34 mm                                                    |
| Hight             | 19 mm                                                    |
| Scope of delivery | Plug&Play output cable, length 110 mm and connection box |
| Weight            | 0.102 kg                                                 |
| stamp             | ENEC 05, EL                                              |
| Conformance       | CE, UKCA                                                 |


**LED converter 350 mA, on/off switchable**

Article no. 17613020

| Operating technology of driver  |                              |
|---------------------------------|------------------------------|
| AC nominal voltage min          | 90 V                         |
| AC nominal voltage max          | 264 V                        |
| Frequency min                   | 47 Hz                        |
| Frequency max                   | 63 Hz                        |
| DC nominal voltage min          | 176 V                        |
| DC nominal voltage max          | 275 V                        |
| Protection class                | II                           |
| Degree of protection            | IP20                         |
| Power min.                      | 1 W                          |
| Power max.                      | 15 W                         |
| Starting current                | 27 A, 250 µs                 |
| Suitable for emergency lighting | Yes                          |
| Ambient temperature             | -25 up to 45 °C              |
| measure point (tc)              | 75 °C                        |
| Version                         | Plug & Play + Connection Box |
| max. no. lights on B16 A        | 27                           |
| Flicker value Pst LM            | 1.00                         |
| Control                         | on/off                       |
| Number of poles                 | 2                            |
| Environment temperature (ta)    | -25 °C bis +45 °C            |
| Measure point (tc)              | max. +75 °C                  |
| Output current up to            | 350 mA                       |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.162 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 100 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 100 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging height        | 100 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |