




**LED-round converter 350 mA, trailing-edge phase dimmer**  
Article no. 17652020

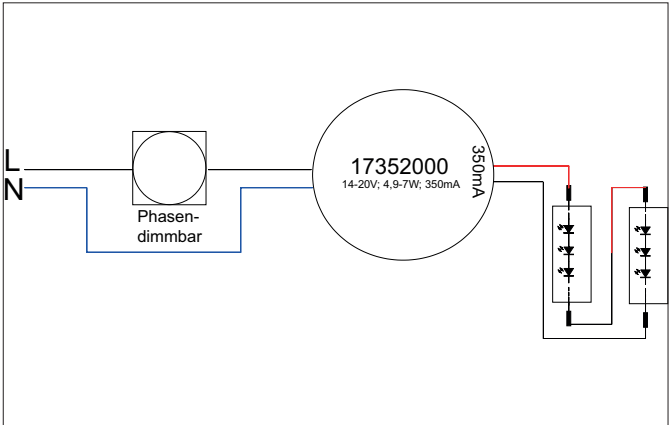

|                                                                                                                                                                                                                                                                                          |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>Tender</b>                                                                                                                                                                                                                                                                            |  |
| LED-round converter 350 mA, trailing-edge phase dimmer, white, Round. Lamp holder: Plug&Play, Material: Plastic, Degree of protection: (DIN EN 60529) IP20, Protection class: (DIN EN 61140) II, Voltage: 230V AC 50Hz, Power: 7 W, Dimmable: Yes, Type of dimming: Trailing-edge phase. |  |

| Article data                  |                                                        |
|-------------------------------|--------------------------------------------------------|
| Article no.                   | 17652020                                               |
| GTIN                          | 4251433918707                                          |
| Short description             | LED-round converter 350 mA, trailing-edge phase dimmer |
| Material                      | Plastic                                                |
| Colour                        | white                                                  |
| Shape                         | Round                                                  |
| Outer diameter                | 51 mm                                                  |
| Hight                         | 24 mm                                                  |
| Scope of delivery             | Plug&Play output cable, length 110 mm P&P_Output cable |
| Weight                        | 0.087 kg                                               |
| Length of the connection line | 110 mm                                                 |
| Conformance                   | CE                                                     |


**LED-round converter 350 mA, trailing-edge phase dimmer**

Article no. 17652020

| Operating technology of driver  |                              |
|---------------------------------|------------------------------|
| AC nominal voltage min          | 200 V                        |
| AC nominal voltage max          | 264 V                        |
| Frequency min                   | 47 Hz                        |
| Frequency max                   | 63 Hz                        |
| Protection class                | II                           |
| Degree of protection            | IP20                         |
| Power min.                      | 4.9 W                        |
| Power max.                      | 7 W                          |
| Starting current                | 3 A, 100 µs                  |
| Suitable for emergency lighting | No                           |
| Ambient temperature             | -20 up to 50 °C              |
| measure point (tc)              | 85 °C                        |
| Version                         | Plug & Play + Connection Box |
| Power factor                    | 0.5                          |
| Control                         | Trailing-edge phase          |
| Connection type-primary         | Connection box               |
| Connection type-secondary       | Plug&Play                    |
| Number of poles                 | 2                            |
| Flicker-free                    | Yes                          |
| Environment temperature (ta)    | -20 °C bis +50 °C            |
| Measure point (tc)              | max. +70 °C                  |
| Average nominal lifespan        | 30,000 h                     |
| Output current up to            | 350 mA                       |
| Length of the connection line   | 110 mm                       |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.124 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 95 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging width         | 75 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height        | 95 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |