




LED converter 350 mA, on/off switchable
Article no. 17662000

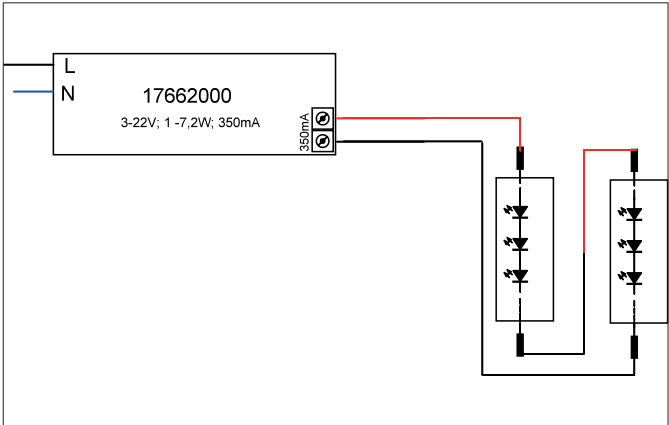

Tender	
LED converter 350 mA, on/off switchable, black, Rectangular. Material: Plastic, Degree of protection: (DIN EN 60529) IP20, Protection class: (DIN EN 61140) II, Voltage: 230V AC 50Hz, Power: 7,2 W, Dimmable: No, Type of dimming: on/off.	

Article data	
Article no.	17662000
GTIN	4251433918387
Short description	LED converter 350 mA, on/off switchable
Material	Plastic
Colour	black
Shape	Rectangular
Length	68 mm
Width	35 mm
Hight	21 mm
Scope of delivery	Plug&Play output cable, length 110 mm P&P output cable
Weight	0.043 kg
stamp	ENEC 18
Conformance	CE


LED converter 350 mA, on/off switchable

Article no. 17662000

Operating technology of driver	
AC nominal voltage min	90 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
Protection class	II
Degree of protection	IP20
Power min.	1 W
Power max.	7.2 W
Output_ripple_current	50
Starting current	40 A, 50 µs
Suitable for emergency lighting	No
Ambient temperature	-20 up to 50 °C
measure point (tc)	75 °C
Version	Plug&Play
Power factor	0.4
Control	on/off
Number of poles	2
Flicker-free	Yes
Environment temperature (ta)	-20 °C bis +45 °C
Measure point (tc)	max. +70 °C
Average nominal lifespan	35,000 h
Output current up to	350 mA

Packing data	
Gross weight	0.057 kg
Length of packaging	45 mm
Packaging width	40 mm
Packaging height	80 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.