




LED converter 350 mA, trailing-edge phase dimmable
Article no. 17663020

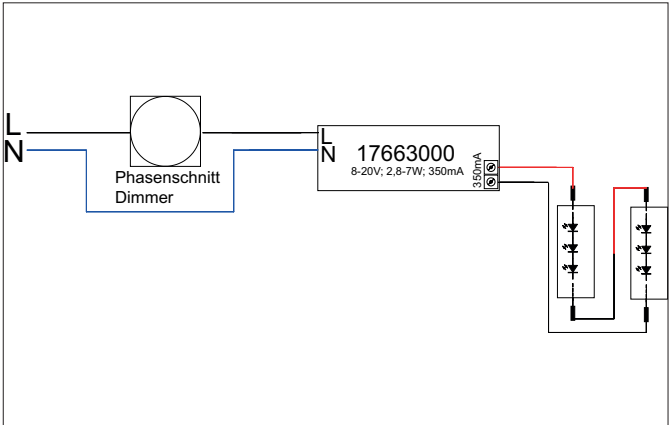

Tender
LED converter 350 mA, trailing-edge phase dimmable, white, Rectangular. Material: Plastic, Degree of protection: (DIN EN 60529) IP20, Protection class: (DIN EN 6 1140) II, Voltage: 230V AC 50Hz, Power: 7 W, Dimmable: Yes, Type of dimming: Trailing-edge phase.

Article data	
Article no.	17663020
GTIN	4251433918448
Short description	LED converter 350 mA, trailing-edge phase dimmable
Material	Plastic
Colour	white
Shape	Rectangular
Length	110 mm
Width	50 mm
Hight	19 mm
Scope of delivery	Plug&Play output cable, length 110 mm P&P_Output cable
Weight	0.09 kg
stamp	ENEC 05
Conformance	CE


LED converter 350 mA, trailing-edge phase dimmable

Article no. 17663020

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
Protection class	II
Degree of protection	IP20
Power min.	2.8 W
Power max.	7 W
Output_ripple_current	20
Starting current	1 A, 15,2 µs
Suitable for emergency lighting	No
Ambient temperature	-20 up to 50 °C
measure point (tc)	70 °C
Version	Plug & Play + Connection Box
Power factor	0.9
max. no. lights on B16 A	250
Flicker value Pst LM	1.00
Control	Trailing-edge phase
Number of poles	2
Flicker-free	Yes
Environment temperature (ta)	-20 °C bis +50 °C
Measure point (tc)	max. +70 °C
Average nominal lifespan	50,000 h
Output current up to	350 mA
Efficiency	0.78 %

Packing data	
Gross weight	0.13 kg
Length of packaging	95 mm
Packaging width	75 mm
Packaging height	95 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.