



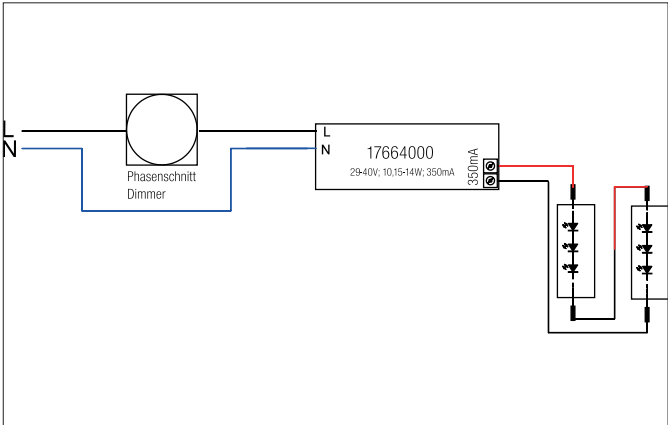

**LED converter 350 mA, trailing-edge phase dimmable**  
Article no. 17664000

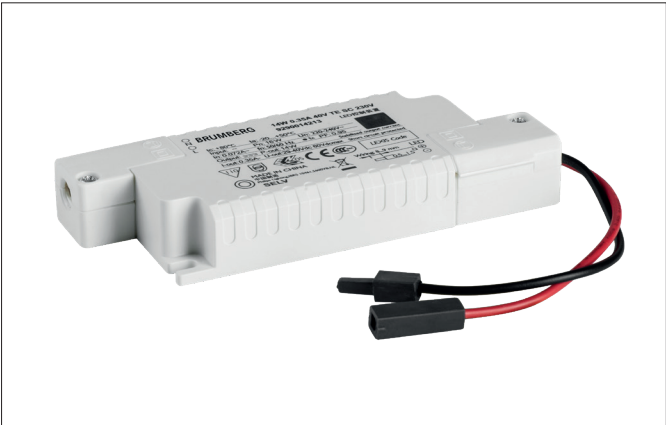

**Tender**  
LED converter 350 mA, trailing-edge phase dimmable, white, Rectangular. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 14 W, Dimmable: Yes, Type of dimming: Trailing-edge phase.

| Article data      |                                                    |
|-------------------|----------------------------------------------------|
| Article no.       | 17664000                                           |
| GTIN              | 4251433919483                                      |
| Short description | LED converter 350 mA, trailing-edge phase dimmable |
| Material          | Plastic                                            |
| Colour            | white                                              |
| Shape             | Rectangular                                        |
| Length            | 125 mm                                             |
| Width             | 51 mm                                              |
| Hight             | 20 mm                                              |
| Scope of delivery | Plug&Play-Ausgangsleitung, Länge 110 mm            |
| Weight            | 0.07 kg                                            |
| stamp             | ENEC 05                                            |
| Conformance       | CE                                                 |


**LED converter 350 mA, trailing-edge phase dimmable**

Article no. 17664000

| Operating technology of driver  |                     |
|---------------------------------|---------------------|
| AC nominal voltage min          | 198 V               |
| AC nominal voltage max          | 264 V               |
| Frequency min                   | 47 Hz               |
| Frequency max                   | 63 Hz               |
| Protection class                | II                  |
| Degree of protection            | IP20                |
| Power                           | 10.2 W              |
| Power max.                      | 14 W                |
| Output_ripple_current           | 15                  |
| Starting current                | 1.87 A, 48 µs       |
| Suitable for emergency lighting | No                  |
| measure point (tc)              | 80 °C               |
| Version                         | Plug&Play           |
| Power factor                    | 0.9                 |
| max. no. lights on B16 A        | 155                 |
| Output voltage max              | 40.00 V             |
| Output voltage min.             | 29.00 V             |
| Control                         | Trailing-edge phase |
| Number of poles                 | 2                   |
| Environment temperature (ta)    | -20°C up to +50°C   |
| Measure point (tc)              | max. +80 °C         |
| Average nominal lifespan        | 50000 h             |
| Output current                  | 350 mA              |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.095 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 60 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging width         | 30 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height        | 165 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |