




LED converter 350 mA, trailing-edge phase dimmable
Article no. 17664020

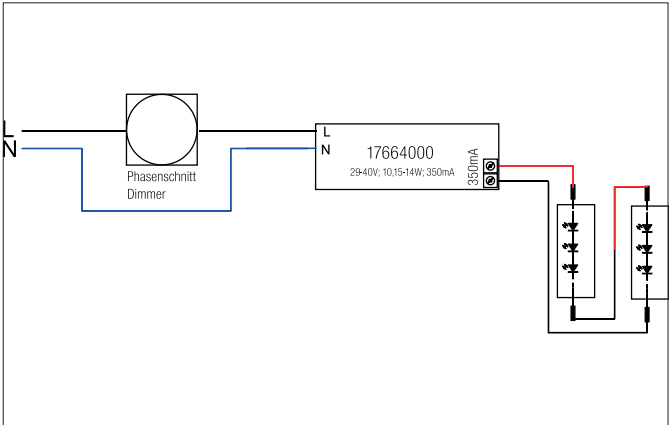

Tender
LED converter 350 mA, trailing-edge phase dimmable, white, Rectangular. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 14 W, Dimmable: Yes, Type of dimming: Trailing-edge phase.

Article data	
Article no.	17664020
GTIN	4251433919506
Short description	LED converter 350 mA, trailing-edge phase dimmable
Material	Plastic
Colour	white
Shape	Rectangular
Length	125 mm
Width	51 mm
Hight	20 mm
Scope of delivery	Plug&Play-Ausgangsleitung, Länge 110 mm und Anschlussbox
Weight	0.11 kg
stamp	ENEC 05
Conformance	CE


LED converter 350 mA, trailing-edge phase dimmable

Article no. 17664020

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
Protection class	II
Degree of protection	IP20
Power	10.2 W
Power max.	14 W
Output_ripple_current	15
Starting current	1.87 A, 48 µs
Suitable for emergency lighting	No
measure point (tc)	80 °C
Version	Plug&Play + connection box
Power factor	0.9
max. no. lights on B16 A	155
Output voltage max	40.00 V
Output voltage min.	29.00 V
Control	Trailing-edge phase
Number of poles	2
Enviroment temprature (ta)	-20°C up to +50°C
Measure point (tc)	max. +80 °C
Average nominal lifespan	50000 h
Output current	350 mA

Packing data	
Gross weight	0.16 kg
Length of packaging	100 mm
Packaging width	60 mm
Packaging hight	100 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.