




LED converter 350 mA, 1-10 V dimmable (analog)
Article no. 17657000

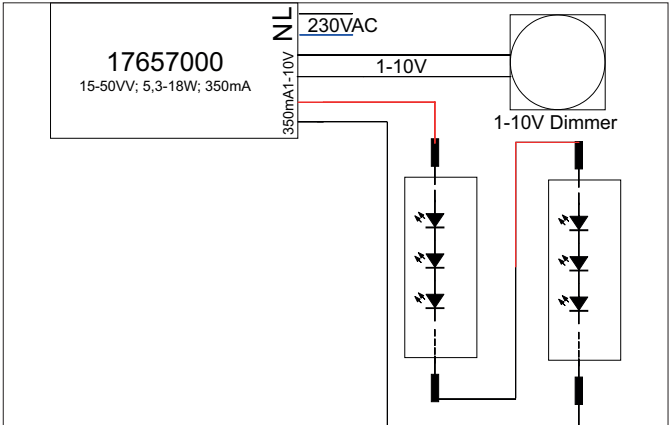

Tender
LED converter 350 mA, 1-10 V dimmable (analog), white, Rectangular. Material: Plastic, Degree of protection: (DIN EN 60529) IP20, Protection class: (DIN EN 61140) II, Voltage: 230V AC 50Hz , Power: 18 W, Dimmable: Yes, Type of dimming: 1-10 V.

Article data	
Article no.	17657000
GTIN	4251433923954
Short description	LED converter 350 mA, 1-10 V dimmable (analog)
Material	Plastic
Colour	white
Shape	Rectangular
Length	110 mm
Width	52 mm
Hight	22 mm
Scope of delivery	Plug&Play output cable, length 110 mm P&P output cable
Weight	0.112 kg
stamp	ENEC 05, EL
Conformance	CE


LED converter 350 mA, 1-10 V dimmable (analog)

Article no. 17657000

Operating technology of driver	
AC nominal voltage min	99 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
DC nominal voltage min	176 V
DC nominal voltage max	280 V
Protection class	II
Degree of protection	IP20
Power min.	5.2 W
Power max.	18 W
Output_ripple_current	3
Starting current	5 A, 50 µs
Suitable for emergency lighting	No
Ambient temperature	-25 up to 50 °C
measure point (tc)	80 °C
Version	Plug&Play
Power factor	0.95
max. no. lights on B16 A	50
Flicker value Pst LM	1.00
Control	1-10 V
Number of poles	4
Environment temperature (ta)	-25 °C bis +50 °C
Measure point (tc)	max. +80 °C
Output current up to	350 mA
Safety devices against thermal overload	yes

Packing data	
Gross weight	0.131 kg
Length of packaging	60 mm
Packaging width	27 mm
Packaging height	150 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.