




**LED converter 700 mA, DALI dimmable, (digital)**  
Article no. 17783010

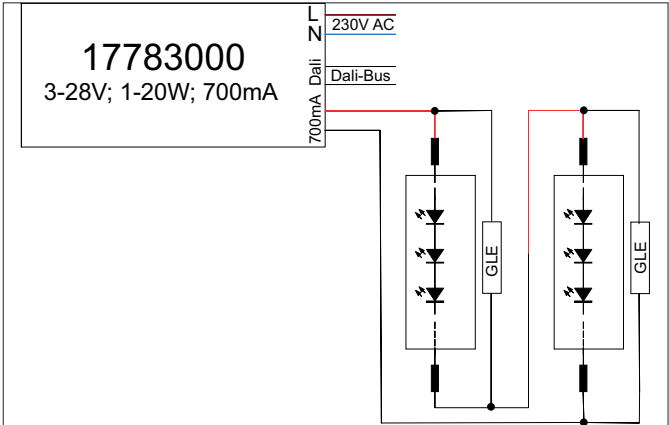

**Tender**  
LED converter 700 mA, DALI dimmable, (digital), white, Rectangular. Material: Plastic, Degree of protection: (DIN EN 60529) IP20, Protection class: (DIN EN 61140) II, Voltage: 230V AC 50Hz , Power: 20 W, Dimmable: Yes, Type of dimming: DALI-2.

| Article data      |                                                |
|-------------------|------------------------------------------------|
| Article no.       | 17783010                                       |
| GTIN              | 4251433924159                                  |
| Short description | LED converter 700 mA, DALI dimmable, (digital) |
| Material          | Plastic                                        |
| Colour            | white                                          |
| Shape             | Rectangular                                    |
| Length            | 110.5 mm                                       |
| Width             | 52 mm                                          |
| Hight             | 22 mm                                          |
| Weight            | 0.107 kg                                       |
| stamp             | ENEC 05, EL                                    |
| Conformance       | CE, UKCA                                       |


**LED converter 700 mA, DALI dimmable, (digital)**

Article no. 17783010

| Operating technology of driver          |                   |
|-----------------------------------------|-------------------|
| AC nominal voltage min                  | 99 V              |
| AC nominal voltage max                  | 264 V             |
| Frequency min                           | 47 Hz             |
| Frequency max                           | 63 Hz             |
| DC nominal voltage min                  | 176 V             |
| DC nominal voltage max                  | 280 V             |
| Protection class                        | II                |
| Degree of protection                    | IP20              |
| Power                                   | 2.1 W             |
| Power max.                              | 20 W              |
| Output_ripple_current                   | 3                 |
| Starting current                        | 5 A, 50 µs        |
| Suitable for emergency lighting         | No                |
| Ambient temperature                     | -25 up to 45 °C   |
| measure point (tc)                      | 75 °C             |
| Version                                 | without packaging |
| Power factor                            | 0.95              |
| Control                                 | DALI-2            |
| Number of poles                         | 4                 |
| Environment temperature (ta)            | -25 °C bis +45 °C |
| Measure point (tc)                      | max. +85 °C       |
| Output current up to                    | 700 mA            |
| Safety devices against thermal overload | yes               |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.127 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 60 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging width         | 27 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height        | 150 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |