




LED converter 350 mA, trailing-edge phase dimmable
Article no. 17648020

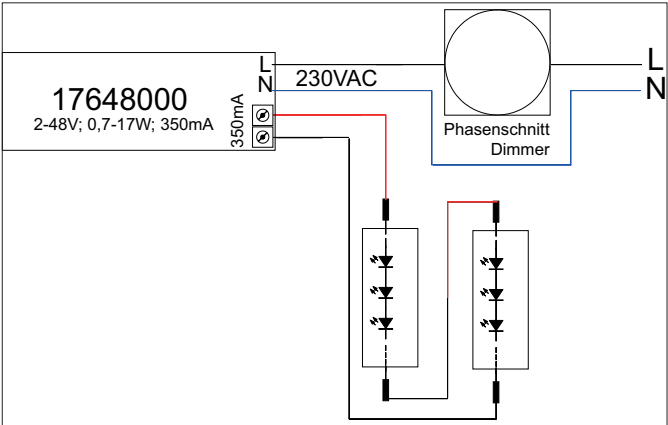

Tender
LED converter 350 mA, trailing-edge phase dimmable, white, Rectangular. Material: Plastic, Degree of protection: (DIN EN 60529) IP20, Protection class: (DIN EN 6 1140) II, Voltage: 230V AC 50Hz, Power: 17 W, Dimmable: Yes, Type of dimming: Trailing-edge phase.

Article data	
Article no.	17648020
GTIN	4251433924531
Short description	LED converter 350 mA, trailing-edge phase dimmable
Material	Plastic
Colour	white
Shape	Rectangular
Length	166 mm
Width	46 mm
Hight	34 mm
Scope of delivery	Plug&Play output cable, length 110 mm P&P output cable
Weight	0.211 kg
stamp	ENEC 05
Conformance	CE


LED converter 350 mA, trailing-edge phase dimmable

Article no. 17648020

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
Protection class	II
Degree of protection	IP20
Power min.	0.7 W
Power max.	17 W
Output_ripple_current	3
Starting current	5 A, 50 µs
Suitable for emergency lighting	No
Ambient temperature	-25 up to 50 °C
measure point (tc)	75 °C
Version	Plug & Play + Connection Box
Power factor	0.97
max. no. lights on B16 A	50
Control	Trailing-edge phase
Number of poles	2
Enviroment temprature (ta)	-25 °C bis +50 °C
Measure point (tc)	max. +75 °C
Output current up to	350 mA

Packing data	
Gross weight	0.277 kg
Length of packaging	140 mm
Packaging width	110 mm
Packaging hight	120 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.