




LED converter 350 mA, DALI dimmable (digital)
Article no. 17684020

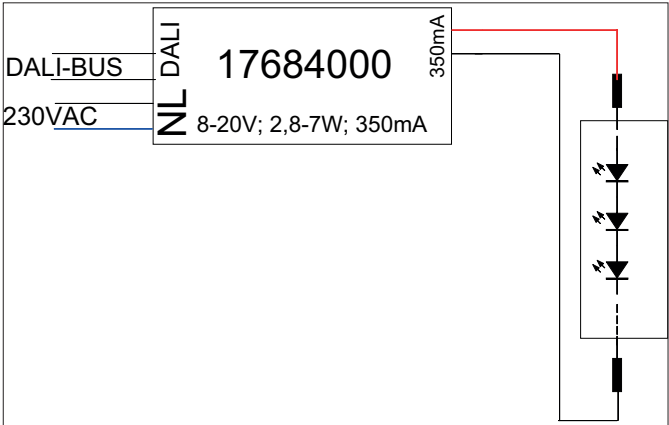

Tender
LED converter 350 mA, DALI dimmable (digital), white, Rectangular. Material: Plastic, Degree of protection: (DIN EN 60529) IP20, Protection class: (DIN EN 61140) II, Voltage: 230V AC 50Hz , Power: 7 W, Dimmable: Yes, Type of dimming: DALI-2/PUSH.

Product Benefits
We guarantee: No afterglow of the LEDs. A weak afterglow of the LED lights in the switched-off state is an undesirable, unacceptable effect. With our new LED converter, this is eliminated. This reduces troubleshooting as well as installation efforts and offers optimal operational reliability. The converter is available in three versions and additionally already integrated in the BB sets.

Article data	
Article no.	17684020
GTIN	4251433951209
Short description	LED converter 350 mA, DALI dimmable (digital)
Material	Plastic
Colour	white
Shape	Rectangular
Length	130 mm
Width	42 mm
Hight	22 mm
Scope of delivery	Plug&Play output cable, length 110 mm and connection box
Weight	0.104 kg
stamp	ENEC 05, EL
Conformance	CE


LED converter 350 mA, DALI dimmable (digital)

Article no. 17684020

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
DC nominal voltage min	186 V
DC nominal voltage max	250 V
Protection class	II
Degree of protection	IP20
Power min.	2.8 W
Power max.	7 W
Output_ripple_current	4
Starting current	1 A, 15,2 µs
Suitable for emergency lighting	No
Ambient temperature	-20 up to 50 °C
measure point (tc)	70 °C
Version	Plug & Play + Connection Box
Power factor	0.97
max. no. lights on B10 A	157
max. no. lights on B16 A	250
max. no. lights on C16 A	425
max. no. lights on C10 A	250
Flicker value Pst LM	1.00
Control	DALI-2/PUSH
Connection type-primary	Plug-in connection
Connection type-secondary	Plug clamp
Number of poles	2
Flicker-free	Yes
Environment temperature (ta)	-20 °C bis +50 °C
Measure point (tc)	max. +70 °C
Average nominal lifespan	50,000 h
Output current up to	350 mA
Safety devices against thermal overload	yes

Packing data	
Gross weight	0.164 kg
Length of packaging	140 mm
Packaging width	110 mm
Packaging height	120 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.