
32430

Busbar adapter 25A, with cables

CONNECT AND PROTECT

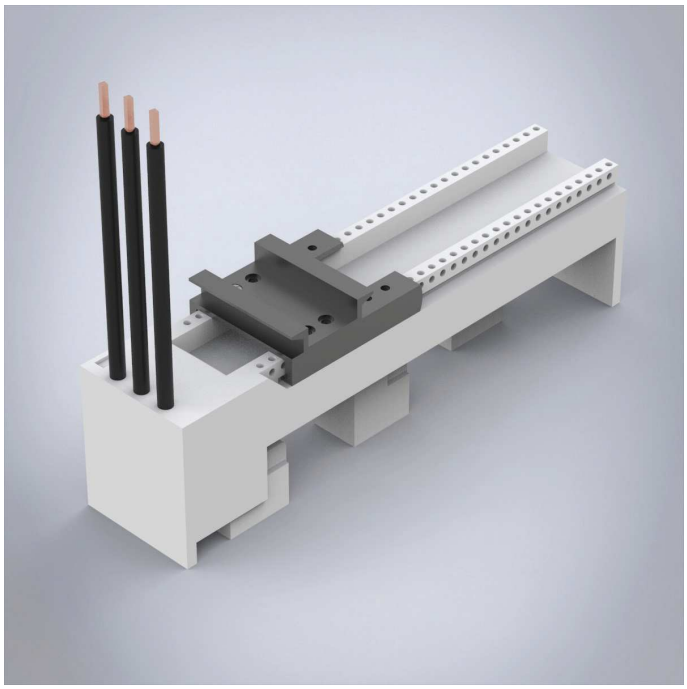

Description: Busbar adapter 25 A. With one adjustable mounting rail. With leads (4 mm²).

Rated voltage: 690 V

Rated current: 25 A

For busbars: 12, 15, 20, 25, 30 × 5, 10

Power dissipation at 80% load: 1.2 W

Poles: 3-pole

Dimensions: 45 × 200 × 63 mm

Pack quantity: 1 pc.

Approvals: CSA, UL, GL

Busbar adapter with one mounting rail, pre-fitted with cables 4 mm².