


SCHUKO Socket with USB
pure white

Product Data Sheet



Halogen free	Yes
Model	Other
Mounting method	Flush mounted (plaster)
Material	Plastic
Colour	White
Type of fastening	Mounting with screw
MP3	no
radio link	no
[CC00001_2]	70Millimetre
[CC00001_3]	70Millimetre
[CC00180_2]	30Millimetre

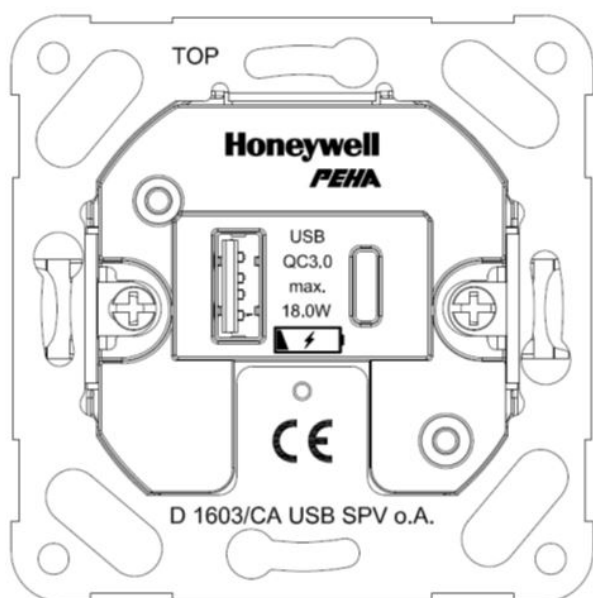

SCHUKO Socket with USB
pure white

SCHUKO socket with USB charger 3.4A, USB type A + C (QC3.0)
2-pole, 16A 250 V ~, with connection terminals according to VDE 0620,
with central plate for combinations, with 2 USB ports type A and type C for supplying and charging mobile devices.

Technical specifications:

Nominal voltage: AC 220... 250 V ~ Mains frequency: 50/60 Hz Rated

current socket: 16 A. Output current USB (total): 3.4 A USB type A operation (without USB type C):

USB output voltage DC 5V, charging current max.3A (max.15W) USB type C (QC3.0) operation (without USB type A):

USB output voltage DC 9V, charging current max.2A (max.18W) USB output voltage DC 12V, charging current max.1.5A (max.18W)

USB type A + C (parallel operation): USB output voltage DC 12V, charging current max.3.4A (max.17W) with charge current monitoring

Ambient temperature: 0°C to +35°C Storage / transport temperature: -10°C to +60°C

Connection type: plug-in terminal Single wire: 1.5... 2.5 mm²

Use of deep flush-mounted boxes recommended

Material No.	Article No.	EAN-code
00243951	D 6511.02 SI USB CA	4010105243956

PEHA Elektro GmbH & Co. KG

a Honeywell Company
Gartenstraße 49
58511 Lüdenscheid
Deutschland

Telefon +49 (0)2351 87979 00
Telefax +49 (0)2351 87979 92
peha@honeywell.com
www.peha.de

Änderungen vorbehalten. © Honeywell PEHA