



**RAHLE Recessed spot, GX5,3**  
Article no. 3207.07

Light.  
For Generations.

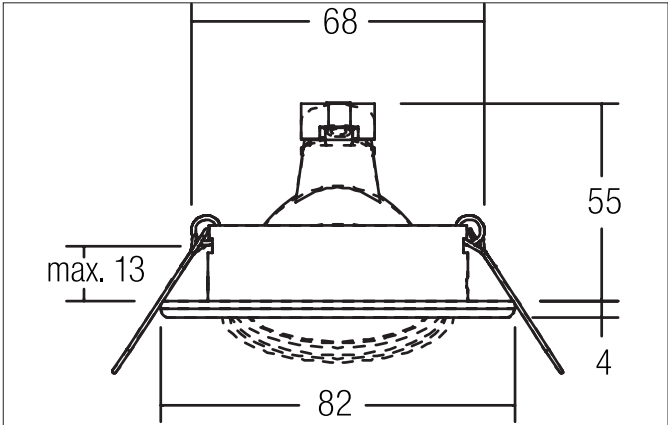

**Tender**  
Recessed spot, GX5,3, white, Round. In a compact design, for installation in tool-less rapid assembly systems. Lamp holder: GX5.3, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Steel / Brass, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Voltage: 12V, Power: 50 W, Amount of light sources / fittings: 1 Qty, Adjustability: Pivoted, without control gear, Control: Other.

| Article data       |                      |
|--------------------|----------------------|
| Article no.        | 3207.07              |
| GTIN               | 4250047723066        |
| Series name        | RAHLE                |
| Short description  | Recessed spot, GX5,3 |
| Material           | Aluminium / Glass    |
| Colour             | White                |
| Type of surface    | Glossy               |
| Shape              | Round                |
| Outer diameter     | 82 mm                |
| Built-in diameter  | 68 mm                |
| Installation depth | 55 mm                |
| Hight              | 4 mm                 |
| Weight             | 0.082 kg             |
| Conformance        | CE, UKCA             |

**RAHLE Recessed spot, GX5,3**

Article no. 3207.07

Light.  
For Generations.

| Operating technology of the luminaire |                        |
|---------------------------------------|------------------------|
| System output                         | 50 W                   |
| Voltage type                          | AC/DC                  |
| AC nominal voltage max                | 12 V                   |
| Frequency max                         | 50 Hz                  |
| Lamp                                  | For LED-retrofill lamp |
| Lamp holder                           | GX5.3                  |
| Protection class                      | III                    |
| Degree of protection                  | IP20                   |
| Control                               | Depending on driver    |
| Bulb change possible                  | Yes                    |

| Mounting technology   |                                           |
|-----------------------|-------------------------------------------|
| Mounting method       | Recessed mounting                         |
| Place of installation | Ceiling-mounted                           |
| Adjustability         | Pivoted                                   |
| Swivel angle          | 25°                                       |
| Further references    | No cover with thermal insulation material |
| Material cover        | Other                                     |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.102 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 85 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging width         | 43 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height        | 84 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |

**RAHLE Recessed spot, GX5,3**

Article no. 3207.07

Light.  
For Generations.

| Compatible LED-modules |        |            |                    |                  |               |         |               |
|------------------------|--------|------------|--------------------|------------------|---------------|---------|---------------|
| Article no.            | Power  | Beam angle | Colour temperature | Colour rendering | Luminous flux | Input   | Hight LED-dul |
| 12925003               | 3 W    | 38°        | 2.700 K            | CRI > 80         | 290 lm        | 350 mA  | 40 mm         |
| 12926003               | 3 W    | 38°        | 3.000 K            | CRI > 80         | 310 lm        | 350 mA  | 40 mm         |
| 12925004               | 3 W    | 38°        | 4.000 K            | CRI > 80         | 340 lm        | 350 mA  | 40 mm         |
| 12923003               | 6 W    | 38°        | 2.700 K            | CRI > 80         | 680 lm        | 350 mA  | 40 mm         |
| 12924003               | 6 W    | 38°        | 3.000 K            | CRI > 80         | 680 lm        | 350 mA  | 40 mm         |
| 12924004               | 6 W    | 38°        | 3.500 K            | CRI > 80         | 680 lm        | 350 mA  | 40 mm         |
| 12923004               | 6 W    | 38°        | 4.000 K            | CRI > 80         | 720 lm        | 350 mA  | 40 mm         |
| 12923383               | 6 W    | 38°        | 2.700 K            | CRI > 80         | 740 lm        | 350 mA  | 32 mm         |
| 12923603               | 6 W    | 60°        | 2.700 K            | CRI > 80         | 720 lm        | 350 mA  | 32 mm         |
| 12924383               | 6 W    | 38°        | 3.000 K            | CRI > 80         | 730 lm        | 350 mA  | 32 mm         |
| 12924603               | 6 W    | 60°        | 3.000 K            | CRI > 80         | 770 lm        | 350 mA  | 32 mm         |
| 12924384               | 6 W    | 38°        | 3.500 K            | CRI > 80         | 730 lm        | 350 mA  | 32 mm         |
| 12924604               | 6 W    | 60°        | 3.500 K            | CRI > 80         | 770 lm        | 350 mA  | 32 mm         |
| 12923384               | 6 W    | 38°        | 4.000 K            | CRI > 80         | 770 lm        | 350 mA  | 32 mm         |
| 12923604               | 6 W    | 60°        | 4.000 K            | CRI > 80         | 790 lm        | 350 mA  | 32 mm         |
| 12920183               | 6 W    | 18°        | 3.000 K            | CRI > 80         | 740 lm        | 350 mA  | 31 mm         |
| 12920243               | 6 W    | 24°        | 3.000 K            | CRI > 80         | 760 lm        | 350 mA  | 31 mm         |
| 12920003               | 6 W    | 38°        | 3.000 K            | CRI > 80         | 780 lm        | 350 mA  | 31 mm         |
| 12920603               | 6 W    | 60°        | 3.000 K            | CRI > 80         | 760 lm        | 350 mA  | 31 mm         |
| 12920184               | 6 W    | 18°        | 4.000 K            | CRI > 80         | 780 lm        | 350 mA  | 31 mm         |
| 12920244               | 6 W    | 24°        | 4.000 K            | CRI > 80         | 790 lm        | 350 mA  | 31 mm         |
| 12920004               | 6 W    | 38°        | 4.000 K            | CRI > 80         | 810 lm        | 350 mA  | 31 mm         |
| 12920604               | 6 W    | 60°        | 4.000 K            | CRI > 80         | 780 lm        | 350 mA  | 31 mm         |
| 12963003               | 6 W    | 38°        | 3.000 K - 1.800 K  | CRI > 90         | 460 lm        | 350 mA  | 40 mm         |
| 12963383               | 6 W    | 38°        | 3.000 K - 1.800 K  | CRI > 90         | 460 lm        | 350 mA  | 32 mm         |
| 12963603               | 6 W    | 60°        | 3.000 K - 1.800 K  | CRI > 90         | 460 lm        | 350 mA  | 32 mm         |
| 12953003               | 12 W   | 38°        | 2.700 K            | CRI > 80         | 1,130 lm      | 350 mA  | 70 mm         |
| 12954003               | 12 W   | 38°        | 3.000 K            | CRI > 80         | 1,360 lm      | 350 mA  | 70 mm         |
| 12954004               | 12 W   | 38°        | 3.500 K            | CRI > 80         | 1,290 lm      | 350 mA  | 70 mm         |
| 12953004               | 12 W   | 38°        | 4.000 K            | CRI > 80         | 1,300 lm      | 350 mA  | 70 mm         |
| 12965003               | 12 W   | 38°        | 3.000 K - 1.800 K  | CRI > 90         | 930 lm        | 350 mA  | 70 mm         |
| 12983003               | 12.5 W | 38°        | 3.000 K            | CRI > 97         | 920 lm        | 350 mA  | 95 mm         |
| 12823003               | 8 W    | 60°        | 2.850 K            | CRI > 90         | 900 lm        | 24.00 V | 50 mm         |
| 12843004               | 8 W    | 60°        | 2.000 K - 6.500 K  | CRI > 90         | 640 lm        | 24.00 V | 50 mm         |
| 18438002               | 8 W    | 60°        | RGB+WW             | CRI > 90         | 400 lm        | 24.00 V | 50 mm         |