


DATENBLATT

D-Sub Stecker 09pol. Schneid- Klemme, EDSF 09 LP III/Z UNC

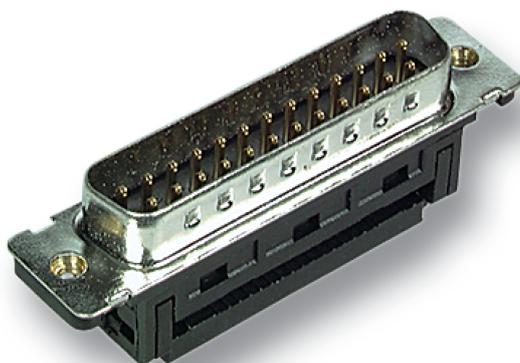

Beschreibung

Gütestufe III. UNC Gewinde. ≥ 50 Steckzyklen.

Allgemeine Daten

Ausführung | Stecker

General data

Anschlussart | sonstige

Electrical characteristics

Kontaktausführung | männlich (male)

Verfügbare Varianten

ArtNr.	Bezeichnung	Polzahl	Typ
29065.1	D-Sub Stecker 09pol. Schneid- Klemme, EDSF 09 LP III/Z UNC	9	EDSF 09 LP III/Z UNC
29067.1	D-Sub Stecker 25pol. Schneid- Klemme, EDSF 25 LP III/Z UNC	25	EDSF 25 LP III/Z UNC



Zeichnungen

Dieses Datenblatt wurde maschinell am 24-02-2025 erzeugt. Technische Änderungen vorbehalten.




DATENBLATT

D-Sub Stecker 09pol. Schneid- Klemme, EDSF 09 LPIII/Z UNC

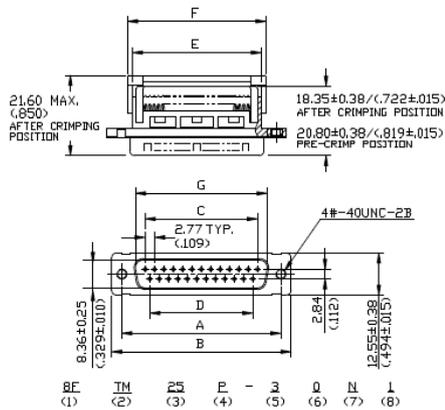

SPECIFICATION:
 CURRENT RATING: 1 AMP.
 INSULATOR RESISTANCE: 1000 MΩ MIN. (AT 500 V DC)
 DIELECTRIC WITHSTANDING VOLTAGE: AC 500 V MIN. (FOR 1 MINUTE)
 OPERATING TEMPERATURE: -55°C TO 105°C
 CONTACT RESISTANCE: 15mΩ MAX.
 INSULATOR MATERIAL: PBT WITH GLASS-FIBER REINFORCED UL 94V-0
 CONTACT MATERIAL: BRASS
 CONTACT PLATING: GOLD OVER NICKEL
 WIRE SIZE: AWG 26 & 28 STRANDED, 1.27mm CONDUCTOR CENTRE FLAT CABLE

8FTW37P	37	63.50(2.500)	69.40(2.732)	49.86(1.963)	47.09(1.854)	54.60(2.150)	57.10(2.248)
8FTW25P	25	47.04(1.852)	53.09(2.090)	33.24(1.309)	30.47(1.200)	38.14(1.502)	40.90(1.610)
8FTW15P	15	33.32(1.312)	39.10(1.539)	19.39(0.763)	16.62(0.654)	24.00(0.945)	26.60(1.047)
8FTW09P	9	24.99(0.984)	30.80(1.212)	11.08(0.436)	8.31(0.327)	16.10(0.634)	18.60(0.732)
CATALOG NO.	NO. OF POSITIONS	A ±0.13 (±0.005)	B ±0.25 (±0.010)	C ±0.13 (±0.005)	D ±0.13 (±0.005)	E ±0.25 (±0.010)	F ±0.25 (±0.010)

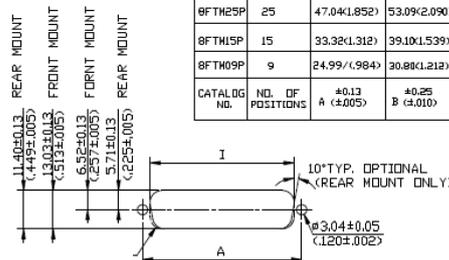

55.45(2.183)	59.08(2.326)	60.73(2.391)
38.96(1.534)	42.52(1.674)	44.27(1.743)
25.23(0.994)	28.80(1.134)	30.53(1.202)
16.92(0.666)	20.47(0.806)	22.20(0.874)
G ±0.25 (±0.010)	H ±0.13(0.005) REAR MOUNTING	I ±0.13(0.005) FRONT MOUNTING

Dieses Datenblatt wurde maschinell am 24-02-2025 erzeugt. Technische Änderungen vorbehalten.

