

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L276039930

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	320 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	115	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	60	
	Depth	60	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,449 0,412
Parameters for LED and OLED light sources:			
R9 colour rendering index value	7	Survival factor	0,90
the lumen maintenance factor	0,93		

(a) : not applicable;

(b) : not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2018-10-08 11:19:08
Specification	: L276039930	Sam. Status	:
Sample No.	: L276039930 1	Instrument	: HaasSuite(EVERFINE)
Manufacturer	: SPL	Test by	:
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 49263 (75%)
Test Mode	: Fast Test	T	: 56 ms
		Sensitivity	: High

Spectrum

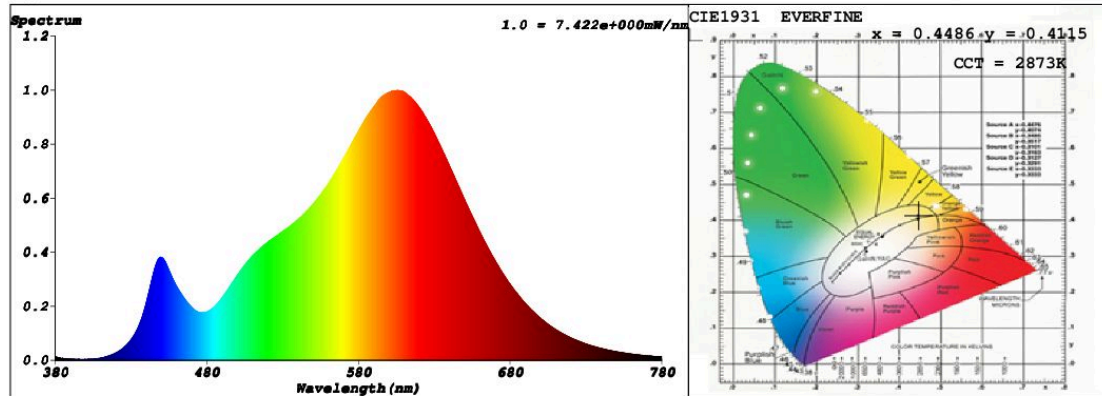

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4486$ $y = 0.4115$ / $u' = 0.2548$ $v' = 0.5260$ ($duv=1.46e-03$)

CCT= 2873K Prcp WL: $L_d=582.9nm$ Purity=58.2%

Peak WL: $L_p=606nm$ FWHM: =122.6nm Ratio:R=23.7% G=73.9% B=2.4%

Render Index: $R_a = 82.7$

R1 =81 R2 =91 R3 =97 R4 =81 R5 =81 R6 =90 R7 =83

R8 =58 R9 =7 R10=80 R11=81 R12=75 R13=83 R14=99 R15=73

LEVEL:OUT WHITE:ANSI_3000K

Photometric & Radiometric Parameters

Flux = 353.57 lm Eff. : 73.45 lm/W $F_e = 1.0750$ W

Electrical parameters

V = 60.02 V I = 0.1575 A P = 4.814 W PF = 0.5093

Schiefer Professional Lighting

www.professional-lighting.eu